

Datasheet

LuxaLight LED Back Light 5700K Protected (24 Volt, 140 LEDs, 2835, IP64)

BL-5700-140-200X100

Version: 2025-03-28.1

Product description

The **LuxaLight Backlight PCB** is designed specifically for the machine vision and robotics industries, providing a highly modular and customizable lighting solution that ensures precise and efficient illumination. With an impressive 481K Lux (KLx) output, this backlight PCB delivers exceptional brightness and uniformity, essential for accurate imaging and object detection in demanding industrial environments. The PCB is equipped with strategically placed cutouts that allow for the correct positioning of the camera lens, ensuring improved alignment and focus.

Key Features:

- **481K Lux Output (KLx):** Provides exceptional brightness and high contrast, essential for machine vision applications, resulting in detailed and accurate imaging.
- **Modular Design:** The flexible, modular design allows for easy customization for different machine vision setups and robotics applications.
- **Camera Lens Alignment Cutouts:** Strategically placed cutouts ensure accurate camera lens positioning, enhancing image clarity and sharpness.
- **24V Power Supply:** Operates on a reliable 24V system, ensuring efficient operation with low energy consumption, making it suitable for continuous use in industrial environments.
- **Real-Time Temperature Monitoring with NTC Sensor:** The integrated **NTC sensor** monitors temperature in real-time, preventing overheating and ensuring the optimal performance of the system.
- **Pulsing Capability with MaNima Pollux Industry:** The backlight PCB is compatible with the **MaNima Pollux Industry** system, enabling pulsing (strobing) for enhanced clarity and brightness, especially in high-speed applications.
- **IP64 Silicone Nano Coating:** The **IP64-rated silicone nano coating** offers extra protection against moisture, dust, and other environmental factors, making it suitable for use in harsh industrial environments.
- **Durability and Industrial Suitability:** Built for industrial applications, the backlight PCB offers long-lasting reliability, even in demanding environments.

Applications:

- **Machine Vision Systems:** Ideal for providing precise, uniform lighting for machine vision cameras, with applications such as inspection, quality control, and automated testing.
- **Robotics:** Perfect for use in robotics applications where accurate object detection, sorting, or navigation is required. The ability to pulse and precise lens alignment optimizes speed and performance.
- **Automated Manufacturing:** Suitable for use in automated production lines for quality control, assembly, and sorting, where clear imaging is critical for quality outcomes.
- **3D Scanning and Inspection:** Ideal for 3D scanning and inspection processes, where lighting is essential for capturing detailed images of complex objects and surfaces.
- **Industrial Automation:** Ideal for various industrial automation applications that require lighting for cameras and sensors in environments such as material handling, packaging, and assembly lines.

Benefits:

- **Enhanced Imaging Accuracy:** The 481K Lux output, combined with precise camera lens positioning, ensures brighter and sharper images, improving the accuracy of machine vision applications.
- **Customization and Flexibility:** The modular design allows for maximum adaptability to specific machine vision and robotics applications, ensuring optimal lighting.
- **Real-Time Temperature Management:** The **NTC sensor** ensures continuous temperature monitoring, maintaining ideal operating conditions and extending the lifespan of the PCB.
- **Increased Efficiency with Pulsing:** The **MaNima Pollux Industry Pulsing** feature allows for faster and clearer imaging, ideal for high-speed applications or environments with rapid movement.
- **Reliability and Durability:** The **IP64 silicone nano coating** provides extra protection against dust, moisture, and other environmental factors, ensuring the system performs optimally in industrial environments.

Technical specifications

General																				
Brand	LuxaLight																			
Application	Horticulture Machine Vision																			
LED type	2835																			
PCB color	White																			
Material	Aluminum																			
Dimensions	200 × 100 × 2 mm																			
Mounting	3M tape VHB4905																			
LEDs per piece	140.00																			
Lighting																				
CRI	≥ 95																			
BIN	3 SDCM																			
Beam angle	120 °																			
LB waarde	L80B50																			
Measurement results																				
PPFD	<table><tr><th>Value</th><th>Measuring distance</th></tr><tr><td>3645 μmol/m2</td><td>25 mm</td></tr><tr><td>2647 μmol/m2</td><td>50 mm</td></tr><tr><td>1789 μmol/m2</td><td>75 mm</td></tr><tr><td>1267 μmol/m2</td><td>100 mm</td></tr><tr><td>447 μmol/m2</td><td>200 mm</td></tr><tr><td>230 μmol/m2</td><td>300 mm</td></tr><tr><td>151 μmol/m2</td><td>400 mm</td></tr><tr><td>107 μmol/m2</td><td>600 mm</td></tr></table>		Value	Measuring distance	3645 μmol/m2	25 mm	2647 μmol/m2	50 mm	1789 μmol/m2	75 mm	1267 μmol/m2	100 mm	447 μmol/m2	200 mm	230 μmol/m2	300 mm	151 μmol/m2	400 mm	107 μmol/m2	600 mm
	Value	Measuring distance																		
	3645 μmol/m2	25 mm																		
	2647 μmol/m2	50 mm																		
	1789 μmol/m2	75 mm																		
	1267 μmol/m2	100 mm																		
	447 μmol/m2	200 mm																		
	230 μmol/m2	300 mm																		
	151 μmol/m2	400 mm																		
107 μmol/m2	600 mm																			
Irradiance	<table><tr><th>Value</th><th>Measuring distance</th></tr><tr><td>831 W/m2</td><td>25 mm</td></tr><tr><td>603 W/m2</td><td>50 mm</td></tr><tr><td>408 W/m2</td><td>75 mm</td></tr><tr><td>289 W/m2</td><td>100 mm</td></tr><tr><td>102 W/m2</td><td>200 mm</td></tr><tr><td>52,3 W/m2</td><td>300 mm</td></tr><tr><td>34,3 W/m2</td><td>400 mm</td></tr><tr><td>24,4 W/m2</td><td>600 mm</td></tr></table>		Value	Measuring distance	831 W/m2	25 mm	603 W/m2	50 mm	408 W/m2	75 mm	289 W/m2	100 mm	102 W/m2	200 mm	52,3 W/m2	300 mm	34,3 W/m2	400 mm	24,4 W/m2	600 mm
	Value	Measuring distance																		
	831 W/m2	25 mm																		
	603 W/m2	50 mm																		
	408 W/m2	75 mm																		
	289 W/m2	100 mm																		
	102 W/m2	200 mm																		
	52,3 W/m2	300 mm																		
	34,3 W/m2	400 mm																		
24,4 W/m2	600 mm																			

Illuminance

Value	Measuring distance
232 klux	25 mm
169 klux	50 mm
114 klux	75 mm
80 klux	100 mm
28 klux	200 mm
14,6 klux	300 mm
9,6 klux	400 mm
6,9 klux	600 mm

- By combining Pulse Mode with Real-Time Monitoring, the efficiency of LED systems can be increased, resulting in higher output.
- We have the expertise and equipment to perform measurements tailored to the specific requirements of the application.

Electronics

Working voltage	24V
Current per piece	1.25 A / piece
Power consumption per piece	30.00 W / piece
PCB material	Aluminium

Pinout

Symbol	Function
V+	V+
GND	Ground
NTC	NTC sensor
NTC_GND	NTC ground

NTC parameters	Resistance: 5000 Ohm Beta value: 3950
----------------	--


Environmental

Operating temperature	-20 ~ +60 °C
Storage temperature	-40 ~ +80 °C
IP class	IP 64

Directives - standards - certificates

Directives	RoHS CE
Safety standards	EN60598-1 EN62031 IEC62471

Measurement results

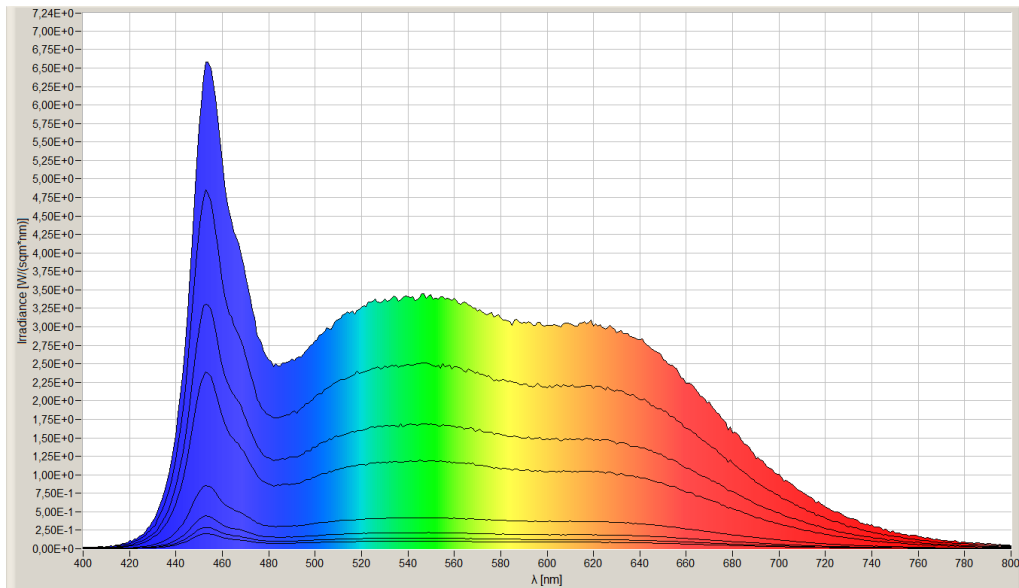

While LuxaLight has made every reasonable effort to ensure the accuracy of the information in this brochure, LuxaLight does not guarantee that it is error - free, nor does LuxaLight make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. LuxaLight reserves the right to make any adjustments to the information contained herein at any time without notice. LuxaLight expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalogue are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult LuxaLight for the latest dimensions and design specifications.