
Features:

- Applied to power repeat of synchronous changing signal;
- •4 channel RGB control, the max current of each channel up to 5 A;
- Accepts PWM control;
- •Be used to kinds of LED modules;
- •Theoretically we can connect limitless LED modules by connecting the repeaters in series.

Product Specification:

| Input Power | DC 12-24V |
|--------------|-----------------------|
| Input/output | 4 |
| channels | |
| Output power | 240W@12V/480W@24 |
| Size | 168(L)X51(W)X22(H) mm |
| Weight | 80g |

Wire Connections:

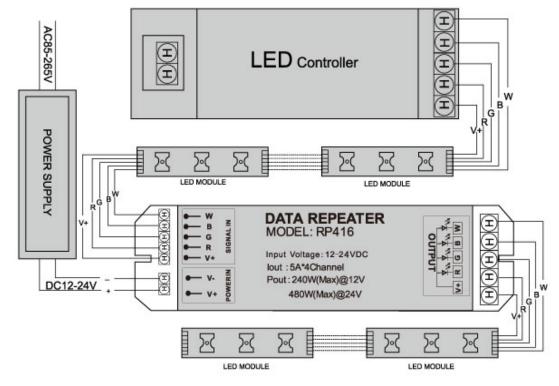

Remark

(1)C an connect various single color modules and RGB+W modules with the common anode.

②C an connect 200 pieces of RGB+W modules or 800 pieces of single color modules, or a number of high power LED lamps (according to the connection method).