

# Datasheet

## **LuxaLight LED-strip Neutral White 4300K Waterproof (24 Volt, 140 LEDs, 2835, IP68)**

**LS24NW140X2835WLX**

**Version: 2025-03-03.1**

## Product description

The **LuxaLight Professional LED Strip** is a high-quality lighting solution, ideal for both indoor and outdoor applications. The strip features a **vulcanized silicone sleeve**, offering enhanced protection against moisture, wear, and other external influences. With the **IP68** certification, the strip is fully dust-tight and resistant to immersion in water, making it perfect for use in damp environments, such as outdoor lighting or wet areas. The strip features **140 2835 LEDs** per meter and offers a **4300K color temperature**, combined with excellent color rendering (CRI > 95). These features make this LED strip ideal for applications where true-to-life lighting is required, such as in living spaces, workspaces, retail environments, and outdoor lighting.

### Key Features:

- **4300K Color Temperature:** The **4300K lighting** provides a neutral white glow, perfect for creating a bright, modern atmosphere in both commercial and residential spaces.
- **High CRI (≥95):** The excellent color rendering ensures true-to-life lighting, with colors displayed brightly and vividly, making it perfect for applications in retail, museums, and healthcare settings.
- **Vulcanized Silicone Sleeve and IP68 Certification:** The strip is equipped with a **vulcanized silicone sleeve**, providing protection against moisture, wear, and other influences. The **IP68** certification makes the strip fully dust-tight and resistant to immersion in water, making it ideal for outdoor lighting or environments exposed to moisture.
- **140 pcs 2835 LEDs per meter:** The strip features **140 2835 LEDs** per meter, ensuring even and efficient light distribution.
- **3 oz/ft² PCB Thickness:** The PCB has a thickness of 3 oz/ft², providing robust support and efficient heat dissipation, making the strip reliable and durable.
- **3M 4905 VHB Tape:** The strip is equipped with **3M 4905 VHB tape**, ensuring strong and reliable attachment to various surfaces.

### Applications:

- **Outdoor Lighting:** The **IP68** certification makes this strip perfect for outdoor lighting applications such as garden paths, patio lighting, and lighting along ponds or swimming pools.
- **Residential and Office Spaces (indoor):** The **4300K color temperature** and high CRI value make this professional LED strip ideal for creating bright and functional lighting in living rooms, offices, and conference rooms.
- **Retail and Display Windows:** The excellent color rendering ensures that products in stores and display windows are showcased at their best. The **IP68** certification makes the strip suitable for use in commercial environments exposed to weather conditions or light water splashes.
- **Museums and Galleries:** The neutral lighting and high color rendering are perfect for illuminating artworks and objects in museums, galleries, and exhibitions, where color integrity is of utmost importance.
- **Healthcare and Medical Settings:** The neutral lighting is ideal for healthcare settings, where lighting plays a key role in the well-being of patients and staff.
- **Outdoor Spaces and Swimming Pools:** Thanks to the **IP68** certification, this strip is resistant to immersion in water, making it ideal for outdoor spaces, swimming pools, or lighting projects in damp environments.

### Benefits:

- **Excellent Color Rendering:** With a CRI of over 95, the professional LED strip provides accurate and natural color rendering, making it ideal for applications where color perception is crucial.
- **Neutral Lighting:** The **4300K color temperature** delivers a neutral, white glow that is bright and inviting, perfect for workspaces and commercial environments.
- **Flexible and Customizable:** Thanks to the flexible design, the strip can be easily integrated into various lighting setups and fixtures, making it a versatile solution for diverse applications.
- **Uniform Light Distribution:** With 140 pcs 2835 LEDs per meter, the strip offers consistent and uniform light distribution, ensuring pleasant and comfortable lighting without harsh shadows.
- **Reliable Performance:** The LED strip operates on a standard 24V power supply and provides efficient, stable performance, making it an ideal choice for long-term use in both residential and commercial environments.
- **Durable and Energy-Efficient:** LED technology is energy-efficient, meaning the strip is not only cost-effective but also contributes to a more sustainable lighting solution.
- **Strong Adhesion:** The 3M 4905 VHB tape provides reliable adhesion for easy and durable installation on various surfaces.


## Technical specifications

General										
Brand	LuxaLight									
LEDs / meter	140									
LED type	2835									
Length per reel	10 m									
Length per segment	50 mm									
LED strip width	12.00 mm									
LED strip thickness	5.00 mm									
PCB color	White									
Mantle material	Silicon									
Warranty	5 years									
Lifetime	70000 hours									
Lighting										
Color temperature	4100 ~ 4300 K									
CRI	≥ 95									
Luminous Flux	≈ 3000 lm									
BIN	3 SDCM									
Beam angle	120 °									
LB waarde	L90B50									
Measurement results										
PPFD	<table><tr><th>Value</th><th>Measuring distance</th></tr><tr><td>202 µmol/m2</td><td>100 mm</td></tr><tr><td>70 µmol/m2</td><td>200 mm</td></tr><tr><td>38 µmol/m2</td><td>300 mm</td></tr></table>		Value	Measuring distance	202 µmol/m2	100 mm	70 µmol/m2	200 mm	38 µmol/m2	300 mm
	Value	Measuring distance								
	202 µmol/m2	100 mm								
	70 µmol/m2	200 mm								
38 µmol/m2	300 mm									
Electronics										
Working voltage	24V									
Current / meter	1.00 A / meter									
Power consumption per meter	24.00 W / meter									
PCB material	Copper									
Environmental										
Operating temperature	-20 ~ +60 °C									
Storage temperature	-40 ~ +80 °C									
IP class	IP 68									
Directives - standards - certificates										
Directives	RoHS CE									


Safety standards	EN60598-1 EN62031 IEC62471
------------------	----------------------------------

## Measurement results

### Wavelength

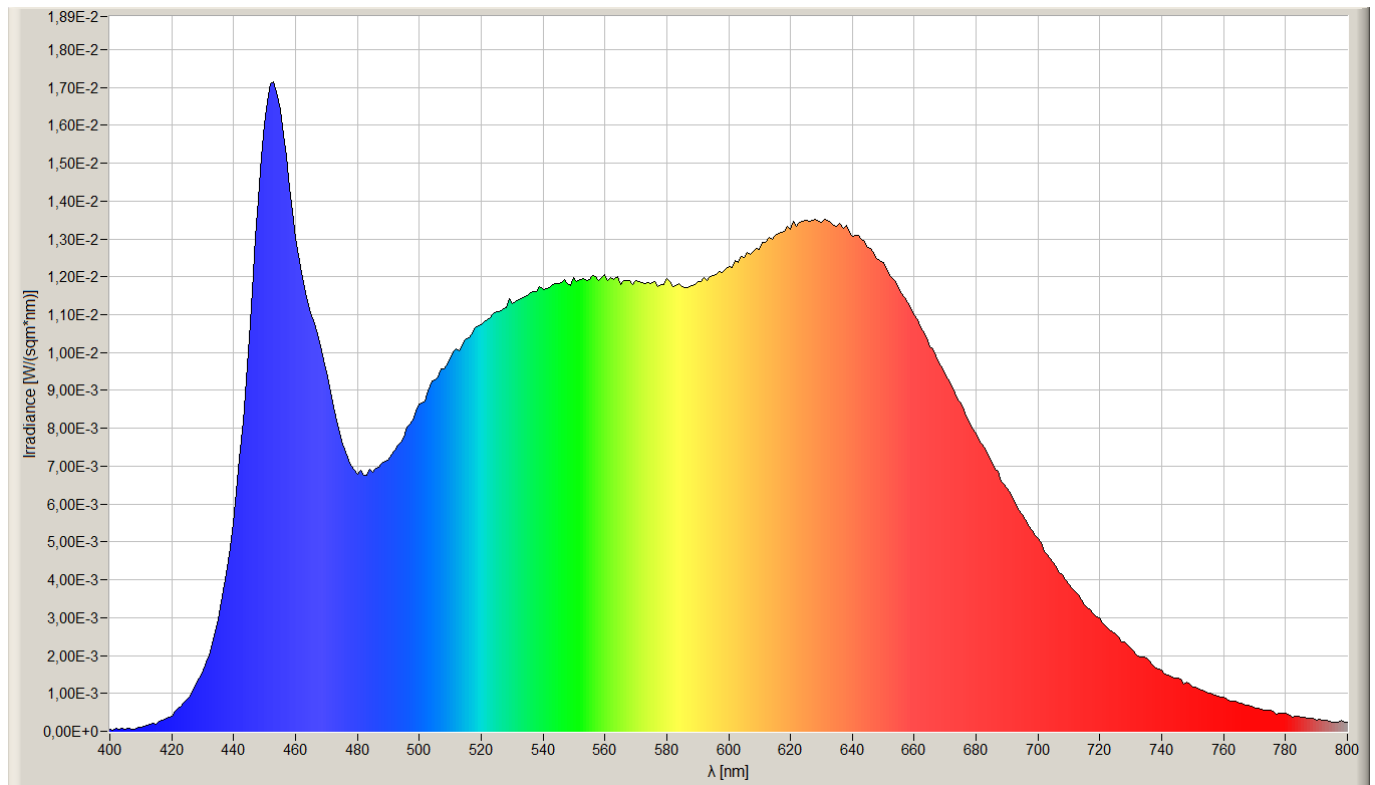

## CIE1931

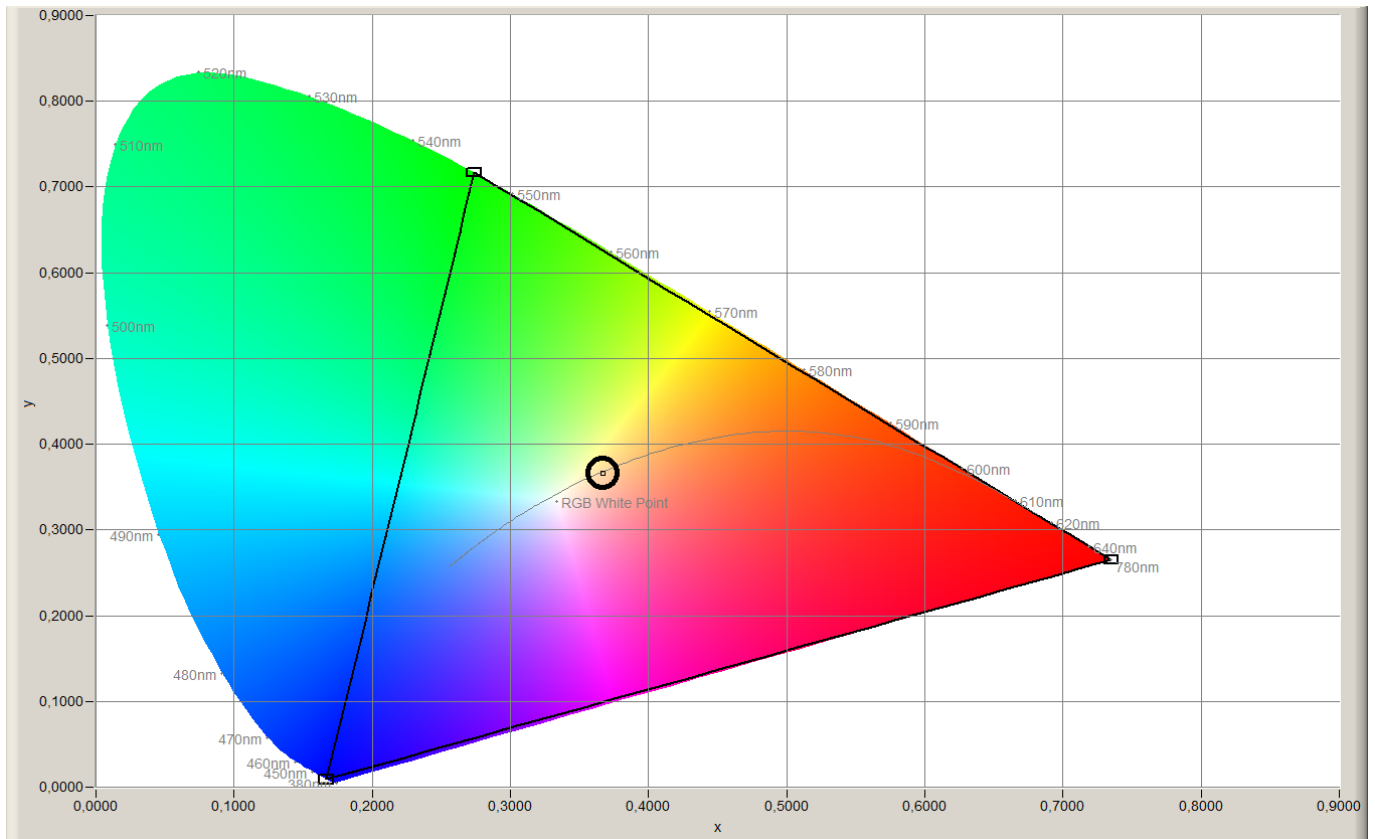

While LuxaLight has made every reasonable effort to ensure the accuracy of the information in this brochure, LuxaLight does not guarantee that it is error - free, nor does LuxaLight make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. LuxaLight reserves the right to make any adjustments to the information contained herein at any time without notice. LuxaLight expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalogue are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult LuxaLight for the latest dimensions and design specifications.