

Datasheet

LuxaLight LED Engine White 5700K Protected (24 Volt, 108 LEDs, 2835, IP64)

LE-24-5700K-108X2835PLX

Version: 2025-07-03.1

Product description

The **LuxaLight Industrial LED Engine (5700K)** is designed as a high-quality component for industrial applications that require high lumen output, precision, and exceptional color accuracy. With a **CRI of 95+** and a 5700K color temperature, this LED engine provides an ideal solution for applications such as **food inspection (Agro-Food)**, **hyper-spectral imaging**, **line scan cameras**, and **machine vision systems**, where accurate color rendering and consistent light output are crucial.

This LED engine is a semi-finished product, allowing it to be easily integrated into custom fixtures or housings based on your specific requirements. Its versatility makes it perfect for use in various industrial, research, and inspection environments where high-quality illumination is necessary for detailed analysis and accurate measurements.

Key Features:

- **5700K Color Temperature:** The 5700K natural white light provides clarity and excellent color accuracy, making it ideal for tasks like food inspection, hyper-spectral imaging, and machine vision systems where precise and clear lighting is essential.
- **CRI 95+:** With a Color Rendering Index (CRI) of 95 or higher, the LED engine ensures excellent color accuracy and true-to-life color rendering, which is critical for applications requiring accurate color differentiation, such as in food quality control and material inspection.
- **High Lumen Output:** This LED engine delivers a high lumen output, providing bright and even illumination, essential for imaging applications where clarity and precision are key.
- **Semi-Finished Product:** Designed for easy integration into custom systems or housings, the engine offers flexibility for various industrial, research, or inspection setups, particularly for machine vision and imaging systems.
- **Integration with MaNima Pollux Industry Pulsing (Strobing):** The LED engine integrates seamlessly with the MaNima Pollux Industry System, enabling high-speed pulsing (strobing) for quick exposures. This feature is ideal for high-speed imaging, allowing for fast reaction times and precise control over exposure.
- **Real-Time Temperature Monitoring via NTC Sensor:** The integrated NTC sensor ensures continuous temperature measurement and adjustment, maintaining optimal operating conditions and preventing overheating.

Applications:

- **Food Inspection (Agro-Food):** The 5700K color temperature and high CRI ensure optimal color rendering, making it ideal for food inspection, where accurate color representation is necessary for defect detection and quality control.
- **Hyper-Spectral Imaging:** The LED engine's high CRI and lumen output make it perfect for hyper-spectral imaging systems, offering clear and consistent illumination for spectral analysis of materials and substances.
- **Line Scan Cameras:** Ideal for use with line scan cameras, the high lumen output and precise color rendering ensure bright, even illumination, crucial for capturing clear, high-quality images of moving objects or surfaces in high-speed scanning applications.
- **Machine Vision Systems:** The engine's high CRI and bright illumination provide the ideal lighting for machine vision applications, enabling accurate defect detection, object recognition, and automated quality control in manufacturing and industrial automation.

Benefits:

- **High CRI for Accurate Color Rendering:** The LED engine's CRI of 95+ guarantees exceptional color accuracy, making it ideal for applications where precise color differentiation is essential for quality control and analysis.
- **High Lumen Output:** The engine's high lumen output provides bright and uniform lighting, improving clarity and enhancing the precision of image and video capture in inspection and imaging applications.
- **Fast Exposures with MaNima Pollux Integration:** Thanks to the integration with the MaNima Pollux Industry System for strobing, the engine enables rapid exposures, facilitating high-speed imaging and faster processing in real-time applications.
- **Flexibility in Integration:** As a semi-finished product, the LED engine can be easily integrated into custom enclosures or systems, offering flexibility for a wide range of applications, including food inspection, imaging, and machine vision.
- **Efficient Performance:** With consistent, high-quality light output and precise color rendering, the LED engine offers reliable performance, even in demanding environments that require accurate, high-speed processing.
- **Real-Time Temperature Monitoring for Consistent Performance:** The integrated NTC sensor, combined with the MaNima Pollux Industry System, ensures continuous temperature monitoring, preventing overheating and maintaining optimal performance over time.

Technical specifications

General		
Brand	LuxaLight	
Application	Food Inspection (Agro-Food) Hyper - spectral Imaging Line Scan Cameras Machine Vision	
LED type	2835	
PCB color	White	
Material	Aluminum	
Dimensions	200 × 20 × 2 mm	
Mounting	3M tape VHB4905	
Warranty	5 years	
LEDs per piece	108.00	
Lighting		
Color temperature	5700 ~ 5900 K	
CRI	≥ 95	
Luminous Flux	3720 lm	
BIN	3 SDCM	
Beam angle	120 °	
LB waarde	L80B50	
Measurement results		
CRI (Object size: 1 piece)	95	
CCT (Object size: 1 piece)	5833 K	
Illuminance (Lux) (Object size: 1 piece)		24V
	5cm	191400 lx
	10cm	77330 lx
	15cm	40220 lx
	20cm	24960 lx
	25cm	16510 lx
	30cm	12260 lx
Total PPFD umol/m2 (PAR 400-700nm) (Object size: 1 piece)		24V
	5cm	2991.04 umol/m2
	10cm	1212.87 umol/m2
	15cm	632.378 umol/m2
	20cm	393.149 umol/m2
	25cm	261.244 umol/m2
	30cm	193.688 umol/m2
Peak wavelength (Object size: 1 piece)	454 nm	

Peak irradiance
(Object size: 1 piece)

	24V
5cm	5.14373 W/sqm
10cm	2.15944 W/sqm
15cm	1.13656 W/sqm
20cm	0.714405 W/sqm
25cm	0.470971 W/sqm
30cm	0.349696 W/sqm

Total irradiance
(Object size: 1 piece)

	24V
5cm	682.3 W/sqm
10cm	276.9 W/sqm
15cm	144 W/sqm
20cm	89.42 W/sqm
25cm	59.4 W/sqm
30cm	43.98 W/sqm

- By combining Pulse Mode with Real-Time Monitoring, the efficiency of LED systems can be increased, resulting in higher output.
- We have the expertise and equipment to perform measurements tailored to the specific requirements of the application.

Electronics

Working voltage	24V
Current per piece	1.25 A / piece
Power consumption per piece	30.00 W / piece
PCB material	Aluminium

Pinout

Symbol	Function
V+	V+
GND	Ground
NTC	NTC sensor
NTC_GND	NTC ground

NTC parameters	Resistance: 5000 Ohm Beta value: 3950
----------------	--

Environmental


Operating temperature	-20 ~ +60 °C
Storage temperature	-40 ~ +80 °C
IP class	IP 64

Directives - standards - certificates


Directives	RoHS CE
Safety standards	EN60598-1 EN62031 IEC62471

Measurement results

irradiance - full-spectrum (24V)

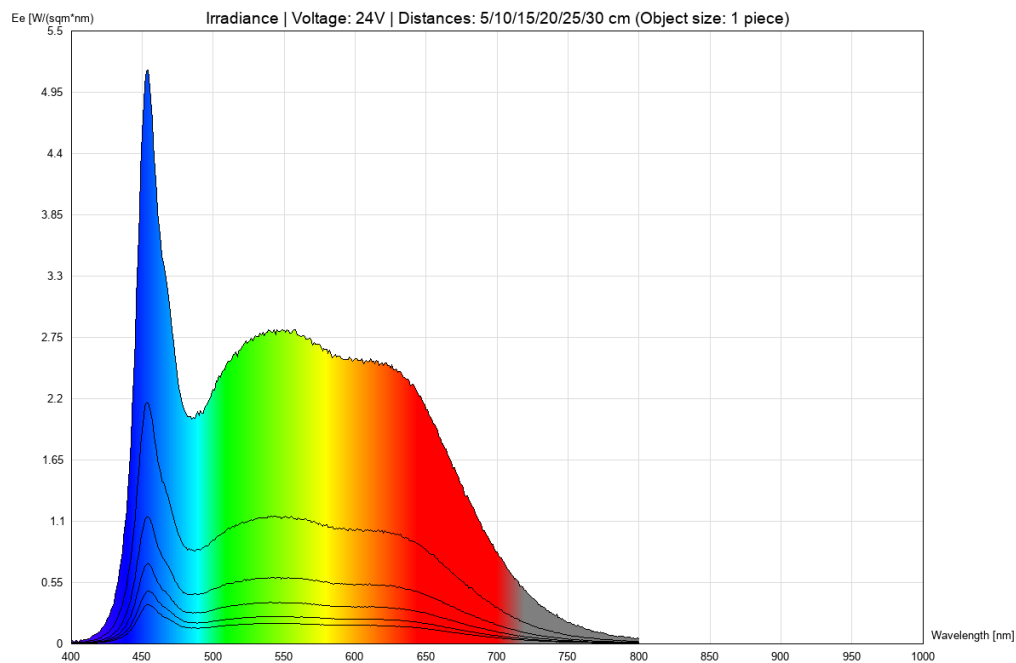

cie1931

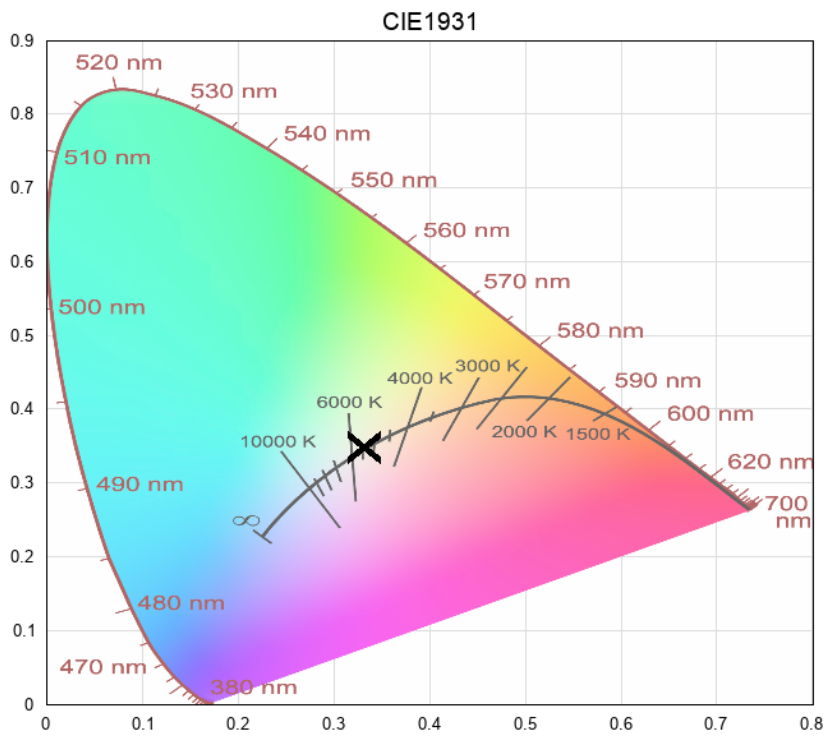

While LuxaLight has made every reasonable effort to ensure the accuracy of the information in this brochure, LuxaLight does not guarantee that it is error - free, nor does LuxaLight make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. LuxaLight reserves the right to make any adjustments to the information contained herein at any time without notice. LuxaLight expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalogue are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult LuxaLight for the latest dimensions and design specifications.