

## Datasheet

### **LuxaLight Industrial LED Fixture Transparent cover Neutral White Full Spectrum 4200K 24.2x16mm (24 Volt, 2835, IP64)**

**LF-24-4200-24.2X16-TC**

**Version: 2025-07-09.2**

## Product description

The LuxaLight Industrial LED Engine (4200K) is a high-quality fixture, specially designed for applications requiring high light output, precision, and excellent color rendering. The fixture is made from durable aluminum, which not only ensures a robust and reliable construction but also provides excellent *heat management* performance. The design is optimized to prevent overheating and maximize efficiency. The transparent cover offers additional mechanical protection, enhancing the durability of the unit, even in demanding environments.

### Key Features:

- **4200K Color Temperature:** The neutral white light at 4200K provides a balanced spectrum, with a strong focus on the 650 nm and 675 nm wavelengths for red light, essential for photosynthesis and plant growth. The LED engine also has a high peak at 450 nm, ideal for promoting chlorophyll production and other biological processes.
- **High PAR Flux (2726  $\mu\text{mol}/\text{m}^2/\text{s}$  at 5 cm):** The LED engine delivers high light intensity in the form of PAR, ideal for promoting photosynthesis and plant growth. This makes it an excellent choice for horticulture and other applications requiring intense light.
- **Aluminum Fixture for Optimal Heat Management:** The fixture is made from high-quality aluminum, which ensures efficient heat dissipation and optimizes the performance of the LED engine. This helps prevent overheating, ensuring the product operates at its best at all times.
- **Transparent Cover for Mechanical Protection:** The sturdy, transparent cover provides additional protection against physical damage, making the fixture suitable for use in various industrial and horticultural environments.
- **Easy Integration:** The LED engine is designed for easy integration into existing systems or enclosures, providing flexibility for a wide range of horticultural and light-related applications.
- **Real-Time Temperature Monitoring via NTC Sensor:** The integrated NTC sensor continuously measures and adjusts temperature, maintaining optimal operating conditions. This prevents overheating and ensures the LED engine always performs at its best, maximizing output for consistent and long-lasting results.

### Applications:

- **Horticulture and Plant Lighting:** The 4200K color temperature and high PAR flux make this LED engine ideal for horticultural applications, where a broad spectrum of light is necessary to promote photosynthesis, with a strong focus on 650 nm and 675 nm for red light and a peak at 450 nm for blue light. This makes it perfect for applications such as growing facilities, vertical farming, and commercial cultivation.
- **Plant Research and Growth Optimization:** With its balanced light spectrum, including specific wavelengths of 650 nm, 675 nm, and 450 nm, the LED engine is ideal for scientific research on plant growth, photosynthesis, and other biological processes influenced by light intensity and quality.
- **Growing Facilities and Vertical Farming:** The LED engine provides powerful lighting for controlled growing environments in greenhouses, vertical farming, and other indoor growing applications, where specific light spectrums and high PAR flux are essential for maximum yield and plant health.
- **Plant and Product Quality Control:** The LED engine is also suitable for quality control of plants, crops, or other biological products in agriculture and horticulture, providing consistent lighting that accurately simulates growth conditions.

### Benefits:

- **Full Spectrum with High Peaks at 450 nm and Red Light (650 nm & 675 nm):** The extensive light spectrum, with specific wavelengths for blue light (450 nm) and red light (650 nm & 675 nm), offers powerful lighting for photosynthesis and plant growth.
- **High PAR Flux:** The high PAR flux of 2726  $\mu\text{mol}/\text{m}^2/\text{s}$  at 5 cm ensures sufficient light intensity, essential for promoting healthy plant growth, especially in commercial growing environments.
- **Integration Flexibility:** The LED engine can be easily integrated into existing systems or enclosures, providing flexibility for applications in greenhouses, vertical farming, and other horticulture-related setups.
- **Efficient Performance:** The LED engine offers reliable and efficient performance with consistent light output, making it ideal for intensive growth applications, such as horticulture, where long-lasting and dependable lighting is required.
- **Real-Time Temperature Monitoring for Consistent Performance:** The integrated NTC sensor ensures continuous temperature monitoring, preventing overheating and maintaining optimal performance over time. This contributes to maximizing the LED engine's yield, which is crucial for maintaining high performance in a dynamic environment.

## Technical specifications

General		
Brand	LuxaLight	
Application	Food Inspection (Agro-Food) Hyper - spectral Imaging Line Scan Cameras Machine Vision	
LED type	2835	
Material	Aluminum	
Dimensions	220 × 24,2 × 16 mm	
Mounting	Surface mounted	
Warranty	5 years	
Cover type	PMMA transparent	
LEDs per piece	108.00	
Lifetime	70000 hours	
Lighting		
Color temperature	4200 K	
CRI	≥ 95	
Luminous Flux	3720 lm	
BIN	3 SDCM	
Beam angle	120 °	
LB waarde	L80B50	
Measurement results		
CRI (Object size: 1 piece)	91	
CCT (Object size: 1 piece)	4370 K	
Illuminance (Lux) (Object size: 1 piece)		24V
	5cm	215100 lx
	10cm	81620 lx
	15cm	41970 lx
	20cm	25990 lx
	25cm	17500 lx
	30cm	13130 lx
Total PPFD umol/m2 (PAR 400-700nm) (Object size: 1 piece)		24V
	5cm	3295.42 umol/m2
	10cm	1250.16 umol/m2
	15cm	643.615 umol/m2
	20cm	398.71 umol/m2
	25cm	268.668 umol/m2
	30cm	201.382 umol/m2
Peak wavelength (Object size: 1 piece)	452 nm	

Peak irradiance (Object size: 1 piece)		24V
	5cm	4.27309 W/sqm
	10cm	1.67554 W/sqm
	15cm	0.867289 W/sqm
	20cm	0.538581 W/sqm
	25cm	0.363114 W/sqm
	30cm	0.272948 W/sqm

Total irradiance (Object size: 1 piece)		24V
	5cm	742.9 W/sqm
	10cm	281.7 W/sqm
	15cm	144.8 W/sqm
	20cm	89.78 W/sqm
	25cm	60.43 W/sqm
	30cm	45.25 W/sqm

- By combining Pulse Mode with Real-Time Monitoring, the efficiency of LED systems can be increased, resulting in higher output.
- We have the expertise and equipment to perform measurements tailored to the specific requirements of the application.

## Electronics

Working voltage	24V										
Current per piece	1.25 A / piece										
Power consumption per piece	30.00 W / piece										
PCB material	Aluminium										
Pinout	<table> <tr> <th>Symbol</th><th>Function</th></tr> <tr> <td>V+</td><td>V+</td></tr> <tr> <td>GND</td><td>Ground</td></tr> <tr> <td>NTC</td><td>NTC sensor</td></tr> <tr> <td>NTC_GND</td><td>NTC ground</td></tr> </table>	Symbol	Function	V+	V+	GND	Ground	NTC	NTC sensor	NTC_GND	NTC ground
Symbol	Function										
V+	V+										
GND	Ground										
NTC	NTC sensor										
NTC_GND	NTC ground										

NTC parameters	Resistance: 5000 Ohm Beta value: 3950
----------------	--

## Environmental


Operating temperature	-20 ~ +60 °C
Storage temperature	-40 ~ +80 °C
IP class	IP 64

## Directives - standards - certificates


Directives	RoHS CE
Safety standards	EN60598-1 EN62031 IEC62471

## Measurement results

### irradiance - full-spectrum (24V)

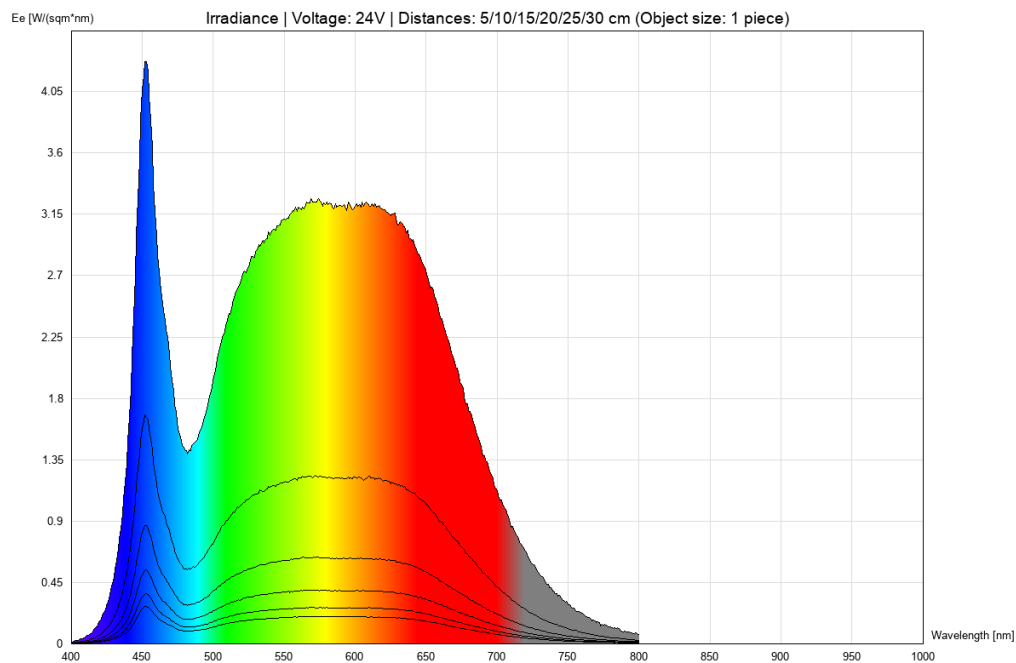

## cie1931

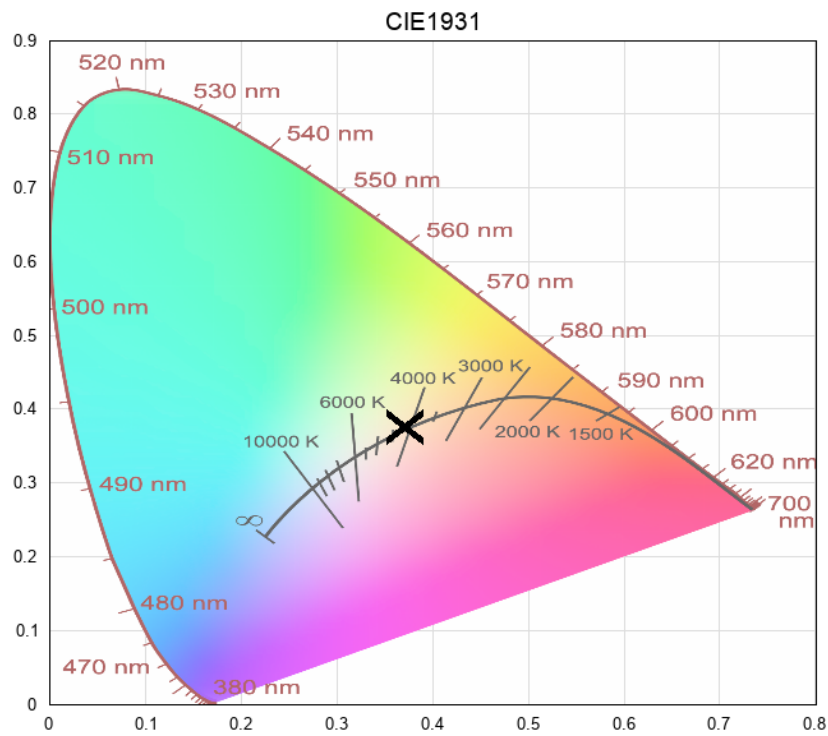

While LuxaLight has made every reasonable effort to ensure the accuracy of the information in this brochure, LuxaLight does not guarantee that it is error - free, nor does LuxaLight make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. LuxaLight reserves the right to make any adjustments to the information contained herein at any time without notice. LuxaLight expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalogue are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult LuxaLight for the latest dimensions and design specifications.