

Datasheet

LuxaLight Industrial LED Fixture Transparent IP68 Neutral White Full Spectrum 4800K 24.2x16mm (24 Volt, 2835, IP68)

LF-24-4800K-24.2X16-PU

Version: 2025-07-11.1

Product description

The **LuxaLight Industrial LED Fixture (4800K)** is designed as a high-quality lighting component for applications requiring high light output, precision, and excellent color rendering. This LED fixture consists of **54 LEDs with 4200K** and **54 LEDs with 5700K**, resulting in a total color temperature of **4800K**. This balanced spectrum offers an ideal solution for **horticulture**, **plant research**, and **scientific environments**, where a full spectrum of light is essential for photosynthesis and plant growth.

Key Features:

- **4800K Color Temperature:** The combination of 4200K and 5700K LEDs creates a balanced 4800K spectrum, offering neutral white light that is ideal for applications in **horticulture** and **plant research**. This spectrum is optimized for plant growth and supports effective photosynthesis.
- **High PPFD Output (3226 $\mu\text{mol}/\text{m}^2/\text{s}$ at 5 cm):** The LED fixture produces high light intensity, ideal for promoting photosynthesis and healthy plant growth. This makes it an excellent choice for **scientific research** and other related applications requiring powerful lighting.
- **Polyurethane Encapsulation (IP68 & IK10):** The LED fixture is fully encapsulated in **polyurethane (PU)**, making it **completely waterproof (IP68)**. This offers excellent protection against water and dust. Additionally, it has a **high IK rating (IK10)**, meaning it is resistant to heavy mechanical impacts and shocks, ideal for use in demanding environments.
- **Fully Finished Product:** The LED fixture is a **fully finished product**, ready for direct integration into systems or installations. This provides convenience and saves time when implementing applications in **horticulture**, **plant research**, or other light-related environments.
- **Real-Time Temperature Monitoring via NTC Sensor (in combination with Pollux Industry):** The integrated **NTC sensor** ensures continuous temperature measurement and adjustment. When used in combination with **Pollux Industry**, the sensor maintains optimal operating conditions, preventing overheating and ensuring the LED fixture consistently performs at its best. This combination maximizes output and contributes to reliable, long-lasting results.

Applications:

- **Horticulture and Plant Lighting:** The 4800K color temperature and high PPFD output make this LED fixture ideal for **horticultural** applications, where a broad light spectrum is required to promote photosynthesis. This makes the LED fixture perfect for **growing facilities**, **vertical farming**, and **commercial cultivation**.
- **Plant Research and Growth Optimization:** With its balanced light spectrum, the LED fixture is ideal for scientific research into plant growth, photosynthesis, and other biological processes influenced by light intensity and quality.
- **Scientific Research Environments:** The LED fixture provides powerful lighting for controlled research environments, where specific light spectrums and high PPFD output are essential for studying plant growth and photosynthesis in scientific applications.
- **Quality Control in Agriculture and Horticulture:** The LED fixture is also suitable for quality control of plants, crops, or other biological products in **agriculture** and **horticulture**, offering consistent lighting that accurately simulates growth conditions.

Benefits:

- **Full Spectrum Lighting:** The combination of **4200K** and **5700K** LEDs provides a broad spectrum, delivering powerful lighting for photosynthesis and plant growth, ideal for **horticulture** and **research**.
- **High PPFD Output:** The high PPFD output of **3226 $\mu\text{mol}/\text{m}^2/\text{s}$ at 5 cm** ensures sufficient light intensity, promoting healthy plant growth, especially in **scientific research** and commercial applications.
- **Robust Protection (IP68 & IK10):** The **fully encapsulated PU housing** offers **complete waterproofing (IP68)** and **high impact resistance (IK10)**, making the fixture resistant to harsh conditions and ideal for use in rugged environments.
- **Integration Flexibility:** The LED fixture can be easily integrated into existing systems or enclosures, offering flexibility for applications in **growing facilities**, **vertical farming**, **laboratories**, and other **horticulture and research applications**.
- **Efficient Performance:** The LED fixture provides reliable and efficient performance with consistent light output, making it ideal for intensive growth applications like **horticulture** and **scientific research**, where long-lasting and dependable lighting is required.
- **Real-Time Temperature Monitoring for Consistent Performance:** The integrated **NTC sensor** works in combination with **Pollux Industry**, ensuring continuous temperature monitoring, preventing overheating, and maintaining optimal performance over time. This contributes to maximizing the output of the LED fixture, essential for maintaining high performance in a dynamic environment.

Technical specifications

General		
Brand	LuxaLight	
Application	Food Inspection (Agro-Food) Hyper - spectral Imaging Line Scan Cameras Machine Vision	
LED type	2835	
Material	Aluminum	
Dimensions	220 × 24,2 × 16 mm	
Mounting	Surface mounted	
Cover type	Polyurethane	
LEDs per piece	108.00	
Lighting		
Color temperature	4800 K	
Beam angle	120 °	
Measurement results		
CRI (Object size: 1 piece)	93	
CCT (Object size: 1 piece)	4739 K	
Illuminance (Lux) (Object size: 1 piece)		24V
	5cm	279800 lx
	10cm	92910 lx
	15cm	45840 lx
	20cm	27440 lx
	25cm	18040 lx
	30cm	13330 lx
Total PPFD umol/m2 (PAR 400-700nm) (Object size: 1 piece)		24V
	5cm	4328.16 umol/m2
	10cm	1442.5 umol/m2
	15cm	712.817 umol/m2
	20cm	426.977 umol/m2
	25cm	280.702 umol/m2
	30cm	207.399 umol/m2
Peak wavelength (Object size: 1 piece)	453 nm	
Peak irradiance (Object size: 1 piece)		24V
	5cm	5.93668 W/sqm
	10cm	2.04034 W/sqm
	15cm	1.01999 W/sqm
	20cm	0.613115 W/sqm
	25cm	0.403597 W/sqm
	30cm	0.29951 W/sqm

Total irradiance
(Object size: 1 piece)

	24V
5cm	977.8 W/sqm
10cm	326.1 W/sqm
15cm	160.9 W/sqm
20cm	96.27 W/sqm
25cm	63.21 W/sqm
30cm	46.78 W/sqm

- By combining Pulse Mode with Real-Time Monitoring, the efficiency of LED systems can be increased, resulting in higher output.
- We have the expertise and equipment to perform measurements tailored to the specific requirements of the application.

Electronics

Working voltage	24V
Current per piece	1.25 A / piece
Power consumption per piece	30.00 W / piece
PCB material	Aluminium

Pinout

Symbol	Function
V+	V+
GND	Ground
NTC	NTC sensor
NTC_GND	NTC ground

NTC parameters	Resistance: 5000 Ohm Beta value: 3950
----------------	--

Environmental


Operating temperature	-20 ~ +60 °C
Storage temperature	-40 ~ +80 °C
IP class	IP 68

Directives - standards - certificates


Directives	RoHS CE
Safety standards	EN60598-1 EN62031 IEC62471

Measurement results

irradiance - full-spectrum (24V)

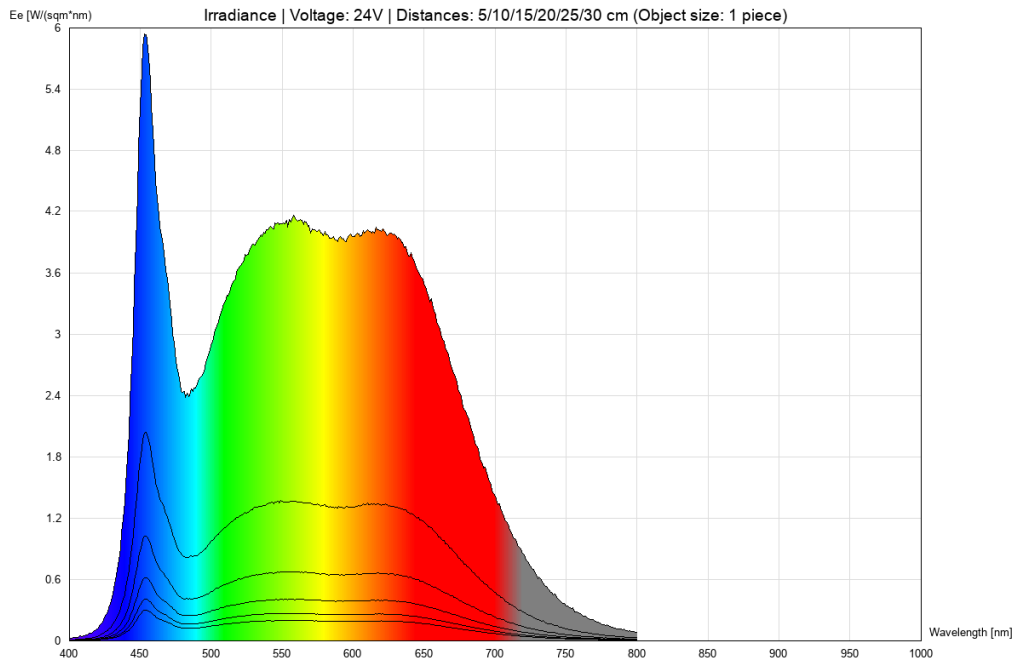

cie1931

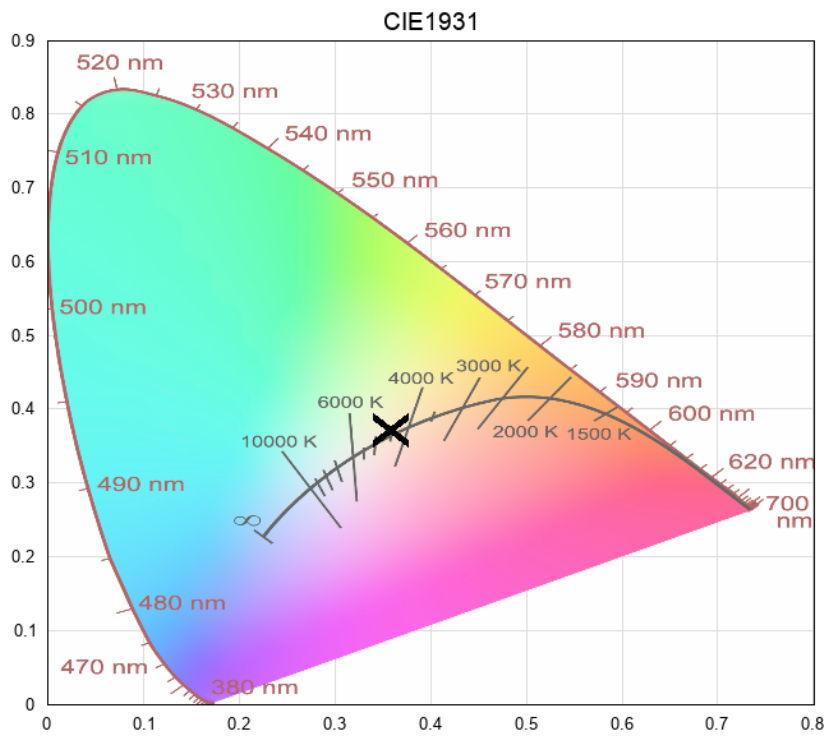

While LuxaLight has made every reasonable effort to ensure the accuracy of the information in this brochure, LuxaLight does not guarantee that it is error - free, nor does LuxaLight make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. LuxaLight reserves the right to make any adjustments to the information contained herein at any time without notice. LuxaLight expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalogue are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult LuxaLight for the latest dimensions and design specifications.