

Datasheet

LuxaLight Industrial LED Fixture Transparent cover Neutral White Full Spectrum 4800K 24.2x16mm (24 Volt, 2835, IP64)

LF-24-4800K-24.2X16-TC

Version: 2025-07-10.2

Product description

The **LuxaLight Industrial LED Fixture (4800K)** is designed as a high-quality lighting component for applications requiring high light output, precision, and excellent color rendering. This LED fixture consists of **54 LEDs with 4200K** and **54 LEDs with 5700K**, resulting in a total color temperature of **4800K**. This balanced spectrum offers an ideal solution for **horticulture**, **plant research**, and **scientific environments**, where a full spectrum of light is essential for photosynthesis and plant growth.

Key Features:

- **4800K Color Temperature:** The combination of 4200K and 5700K LEDs creates a balanced 4800K spectrum, offering neutral white light that is ideal for applications in **horticulture** and **plant research**. This spectrum is optimized for plant growth and supports effective photosynthesis.
- **High PPFD Output (3226 $\mu\text{mol}/\text{m}^2/\text{s}$ at 5 cm):** The LED fixture produces a high light intensity, ideal for promoting photosynthesis and healthy plant growth. This makes it an excellent choice for **scientific research** and other related applications that require powerful lighting.
- **Aluminum Housing for Heat Management:** The fixture is made of **aluminum**, which ensures efficient heat dissipation and optimal performance, even during extended use. This contributes to the long lifespan and performance of the fixture.
- **Transparent Cover for Mechanical Protection:** The transparent cover protects the LEDs from mechanical damage, increasing the fixture's durability and reliability.
- **Fully Finished Product:** The LED fixture is a **fully finished product**, ready for direct integration into systems or installations. This provides convenience and saves time when implementing applications in **horticulture**, **plant research**, or other light-related environments.
- **Real-Time Temperature Monitoring via NTC Sensor (in combination with Pollux Industry):** The integrated **NTC sensor** ensures continuous temperature measurement and adjustment. When used in combination with **Pollux Industry**, the sensor maintains optimal operating conditions, preventing overheating and ensuring the LED fixture consistently performs at its best. This combination maximizes output and contributes to reliable, long-lasting results.

Applications:

- **Horticulture and Plant Lighting:** The 4800K color temperature and high PPFD output make this LED fixture ideal for **horticultural** applications, where a broad light spectrum is required to promote photosynthesis. This makes the fixture perfect for **growing facilities**, **vertical farming**, and **commercial cultivation**.
- **Plant Research and Growth Optimization:** With its balanced light spectrum, the LED fixture is ideal for scientific research into plant growth, photosynthesis, and other biological processes influenced by light intensity and quality.
- **Scientific Research Environments:** The LED fixture provides powerful lighting for controlled research environments, where specific light spectrums and high PPFD output are essential for studying plant growth and photosynthesis in scientific applications.
- **Quality Control in Agriculture and Horticulture:** The LED fixture is also suitable for quality control of plants, crops, or other biological products in **agriculture** and **horticulture**, offering consistent lighting that accurately simulates growth conditions.

Benefits:

- **Full Spectrum Lighting:** The combination of **4200K** and **5700K** LEDs provides a broad spectrum, delivering powerful lighting for photosynthesis and plant growth, ideal for **horticulture** and **research**.
- **High PPFD Output:** The high PPFD output of **3226 $\mu\text{mol}/\text{m}^2/\text{s}$ at 5 cm** ensures sufficient light intensity, promoting healthy plant growth, especially in **scientific research** environments and commercial applications.
- **Integration Flexibility:** The LED fixture can easily be integrated into existing systems or enclosures, offering flexibility for applications in **growing facilities**, **vertical farming**, **laboratories**, and other **horticulture and research-related environments**.
- **Efficient Performance:** The LED fixture provides reliable and efficient performance with consistent light output, making it ideal for intensive growth applications such as **horticulture** and **scientific research**, where long-lasting and dependable lighting is required.
- **Real-Time Temperature Monitoring for Consistent Performance:** The integrated **NTC sensor**, when used in combination with **Pollux Industry**, ensures continuous temperature monitoring, preventing overheating and maintaining optimal performance over time. This contributes to maximizing the LED fixture's output, which is essential for maintaining high performance in a dynamic environment.

Technical specifications

General

Brand	LuxaLight
Application	Food Inspection (Agro-Food) Hyper - spectral Imaging Line Scan Cameras Machine Vision
LED type	2835
Material	Aluminum
Dimensions	220 × 24,2 × 16 mm
Mounting	Surface mounted
Warranty	5 years
Cover type	PMMA transparent
LEDs per piece	108.00
Lifetime	70000 hours

Lighting

Color temperature	4800 K
CRI	≥ 95
Luminous Flux	3720 lm
BIN	3 SDCM
Beam angle	120 °
LB waarde	L80B50

Measurement results

CRI (Object size: 1 piece)	93														
CCT (Object size: 1 piece)	4920 K														
Illuminance (Lux) (Object size: 1 piece)	<table><tr><th></th><th>24V</th></tr><tr><td>5cm</td><td>187100 lx</td></tr><tr><td>10cm</td><td>74750 lx</td></tr><tr><td>15cm</td><td>38480 lx</td></tr><tr><td>20cm</td><td>23880 lx</td></tr><tr><td>25cm</td><td>16160 lx</td></tr><tr><td>30cm</td><td>12170 lx</td></tr></table>		24V	5cm	187100 lx	10cm	74750 lx	15cm	38480 lx	20cm	23880 lx	25cm	16160 lx	30cm	12170 lx
	24V														
5cm	187100 lx														
10cm	74750 lx														
15cm	38480 lx														
20cm	23880 lx														
25cm	16160 lx														
30cm	12170 lx														
Total PPFD umol/m2 (PAR 400-700nm) (Object size: 1 piece)	<table><tr><th></th><th>24V</th></tr><tr><td>5cm</td><td>2918.42 umol/m2</td></tr><tr><td>10cm</td><td>1167.06 umol/m2</td></tr><tr><td>15cm</td><td>600.707 umol/m2</td></tr><tr><td>20cm</td><td>373.353 umol/m2</td></tr><tr><td>25cm</td><td>252.442 umol/m2</td></tr><tr><td>30cm</td><td>189.882 umol/m2</td></tr></table>		24V	5cm	2918.42 umol/m2	10cm	1167.06 umol/m2	15cm	600.707 umol/m2	20cm	373.353 umol/m2	25cm	252.442 umol/m2	30cm	189.882 umol/m2
	24V														
5cm	2918.42 umol/m2														
10cm	1167.06 umol/m2														
15cm	600.707 umol/m2														
20cm	373.353 umol/m2														
25cm	252.442 umol/m2														
30cm	189.882 umol/m2														
Peak wavelength (Object size: 1 piece)	454 nm														

Peak irradiance

(Object size: 1 piece)

	24V
5cm	4.42247 W/sqm
10cm	1.7722 W/sqm
15cm	0.924298 W/sqm
20cm	0.577731 W/sqm
25cm	0.389644 W/sqm
30cm	0.292744 W/sqm

Total irradiance

(Object size: 1 piece)

	24V
5cm	662.2 W/sqm
10cm	264.2 W/sqm
15cm	136 W/sqm
20cm	84.51 W/sqm
25cm	57.06 W/sqm
30cm	42.86 W/sqm

- By combining Pulse Mode with Real-Time Monitoring, the efficiency of LED systems can be increased, resulting in higher output.
- We have the expertise and equipment to perform measurements tailored to the specific requirements of the application.

Electronics

Working voltage	24V
Current per piece	1.25 A / piece
Power consumption per piece	30.00 W / piece
PCB material	Aluminium

Pinout

Symbol	Function
V+	V+
GND	Ground
NTC	NTC sensor
NTC_GND	NTC ground

NTC parameters	Resistance: 5000 Ohm Beta value: 3950
----------------	--

Environmental


Operating temperature	-20 ~ +60 °C
Storage temperature	-40 ~ +80 °C
IP class	IP 64

Directives - standards - certificates


Directives	RoHS CE
Safety standards	EN60598-1 EN62031 IEC62471

Measurement results

irradiance - full-spectrum (24V)

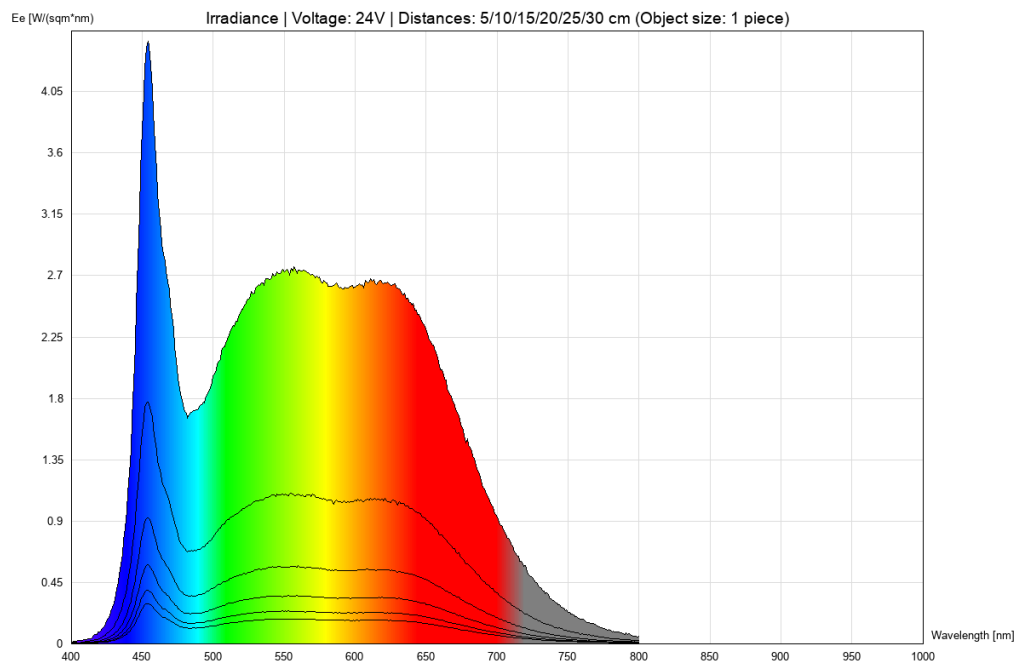

cie1931

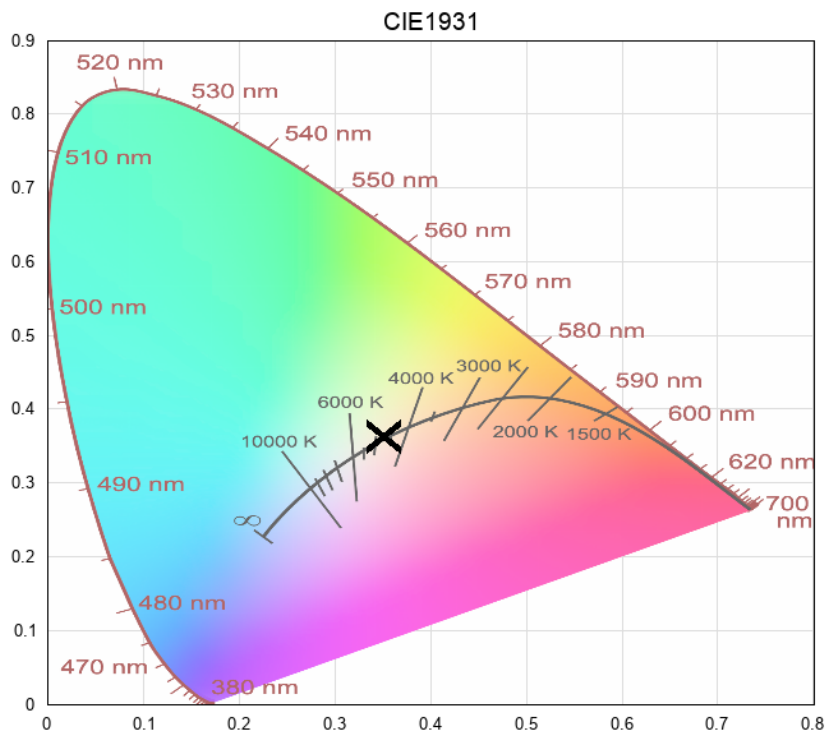

While LuxaLight has made every reasonable effort to ensure the accuracy of the information in this brochure, LuxaLight does not guarantee that it is error - free, nor does LuxaLight make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. LuxaLight reserves the right to make any adjustments to the information contained herein at any time without notice. LuxaLight expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalogue are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult LuxaLight for the latest dimensions and design specifications.