

Datasheet

LuxaLight Industrial LED Fixture Polarised cover Near Infrared 860nm 24.2x16mm (24 Volt, 2835, IP64)

LF-24-860-24.2X16-POL

Version: 2025-07-10.3

Product description

The **LuxaLight Industrial LED Fixture** is designed for intensive industrial applications that require high radiation intensity for a wide range of processes. With **860nm near-infrared (NIR) radiation**, this LED fixture provides a reliable and efficient solution for industrial processes that benefit from **near-infrared radiation**, such as material curing, photochemical reactions, and quality inspection.

The fixture is made from a **durable aluminum housing**, ensuring efficient heat dissipation and long-lasting performance. The **polarized cover** offers protection against dust and moisture (IP64) and provides the flexibility to choose the radiation beam angle between **30°, 60°, 90°, or 120°**, depending on your specific application needs.

Key Features:

- **860nm Near-Infrared Radiation:** The **860nm wavelength** is ideal for industrial applications requiring **near-infrared radiation**, enhancing processes such as material curing, photochemical reactions, and quality inspection.
- **Polarized Cover (IP64):** The fixture features a **polarized cover** providing protection against dust and moisture (IP64), and offers a choice of radiation beam angle: **30°, 60°, 90°, or 120°**, depending on the application.
- **Aluminum Housing:** The durable **aluminum housing** ensures optimal heat dissipation, contributing to stable and long-term operation.
- **24V Power Supply:** The fixture operates on a reliable 24V power supply, ensuring stable and consistent performance, ideal for demanding industrial applications.
- **Integration with MaNima Pollux Industry Pulsing (Strobing):** The LED fixture supports integration with the MaNima Pollux Industry System for pulsing (strobing), significantly increasing radiation intensity. This feature enables faster reactions and enhanced efficiency in industrial processes.
- **Real-Time Temperature Monitoring via NTC Sensor:** The integrated NTC sensor allows continuous temperature measurement and adjustment via the MaNima Pollux Industry System. This helps maintain the optimal operating temperature for maximum radiation output and consistent performance.

Industrial Applications:

- **Material Curing & Hardening:** **860nm near-infrared radiation** is commonly used in the curing process of coatings, adhesives, and materials that respond to infrared radiation, accelerating curing times in production environments.
- **Photochemical Processes:** The **860nm wavelength** can be used in industrial and scientific environments where specific photochemical reactions are required, accelerating reactions in laboratories or production lines.
- **Quality Control & Inspection:** **860nm NIR** is ideal for inspecting materials or products for defects or irregularities in industrial environments, improving quality control.
- **Food Processing & Sterilization:** The fixture is used in food production for sterilization and pasteurization, enhancing food safety and processing efficiency by delivering consistent near-infrared radiation.
- **Non-UV Material Curing & Hardening:** The **860nm radiation** is used for curing various materials that do not require UV light but benefit from NIR wavelengths, such as plastics, rubbers, and other composite materials, speeding up the curing process.
- **Natural & Artificial Drying:** The **860nm wavelength** helps dry a wide range of materials such as paper, textiles, and wood, by accelerating moisture evaporation without damaging the product. This is especially useful in printing and textile industries.
- **Metal & Material Processing:** **860nm NIR** is applied to improve the properties of coatings or accelerate the curing of certain materials, reducing processing times in manufacturing and enhancing efficiency.

Benefits:

- **High Radiation Intensity for Faster Processes:** The fixture can pulse with the MaNima Pollux Industry System to increase radiation intensity, reducing processing time and increasing productivity in industrial applications.
- **Real-Time Temperature Monitoring for Consistent Performance:** Continuous temperature monitoring with the integrated NTC sensor helps maintain optimal operating temperatures, preventing overheating and ensuring a longer lifespan for the fixture.
- **Industrial Durability:** The **aluminum housing** provides a robust and durable construction, capable of withstanding the challenges of harsh industrial environments, while the **polarized cover** ensures protection against dust and moisture, increasing the fixture's reliability.
- **Efficiency & Speed:** The LED fixture delivers efficient performance, with quick and reliable operation contributing to increased productivity and processing efficiency, essential for industrial production systems.

Technical specifications

General		
Brand	LuxaLight	
Application	Hyper - spectral Imaging Machine Vision	
LED type	2835	
Material	Aluminum	
Dimensions	220 × 24,2 × 16 mm	
Mounting	Surface mounted	
Cover type	PMMA Polarised transparent	
LEDs per piece	108.00	
Lighting		
Wave length	860nm	
Measurement results		
Peak wavelength (Object size: 1 piece)	852 nm	
Peak irradiance (Object size: 1 piece)		24V
	5cm	8.03401 W/sqm
	10cm	3.29765 W/sqm
	15cm	1.6601 W/sqm
	20cm	1.00985 W/sqm
	25cm	0.675721 W/sqm
	30cm	0.502538 W/sqm
Total irradiance (Object size: 1 piece)		24V
	5cm	345.3 W/sqm
	10cm	139 W/sqm
	15cm	70.86 W/sqm
	20cm	43.26 W/sqm
	25cm	28.72 W/sqm
	30cm	21.44 W/sqm
<ul style="list-style-type: none">• By combining Pulse Mode with Real-Time Monitoring, the efficiency of LED systems can be increased, resulting in higher output.• We have the expertise and equipment to perform measurements tailored to the specific requirements of the application.		
Electronics		
Working voltage	24V	
Current per piece	1.25 A / piece	
Power consumption per piece	30.00 W / piece	
PCB material	Aluminium	

Pinout

Symbol	Function
V+	V+
GND	Ground
NTC	NTC sensor
NTC_GND	NTC ground

NTC parameters

Resistance: 5000 Ohm
Beta value: 3950

Environmental

Operating temperature -20 ~ +60 °C

Storage temperature -40 ~ +80 °C

IP class IP 64


Directives - standards - certificates

Directives RoHS
CE


Safety standards EN60598-1
EN62031
IEC62471

Measurement results

irradiance - 800-nir (24V)

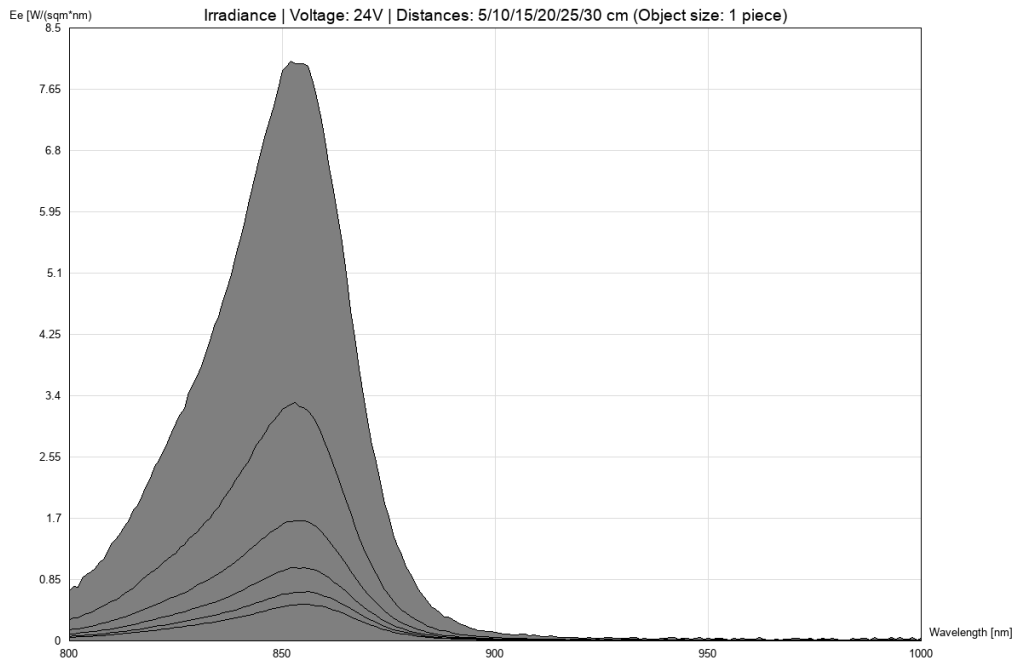

cie1931

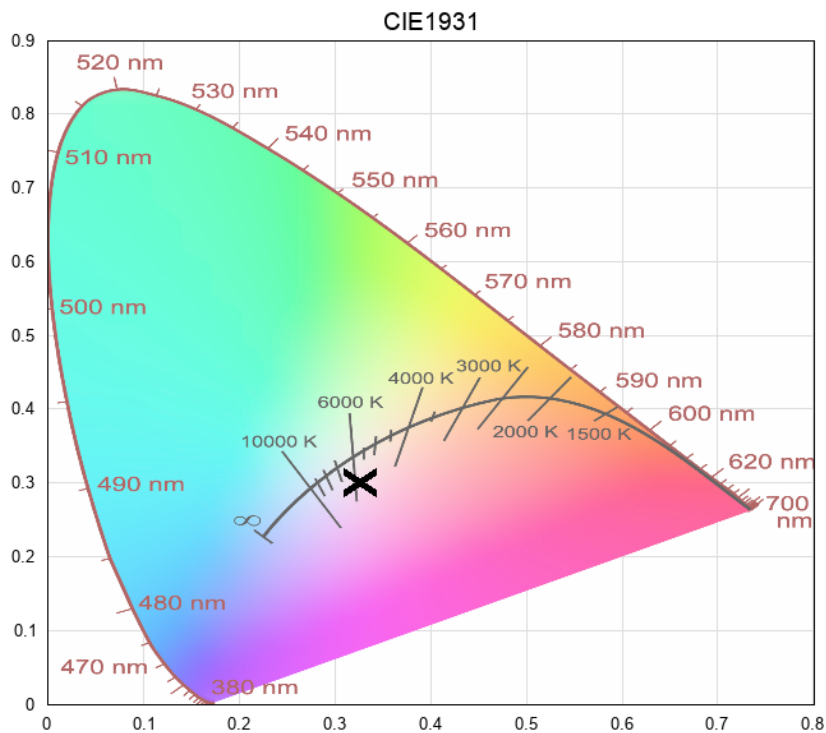

While LuxaLight has made every reasonable effort to ensure the accuracy of the information in this brochure, LuxaLight does not guarantee that it is error - free, nor does LuxaLight make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. LuxaLight reserves the right to make any adjustments to the information contained herein at any time without notice. LuxaLight expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalogue are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult LuxaLight for the latest dimensions and design specifications.