

Datasheet

LuxaLight LED-strip Yellow Protected (24 Volt, 140 LEDs, 2835, IP64)

LS24Y140X2835PLX

Version: 2025-07-09.4

Product description

The **LuxaLight Professional LED strip in yellow (595 nm)** is designed for applications where vibrant, highly visible yellow lighting is essential. With a specific wavelength of 595 nanometers, this LED strip emits a pure, saturated yellow light that enhances visual impact, making it ideal for decorative, commercial, safety, and architectural lighting.

Key Features:

- **595 nm Yellow Wavelength:** Emits a clear, bright yellow light perfect for accent, signal, and feature lighting applications.
- **140 pcs 2835 LEDs per Meter:** Delivers high light density and uniform illumination for consistent brightness along the strip.
- **Flexible Design:** Allows easy integration into various lighting configurations including profiles, fixtures, or custom lighting systems.
- **3 oz/ft² PCB Thickness:** Ensures robust thermal management and mechanical strength, enhancing durability and reliability.
- **Passive Cooling Required:** Should be used with proper heat dissipation to ensure long-term performance.
- **3M 4905 VHB Tape:** Offers strong adhesion to a wide variety of surfaces, simplifying permanent installations.

Applications:

- **Architectural and Accent Lighting:** Perfect for outlining building features or adding colorful highlights to structures and interiors.
- **Retail and Visual Merchandising:** Draws attention to specific products or zones in shops and showrooms.
- **Entertainment and Events:** Ideal for stages, exhibitions, and themed lighting where bold colors enhance the atmosphere.
- **Safety and Warning Lighting:** Yellow is commonly used for cautionary and signal lighting in industrial or public spaces.
- **Signage and Wayfinding:** Enhances visibility and legibility in indoor and outdoor signage systems.

Benefits:

- **Yellow Output (595 nm):** Produces a distinct and eye-catching yellow color for high-visibility applications.
- **Uniform Illumination:** With 140 LEDs per meter, the strip ensures even light distribution without dark spots.
- **Flexible and Customizable:** Easily integrates into a range of lighting designs thanks to its flexible construction.
- **Reliable and Energy-Efficient:** Uses efficient LED technology that delivers stable performance with reduced energy consumption.
- **Easy Installation:** Strong adhesive backing with 3M VHB tape enables fast, reliable mounting on various surfaces.
- **Durable Construction:** Reinforced PCB ensures longevity, especially when used with proper thermal management.

Technical specifications

General	
Brand	LuxaLight
LEDs / meter	140
LED type	2835
Length per reel	10 m
Length per segment	50 mm
LED strip width	10.00 mm
LED strip thickness	4.00 mm
PCB color	White
Mantle material	Silicon
Dimensions	10.000 × 10 × 4 mm
Mounting	3M tape VHB4905
Warranty	5 years
Lifetime	70000 hours
Lighting	
Luminous Flux	1122 lm
Wave length	595 nm
BIN	3 SDCM
Beam angle	120 °
LB waarde	L90B50
Measurement results	
Illuminance (Lux) (Object length: 200 mm)	24V
	5cm 11100 lx
	10cm 4719 lx
	15cm 2436 lx
	20cm 1500 lx
	25cm 1045 lx
	30cm 793.3 lx
Total PPFD umol/m2 (PAR 400-700nm) (Object length: 200 mm)	24V
	5cm 109.375 umol/m2
	10cm 46.3582 umol/m2
	15cm 23.9772 umol/m2
	20cm 14.7993 umol/m2
	25cm 10.2635 umol/m2
	30cm 7.79203 umol/m2
Peak wavelength (Object length: 200 mm)	592 nm
Electronics	
Working voltage	24V

Current / meter	1.00 A / meter	
Power consumption per meter	24.00 W / meter	
PCB material	Copper	
Pinout		
	Symbol	Function
	V+	V+
	GND	Ground

Environmental


Operating temperature	-20 ~ +60 °C
Storage temperature	-40 ~ +80 °C
IP class	IP 64

Directives - standards - certificates


Directives	RoHS CE
Safety standards	EN60598-1 EN62031 IEC62471

Measurement results

irradiance - 530-630-yellow (24V)

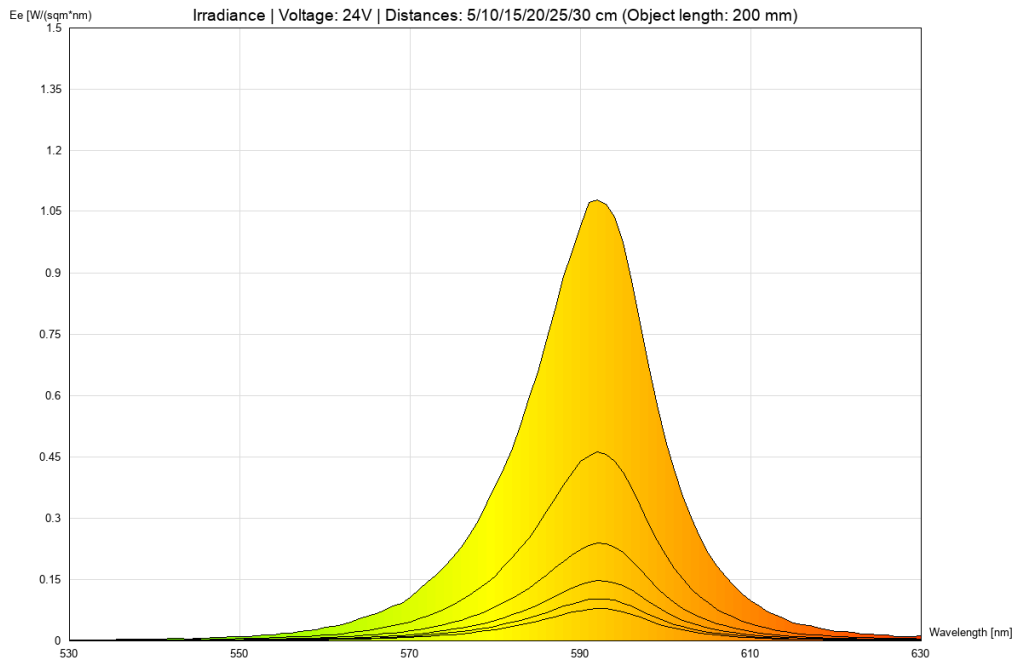

cie1931

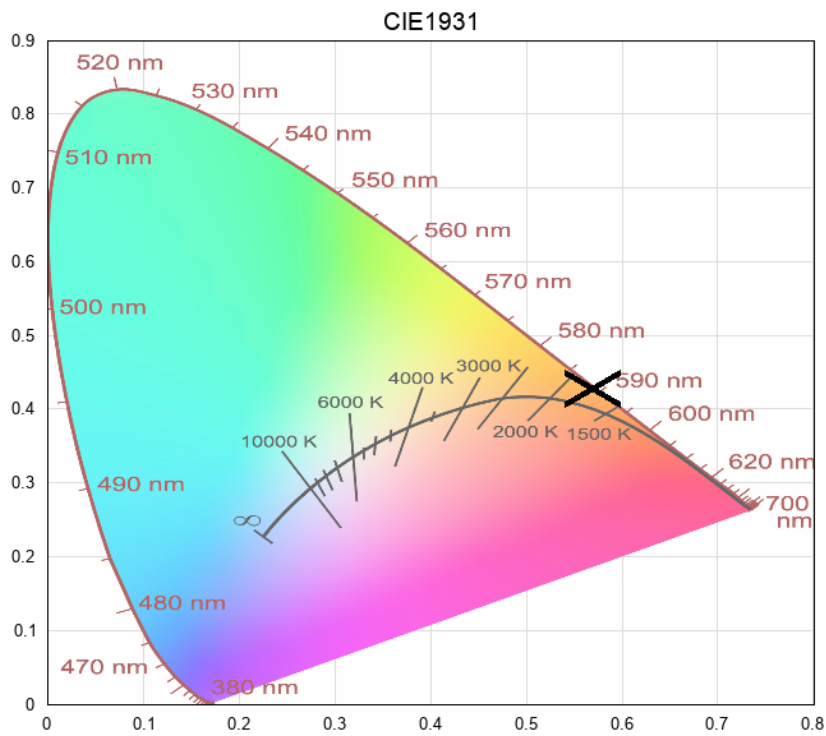

While LuxaLight has made every reasonable effort to ensure the accuracy of the information in this brochure, LuxaLight does not guarantee that it is error - free, nor does LuxaLight make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. LuxaLight reserves the right to make any adjustments to the information contained herein at any time without notice. LuxaLight expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalogue are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult LuxaLight for the latest dimensions and design specifications.