

Datasheet

LuxaLight Industrial LED Fixture Quartz Glass UV-A 365nm 26.6x23.5mm (24 Volt, 2835, IP64)

LF-24-365-24.2X16-QG

Version: 2025-08-02.1

Product description

The **LuxaLight Industrial UV LED Fixture** is designed for intensive industrial applications requiring high radiation intensity for a wide range of processes, including material curing, reactors, disinfection, and more. With a wavelength of 365nm, this LED fixture offers a reliable and efficient solution for curing coatings, resins, and other materials, as well as accelerating chemical reactions in photochemical processes, supporting reactors, and disinfecting surfaces.

The LED fixture is equipped with a silicone coating on the PCB, offering extra protection against moisture, dust, and other environmental factors. The transparent cover is made of quartz glass, ensuring optimal transmission of the 365nm wavelength, allowing the radiation to reach the treated surface effectively.

Key Features:

- **365nm Wavelength:** The 365nm wavelength is ideal for a wide range of industrial applications, including curing resins, coatings, and materials, as well as photochemical processes, reactors, and disinfection.
- **24V Power Supply:** The fixture operates on a reliable 24V power supply, ensuring stable and consistent operation, ideal for demanding industrial applications.
- **Silicone Coating on PCB:** The PCB is coated with silicone to protect against environmental factors like moisture and dust, ensuring durability in harsh industrial environments.
- **Transparent Quartz Glass Cover:** The transparent cover is made of quartz glass, which optimally transmits the 365nm wavelength, ensuring efficient radiation transfer to the treated surface.
- **Integration with MaNima Pollux Industry Pulsing (Strobing):** The LED fixture supports integration with the MaNima Pollux Industry System for pulsing (strobing), significantly increasing radiation intensity. This feature allows for faster reactions and enhanced efficiency in industrial processes.
- **Real-Time Temperature Monitoring via NTC Sensor:** The integrated NTC sensor ensures continuous temperature measurement and adjustment through the MaNima Pollux Industry System. This maintains the optimal operating temperature for maximum radiation output and consistent performance.

Applications:

- **UV Curing of Coatings:** Ideal for curing coatings in the printing industry, such as in the paint industry, where rapid curing is essential for productivity.
- **Reactors and Chemical Processes:** Perfect for accelerating photochemical reactions, such as in reactors for resin or other material production that rely on UV light.
- **Disinfection:** The 365nm wavelength can be used for disinfecting surfaces, particularly in controlled industrial environments such as laboratories and cleanrooms.
- **3D Printing:** Suitable for accelerating the curing of 3D printed objects, especially for resins that require specific 365nm wavelength for full curing.
- **Packaging Industry:** The LED fixture is ideal for curing packaging materials, such as in the food or pharmaceutical industry, ensuring rapid curing of printed materials.
- **Automotive Industry:** The fixture can be used for curing coating materials in automotive spray booths and other applications that require high radiation intensity.

Benefits:

- **High Radiation Intensity:** The ability to pulse with the MaNima Pollux Industry System allows radiation intensity to be significantly increased, resulting in faster reactions and increased productivity.
- **Real-Time Temperature Monitoring for Consistent Performance:** The NTC sensor, combined with the MaNima Pollux Industry System, ensures continuous temperature measurement, helping to maintain the optimal operating temperature and preventing overheating, which prolongs the LED's lifespan and improves efficiency.
- **Industrial Durability:** The silicone coating on the PCB provides extra protection against dust, moisture, and other environmental factors, making the fixture resistant to the challenges of heavy industrial environments.
- **Efficiency and Speed:** The LED fixture provides sufficient power for fast and efficient performance, which is essential for industrial production systems that need to process or cure large amounts of material quickly.

Technical specifications

General

Brand	LuxaLight
Application	Curing & Aging Machine Vision UV Inspection
LED type	2835
Material	Aluminum
Dimensions	220 × 266 × 235 mm
Mounting	Surface mounted
Cover type	Quartz glass
LEDs per piece	108.00

Lighting

Wave length UV	365 nm
Beam angle	120 °

Measurement results

Peak wavelength (Object size: 1 piece)	369 nm	
Peak irradiance (Object size: 1 piece)		24V
	5cm	26.573 W/sqm
	10cm	11.9593 W/sqm
	15cm	6.17532 W/sqm
	20cm	3.79817 W/sqm
	25cm	2.48874 W/sqm
	30cm	1.84494 W/sqm
Total irradiance (Object size: 1 piece)		24V
	5cm	353.6 W/sqm
	10cm	158.1 W/sqm
	15cm	83.74 W/sqm
	20cm	51.78 W/sqm
	25cm	33.83 W/sqm
	30cm	24.68 W/sqm

- By combining Pulse Mode with Real-Time Monitoring, the efficiency of LED systems can be increased, resulting in higher output.
- We have the expertise and equipment to perform measurements tailored to the specific requirements of the application.

Additional benefits of the Luxalight Industrial LED Fixture

LED Fixture benefits	• Multiple wavelengths in one housing • No optics required due to high output • Customizable cable output and / or connector • Wide range of mounting options • In-house expertise to personally advice on LED fixture customization
----------------------	--


Electronics

Working voltage	24V
-----------------	-----


Current per piece	1.25 A / piece										
Power consumption per piece	30.00 W / piece										
PCB material	Aluminium										
Pinout	<table> <tr> <th>Symbol</th><th>Function</th></tr> <tr> <td>V+</td><td>V+</td></tr> <tr> <td>GND</td><td>Ground</td></tr> <tr> <td>NTC</td><td>NTC sensor</td></tr> <tr> <td>NTC_GND</td><td>NTC ground</td></tr> </table>	Symbol	Function	V+	V+	GND	Ground	NTC	NTC sensor	NTC_GND	NTC ground
Symbol	Function										
V+	V+										
GND	Ground										
NTC	NTC sensor										
NTC_GND	NTC ground										
NTC parameters	Resistance: 5000 Ohm Beta value: 3950										
Environmental											
Operating temperature	-20 ~ +60 °C										
Storage temperature	-40 ~ +80 °C										
IP class	IP 64										
Directives - standards - certificates											
Directives	RoHS CE										
Safety standards	EN60598-1 EN62031 IEC62471										

Measurement results

irradiance - 315-405-uv-a (24V)

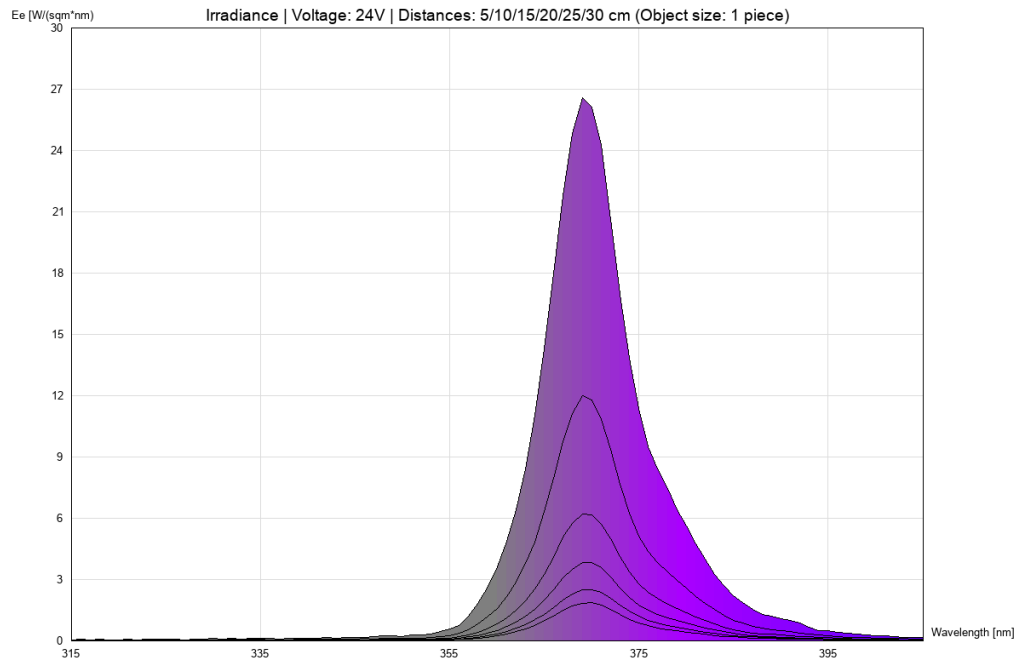

cie1931

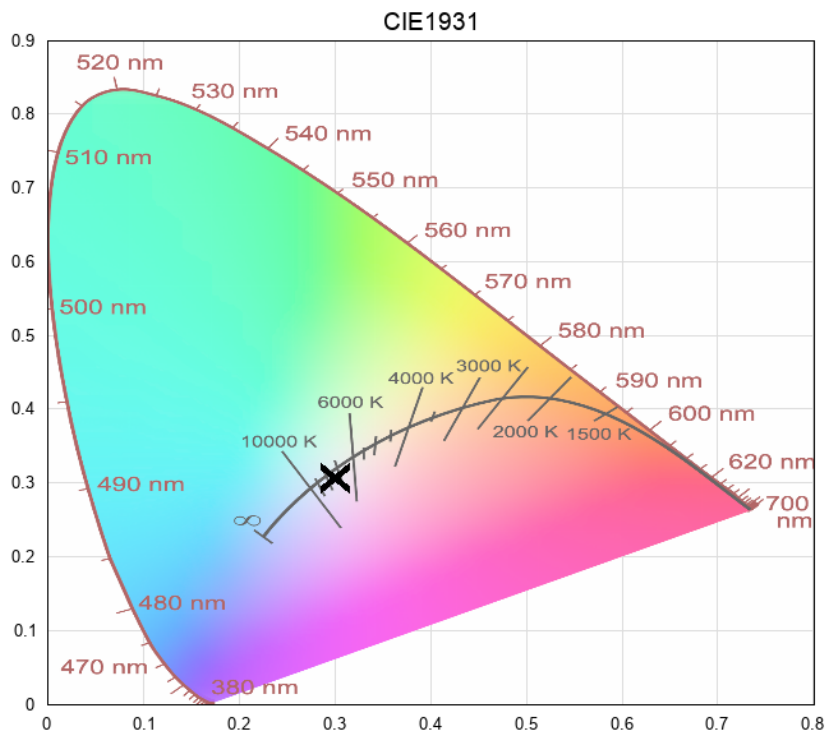

While LuxaLight has made every reasonable effort to ensure the accuracy of the information in this brochure, LuxaLight does not guarantee that it is error - free, nor does LuxaLight make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. LuxaLight reserves the right to make any adjustments to the information contained herein at any time without notice. LuxaLight expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalogue are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult LuxaLight for the latest dimensions and design specifications.