

Datasheet

LuxaLight Industrial LED Fixture Polarised cover Far Red 735nm 24.2x16mm (24 Volt, 2835, IP64)

LF-24-735-24.2X16-POL

Version: 2025-08-27.2

Product description

The LuxaLight Industrial LED Fixture is designed for intensive industrial applications that require high radiation intensity for a wide range of processes, such as material curing, biological research, and more. With a **735nm** deep red wavelength, this LED fixture provides a reliable and efficient solution for processes that benefit from deep red light, such as plant growth stimulation, tissue regeneration, and more.

The LED fixture is made of durable aluminum, ensuring efficient heat dissipation and long-term performance. It is equipped with a **polarized cover** available in four different angles (30°, 60°, 90°, and 120°), offering flexibility to adjust the light distribution according to the specific needs of each application. Additionally, the fixture is coated with silicone on the PCB, providing extra protection against moisture, dust, and other environmental factors.

Key Features:

- **735nm Deep Red Wavelength:** The 735nm wavelength is ideal for applications requiring deep red light, such as horticulture, biological research, and specific industrial processes. It helps promote plant growth, tissue regeneration, and therapeutic applications.
- **Aluminum Fixture:** The durable aluminum housing ensures excellent heat dissipation, contributing to the long-term efficiency and stability of the LED fixture.
- **Polarized Cover with Adjustable Angles:** The LED fixture comes with a polarized cover available in four different angles (30°, 60°, 90°, and 120°), allowing for customized light distribution. This ensures the fixture meets the unique requirements of various applications.
- **Silicone Coating on PCB:** The PCB is coated with silicone to provide protection against environmental factors such as moisture and dust, ensuring durability in harsh industrial environments.
- **Integration with MaNima Pollux Industry Pulsing (Strobing):** The LED fixture supports integration with the MaNima Pollux Industry System for pulsing (strobing), significantly increasing radiation intensity. This feature enables faster reactions and improved efficiency in industrial processes.
- **Real-Time Temperature Monitoring via NTC Sensor:** The integrated NTC sensor provides continuous temperature measurement and adjustment through the MaNima Pollux Industry System. This helps maintain the optimal operating temperature for maximum radiation output and consistent performance.

Applications:

- **Horticulture & Agriculture:** The **735nm** wavelength is highly effective in promoting plant growth, especially in encouraging blooming and fruiting. This makes it ideal for use in greenhouses and other agricultural applications where plant health and growth are critical.
- **Biological Research:** In scientific and medical applications, **735nm** light can be used for processes such as promoting tissue regeneration, cell cultivation, and photobiomodulation therapy (PBM), which can aid in pain relief and wound healing.
- **Medical Therapy:** **735nm** deep red light is used in phototherapy treatments for skin healing, anti-aging treatments, and muscle recovery, stimulating cells and tissues with the benefits of red light.
- **Food Industry:** The **735nm** wavelength can be used for applications such as stimulating growth in food production environments or in the pasteurization process of certain foods.
- **Industrial Material Curing (Non-UV):** The deep red light is used for curing coatings and materials that react to red wavelengths, ensuring effective and rapid curing processes in industrial settings.

Benefits:

- **High Radiation Intensity:** The ability to pulse with the MaNima Pollux Industry System allows for a significant increase in radiation intensity, resulting in faster reactions and higher productivity.
- **Real-Time Temperature Monitoring for Consistent Performance:** The NTC sensor, combined with the MaNima Pollux Industry System, ensures continuous temperature monitoring, helping to maintain optimal operating conditions and prevent overheating. This extends the lifespan of the LED and enhances efficiency.
- **Customizable Light Distribution:** The polarized cover, available in angles of 30°, 60°, 90°, and 120°, allows for customized light distribution, making it versatile for different industrial, research, and medical applications.
- **Industrial Durability:** The aluminum housing provides durability and excellent heat dissipation, while the silicone coating on the PCB protects against environmental factors like dust and moisture, making the fixture ideal for harsh industrial environments.

Technical specifications

General		
Brand	LuxaLight	
Application	Barcode Scanning Machine Vision	
LED type	2835	
Material	Aluminum	
Dimensions	220 × 24,2 × 16 mm	
Mounting	Surface mounted	
Cover type	PMMA Polarised transparent	
LEDs per piece	108.00	
Lighting		
Wave length	735nm	
Beam angle	120 °	
Measurement results		
Illuminance (Lux) (Object size: 1 piece)		24V
	5cm	440.06 lx
	10cm	155.17 lx
	15cm	72.77 lx
	20cm	48.54 lx
	25cm	28.87 lx
	30cm	20.07 lx
Total PPFD umol/m2 (PAR 400-700nm) (Object size: 1 piece)		24V
	5cm	52.98 umol/m2
	10cm	20.33 umol/m2
	15cm	10.4 umol/m2
	20cm	6.49 umol/m2
	25cm	4.36 umol/m2
	30cm	3.22 umol/m2
Peak wavelength (Object size: 1 piece)	739 nm	
Peak irradiance (Object size: 1 piece)		24V
	5cm	4.65 W/sqm
	10cm	1.78 W/sqm
	15cm	0.92 W/sqm
	20cm	0.57 W/sqm
	25cm	0.38 W/sqm
	30cm	0.29 W/sqm

Total irradiance
(Object size: 1 piece)

	24V
5cm	228.97 W/sqm
10cm	87.84 W/sqm
15cm	45.46 W/sqm
20cm	28.09 W/sqm
25cm	18.96 W/sqm
30cm	14.11 W/sqm

- By combining Pulse Mode with Real-Time Monitoring, the efficiency of LED systems can be increased, resulting in higher output.
- We have the expertise and equipment to perform measurements tailored to the specific requirements of the application.

Electronics

Working voltage	24V
Current per piece	1.25 A / piece
Power consumption per piece	30.00 W / piece
PCB material	Aluminium

Pinout

Symbol	Function
V+	V+
GND	Ground
NTC	NTC sensor
NTC_GND	NTC ground

NTC parameters	Resistance: 5000 Ohm Beta value: 3950
----------------	--

Environmental


Operating temperature	-20 ~ +60 °C
Storage temperature	-40 ~ +80 °C
IP class	IP 64

Directives - standards - certificates


Directives	RoHS CE
Safety standards	EN60598-1 EN62031 IEC62471

Measurement results

irradiance - 700-800-deep-far-red (24V)

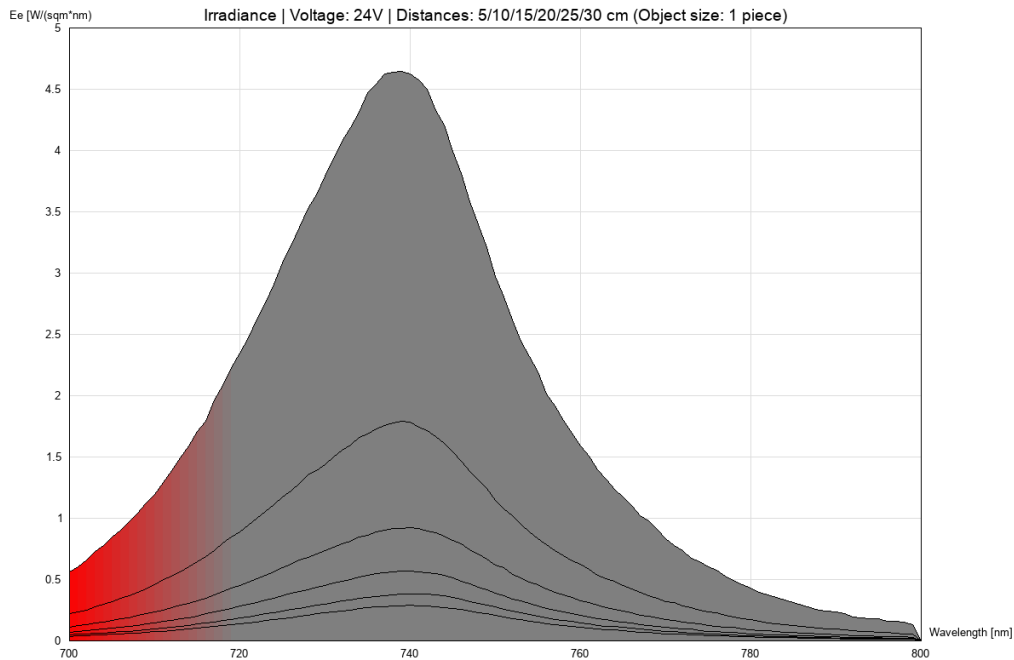

cie1931

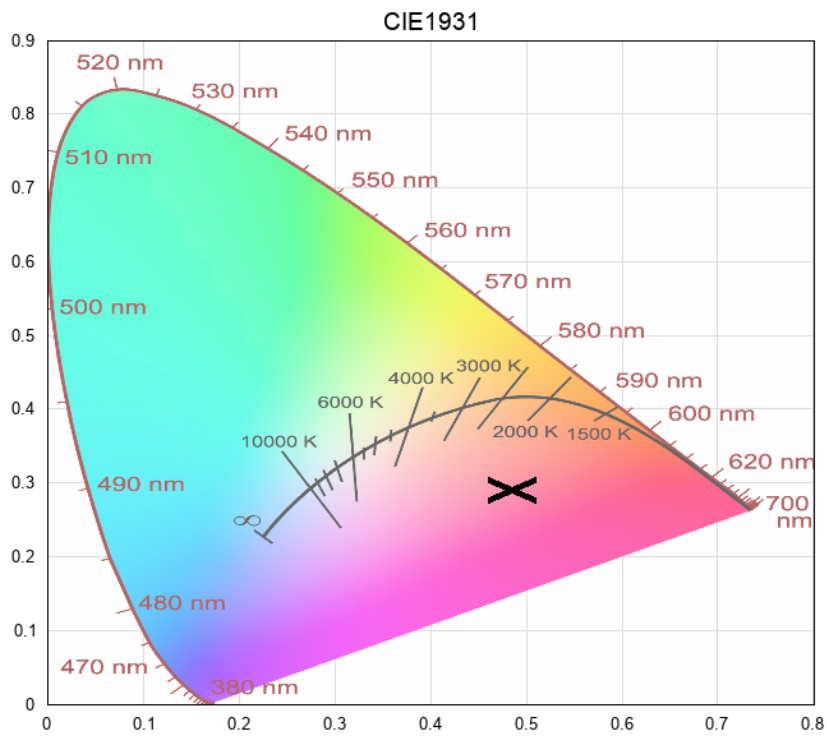

While LuxaLight has made every reasonable effort to ensure the accuracy of the information in this brochure, LuxaLight does not guarantee that it is error - free, nor does LuxaLight make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. LuxaLight reserves the right to make any adjustments to the information contained herein at any time without notice. LuxaLight expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalogue are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult LuxaLight for the latest dimensions and design specifications.