

Datasheet

LuxaLight Industrial LED Fixture Transparent cover Far Red 735nm 24.2x16mm (24 Volt, 2835, IP64)

LF-24-735-24.2X16-TC

Version: 2026-04-10.2

Product description

The **LuxaLight Industrial LED Fixture Transparent Cover Far Red 735nm (24.2 × 16mm)** is engineered for industrial uses demanding robust, precise, high-intensity deep-red light. Its **modular design** (scalable from 220 mm to 3000 mm), transparent cover optimized for far-red transmission, and seamless integration with the **MaNima Pollux Industrial System** deliver versatility for horticulture, biological research, phototherapy, and non-UV material curing.

Specifications

Property	Value / Description
Wavelength	735 nm (far red, measured peak 739 nm)
Optical Output	High radiant intensity, optimized for far-red industrial applications
Cover	Transparent cover allowing efficient 735 nm transmission
PCB Protection	Industrial-grade silicone coating (dust, moisture, chemical resistance)
Thermal Monitoring	Integrated NTC sensor, controllable via MaNima Pollux Industrial System
Pulsing/Strobing	Supported when integrated with MaNima Pollux Industrial System
Design	Modular and scalable, adaptable from 220 mm up to 3000 mm
Dimensions	24.2 × 16 mm (fixture profile)
Environment	Designed for harsh industrial conditions (dust, vibration, moisture)

Applications

- **Horticulture & flowering stimulation** – far-red promotes flowering, fruiting, and morphological responses
- **Photobiomodulation & biological research** – deep tissue stimulation, plant photoperiod control, PBM studies
- **Medical & cosmetic therapy** – wound healing, skin regeneration, anti-aging treatments
- **Material curing (non-UV)** – curing red-sensitive materials and coatings
- **Machine vision & inspection** – used for contrasting imaging and optical scanning

Also applicable in specialized R&D lighting setups.

Benefits for Engineers

- **Process efficiency:** pulsating + monitoring optimizes output without overheating
- **Reliable performance:** thermal feedback safeguards LED lifespan
- **Industrial robustness:** durable against dust, moisture, mechanical stress
- **Modular scalability:** flexible length and layouts for diverse systems
- **Plug-and-play integration:** ready for MaNima Pollux workflows and industrial automation

Integration with MaNima Pollux Industrial System

- Real-time NTC sensor control and feedback
- Pulsing/strobing capabilities for enhanced peak intensity
- Thermal protection to avoid overheating
- Compatible with PLC/SCADA systems for process control
- **Open API (UDP-based)** for custom integration

Technical specifications

General		
Brand	LuxaLight	
Application	Barcode Scanning Machine Vision	
LED type	2835	
Material	Aluminum	
Dimensions	220 × 24,2 × 16 mm	
Mounting	Surface mounted	
Cover type	PMMA transparent	
LEDs per piece	108.00	
Lifetime	70000 hours	
Lighting		
Light color	700 ~ 750nm Far Red	
Beam angle	120 °	
Measurement results		
Peak wavelength (Object size: 1 piece)	739 nm	
Peak irradiance (Object size: 1 piece)	24V	
	5cm	9.29 W/sqm
	10cm	3.57 W/sqm
	15cm	1.84 W/sqm
	20cm	1.13 W/sqm
	25cm	0.76 W/sqm
	30cm	0.57 W/sqm
Total irradiance (Object size: 1 piece)	24V	
	5cm	416.3 W/sqm
	10cm	159.7 W/sqm
	15cm	82.65 W/sqm
	20cm	51.08 W/sqm
	25cm	34.48 W/sqm
	30cm	25.66 W/sqm
<ul style="list-style-type: none"> • By combining Pulse Mode with Real-Time Monitoring, the efficiency of LED systems can be increased, resulting in higher output. • We have the expertise and equipment to perform measurements tailored to the specific requirements of the application. 		
Electronics		
Working voltage	24V	
Current per piece	1.25 A / piece	
Power consumption per piece	30.00 W / piece	
PCB material	Aluminium	

Pinout

Symbol	Function
V+	V+
GND	Ground
NTC	NTC sensor
NTC_GND	NTC ground

NTC parameters	Resistance: 5000 Ohm Beta value: 3950
-----------------------	------------------------------------------

Environmental

Operating temperature	-20 ~ +60 °C
------------------------------	--------------

Storage temperature	-40 ~ +80 °C
----------------------------	--------------

IP class	IP 64
-----------------	-------


Directives - standards - certificates

Directives	RoHS CE
-------------------	------------


Safety standards	EN60598-1 EN62031 IEC62471
-------------------------	----------------------------------

Measurement results

irradiance - 700-800-deep-far-red (24V)

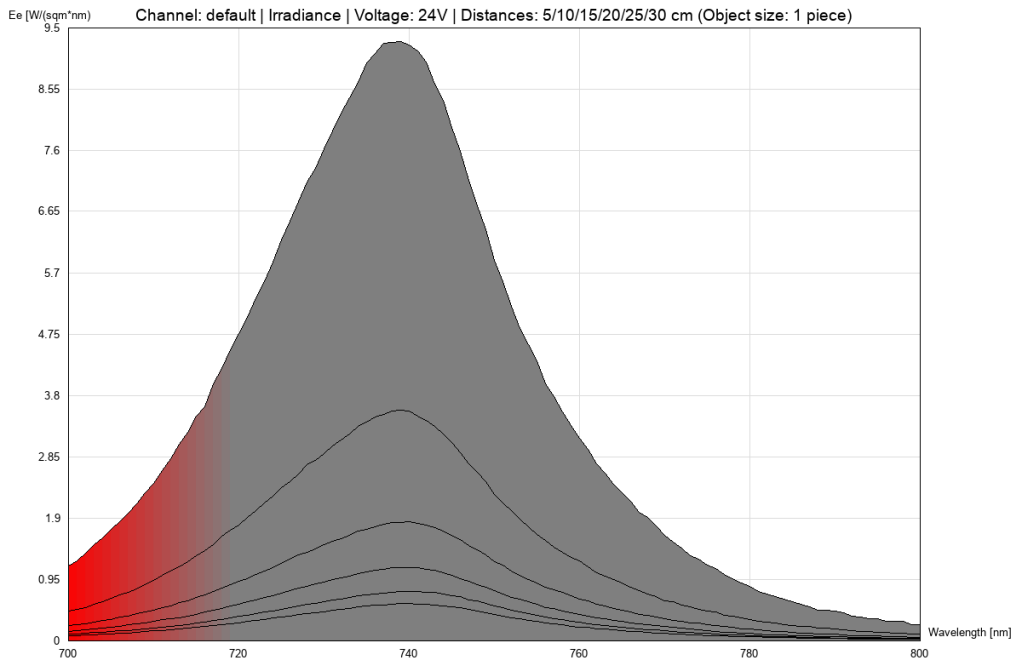

cie1931

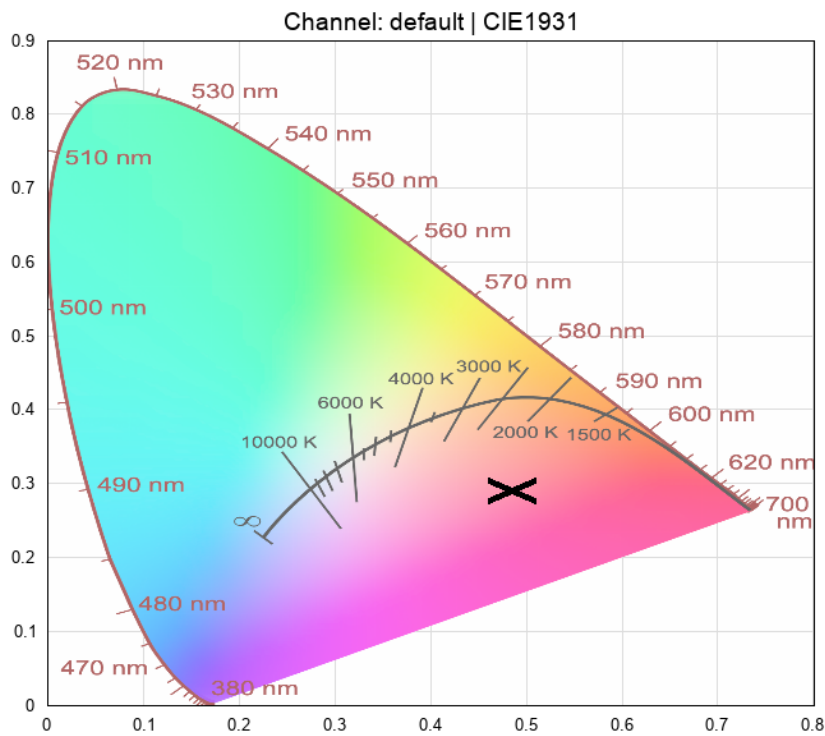

While LuxaLight has made every reasonable effort to ensure the accuracy of the information in this brochure, LuxaLight does not guarantee that it is error - free, nor does LuxaLight make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. LuxaLight reserves the right to make any adjustments to the information contained herein at any time without notice. LuxaLight expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalogue are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult LuxaLight for the latest dimensions and design specifications.