

Datasheet

LED Strip Specification

LED strip type:
LS12SHAPEW60X2835ILX

Description:
**LuxaLight Long Life Shape Shape LED Strip White 12V Indoor
(12 Volt, 60 LEDs, 2835, IP20)**



Date:
06-10-2017

Page 1 of 4

Parameters:

Basic Parameters	
LED Type	2835 SMD
Color	White
CRI	≥ 90 Ra
Viewing Angle (θ)	120 ±5°
LED Qty	60 LEDs / mtr
IP grade	IP20
Dimensions	1000 * 6 * 3mm
Weight	30g ~ 35g / meter
Lifespan	70,000 hours
LB Value	L80B50

Environment Parameters	
Working Temperature	-25°C ~ +70°C
Storage Temperature	-20°C ~ +60°C


Electronic Specifications	
Working Voltage	DC12V
Working Current	0.4 A / mtr
Working Wattage	4.8 W / mtr
Driving Method	Constant Voltage

Wires & connection length	
Wires	UL1007 20# 150mm
Length per segment	50mm
LEDs / segment	3
Standard length on a reel	10m


Luminous Flux (Lumen/Meter)	
White	≈ 600 Lumen

Wave Length/ Color Temperature (nm/k)	
White	6300 ~ 6500 K


CIE1931:

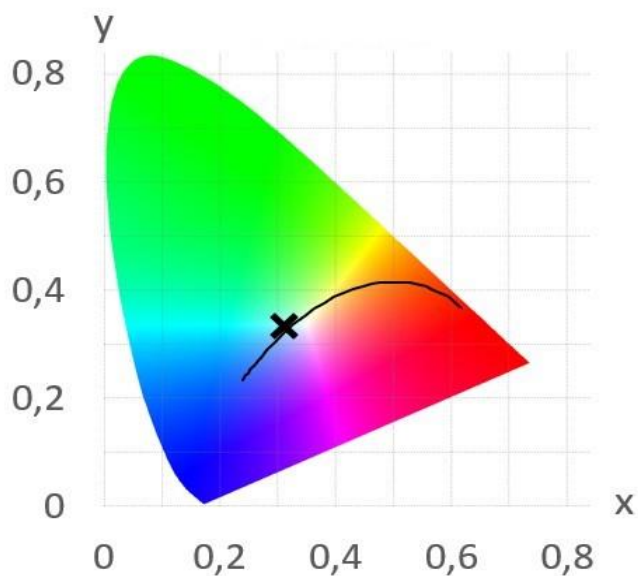

Optical Characteristics Curve:

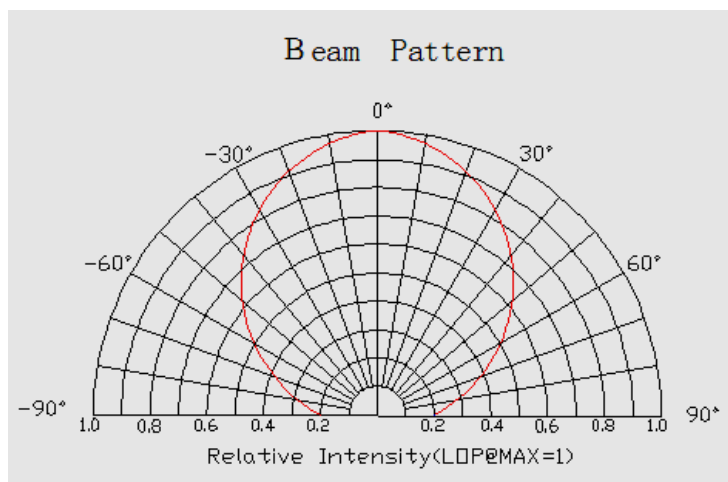

Wave Length

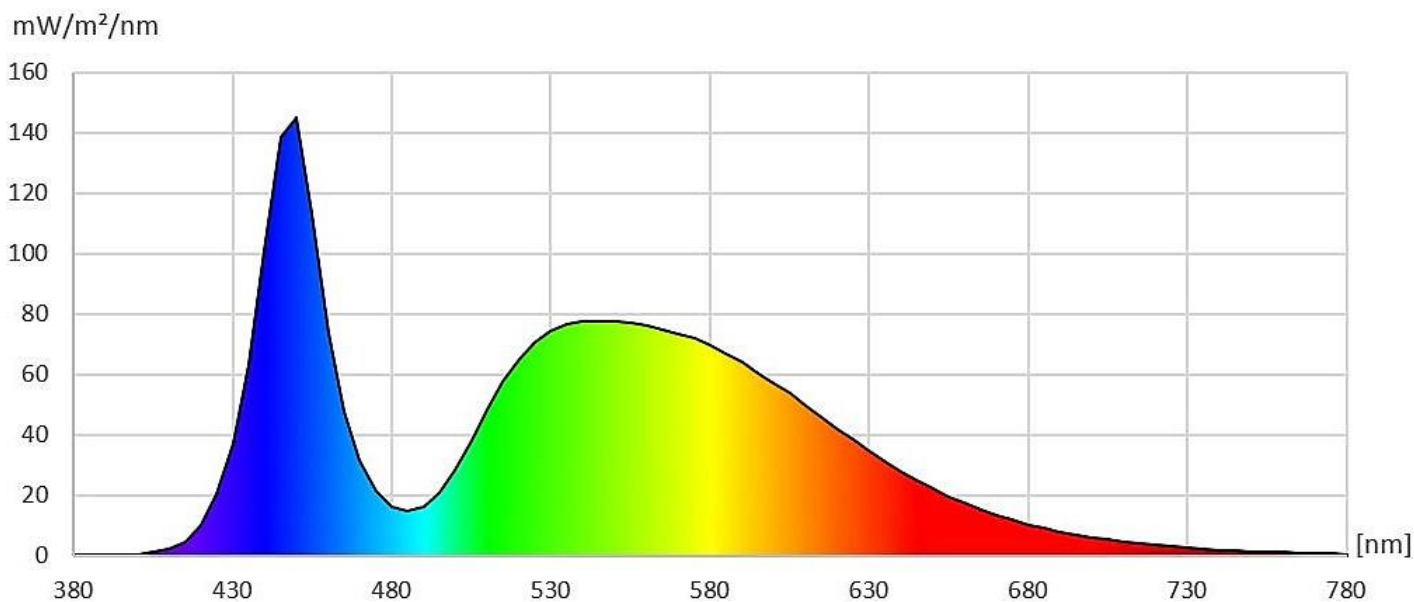

The Materials of PCB:

Epoxy PCB with white finishing.
Conducting Tracks: Cu, 35um thickness, double sided.

Solderings:
Solder Alloy: 99.3 Sn, 0.7 Cu,
Melting Temperature: 227°C
No SVHC (17-Dec-2014)

Certificate of Conformity:

EC Council Directive 2004/108/EC
Electromagnetic Compatibility
Registration No.: ATE20120944

Complies to the Standards:

- EN 55015: 2006 + A1: 2007 + A2: 2009
- EN 61000-3-2: 2006 + A1: 2009 + A2: 2009
- EN 61000-3-3: 2008
- EN 61547: 2009

While LuxaLight has made every reasonable effort to ensure the accuracy of the information in this brochure, TE does not guarantee that it is error-free, nor does LuxaLight make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. LuxaLight reserves the right to make any adjustments to the information contained herein at any time without notice. LuxaLight expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalog are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult LuxaLight for the latest dimensions and design specifications.