

# Datasheet

LED Strip Specification

LED strip type:  
**WS2812B**

Description:  
**WS2812B Digital Full-Color 5050 LED**



Date:  
11-7-2015

Page 1 of 9

## Features and benefits

- Intelligent reverse connect protection, the power supply reverse connection does not damage the IC.
- The control circuit and the LED share the only power source.
- Control circuit and RGB chip are integrated in a package of 5050 components, form a complete control of pixel point.
- Built-in signal reshaping circuit, after wave reshaping to the next driver, ensure wave-form distortion not accumulate.
- Built-in electric reset circuit and power lost reset circuit.
- Each pixel of the three primary color can achieve 256 brightness display, completed 16777216 color full color display, and scan frequency not less than 400Hz/s.
- Cascading port transmission signal by single line.
- Any two point the distance more than 5m transmission signal without any increase circuit.
- When the refresh rate is 30 fps, cascade number are not less than 1024 points.
- Send data at speeds of 800 kbps.
- The color of the light were highly consistent, cost-effective.

## Applications

- Full-color module, Full color soft lights a lamp strip.
- LED decorative lighting, Indoor/outdoor LED video irregular screen.


## General description

WS2812B is a intelligent control LED light source that the control circuit and RGB chip are integrated in a package of 5050 components. It internal include intelligent digital port data latch and signal reshaping amplification drive circuit. Also include a precision internal oscillator and a 12V voltage programmable constant current control part, effectively ensuring the pixel point light color height consistent.


The data transfer protocol use single NZR communication mode. After the pixel power-on reset, the DIN port receive data from controller, the first pixel collect initial 24bit data then sent to the internal data latch, the other data which reshaping by the internal signal reshaping amplification circuit sent to the next cascade pixel through the DOOUT port. After transmission for each pixel, the signal to reduce 24bit. pixel adopt auto reshaping transmit technology, making the pixel cascade number is not limited the signal transmission, only depend on the speed of signal transmission.

LED with low driving voltage, environmental protection and energy saving, high brightness, scattering angle is large, good consistency, low power, long life and other advantages. The control chip integrated in LED above becoming more simple circuit, small volume, convenient installation.


## Photo

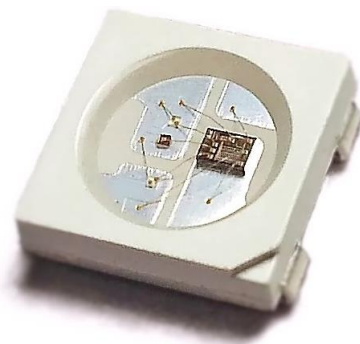


## Mechanical dimensions



Top View




Back View

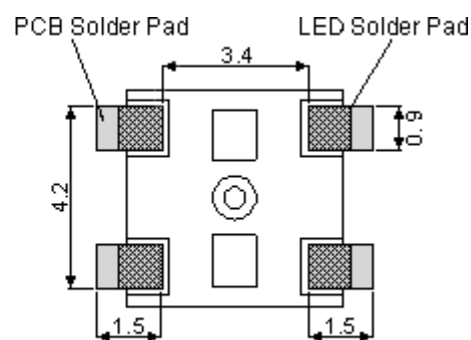

Solder Pad

Unit = mm

## Pin configuration

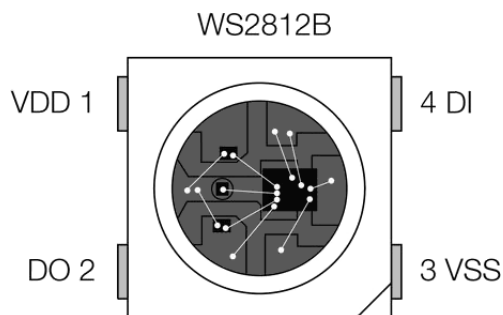

## Pin function

| Pin number | Symbol | Function description       |
|------------|--------|----------------------------|
| 1          | VDD    | Power supply LED           |
| 2          | DO     | Control data signal output |
| 3          | VSS    | Ground                     |
| 4          | DI     | Control data signal input  |

## Absolute maximum ratings

| Parameter                      | Symbol | Ratings        | Units |
|--------------------------------|--------|----------------|-------|
| Power supply voltage           | VDD    | +3.5 to +5.3   | V     |
| Logical input voltage          | VI     | -0.5 VDD +0.5V | V     |
| Operating junction temperature | Topt   | -25 to +70     | °C    |
| Storage temperature            | Tstg   | -40 to +105    | °C    |

## Electrical Characteristics

(TA=-20°C to +70°C, VDD=4.5V to 5.5V, VSS=0V, unless otherwise specified)

| Parameter           | Symbol | Conditions | Min | Typical | Max | Unit |
|---------------------|--------|------------|-----|---------|-----|------|
| Input current       | II     | VI=VDD/VSS |     |         | ±1  | µA   |
| Input voltage level | VIH    | DI, SET    | 0.7 |         |     | VDD  |
|                     | VIL    | DI, SET    |     | 0.3     |     | VDD  |
| Hysteresis voltage  | VH     | DI, SET    |     | 0.35    |     | V    |

## Switching characteristics

(TA=-20°C to +70°C, VDD=4.5V to 5.5V, VSS=0V, unless otherwise specified)

| Parameter               | Symbol | Conditions                    | Min | Typical | Max | Unit |
|-------------------------|--------|-------------------------------|-----|---------|-----|------|
| Transmission delay time | tPLZ   | CL=15pF,<br>DI to DO, RL=10KΩ |     |         | 300 | µs   |
| Fall time               | tTHZ   | CL=300pF,<br>OUTR/OUTG/OUTB   |     |         | 120 | µs   |
| Input capacity          | CI     |                               |     |         | 15  | pF   |

## RGB IC characteristic parameter


| Emitting color | Model   | Wavelength (nm) | Luminous intensity (mcd) | Voltage (V) |
|----------------|---------|-----------------|--------------------------|-------------|
| Red            | 13CBAUP | 620 to 630      | 200                      | 2.0 to 2.2  |
| Green          | 13CGAUP | 510 to 525      | 290                      | 3.0 to 3.4  |
| Blue           | 10R1MUX | 455 to 470      | 185                      | 3.0 to 3.4  |

## Data transfer time


(TH+TL=1.25µs ±600ns)

| Parameter | Conditions                | Time       | Tolerance |
|-----------|---------------------------|------------|-----------|
| T0H       | 0 code, high voltage time | 0.4µs      | ±150ns    |
| T1H       | 1 code, high voltage time | 0.8µs      | ±150ns    |
| T0L       | 0 code, low voltage time  | 0.85µs     | ±150ns    |
| T1L       | 1 code, low voltage time  | 0.45µs     | ±150ns    |
| RES       | low voltage time          | Above 50µs |           |


**CIE1931 RED:**

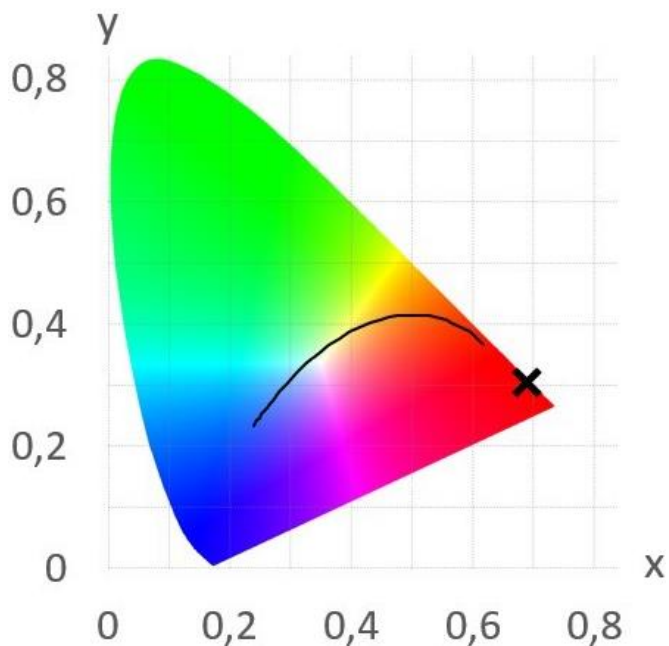


**CIE1931 Green:**

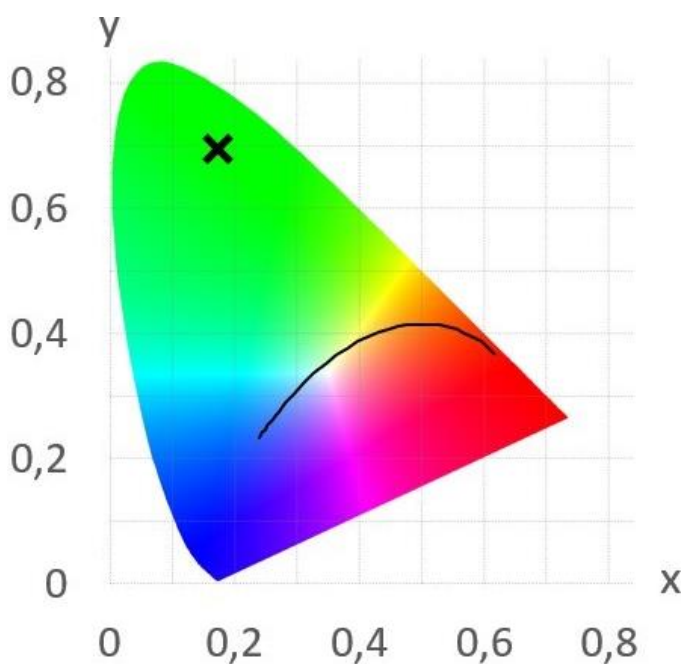


**CIE1931 Blue:**

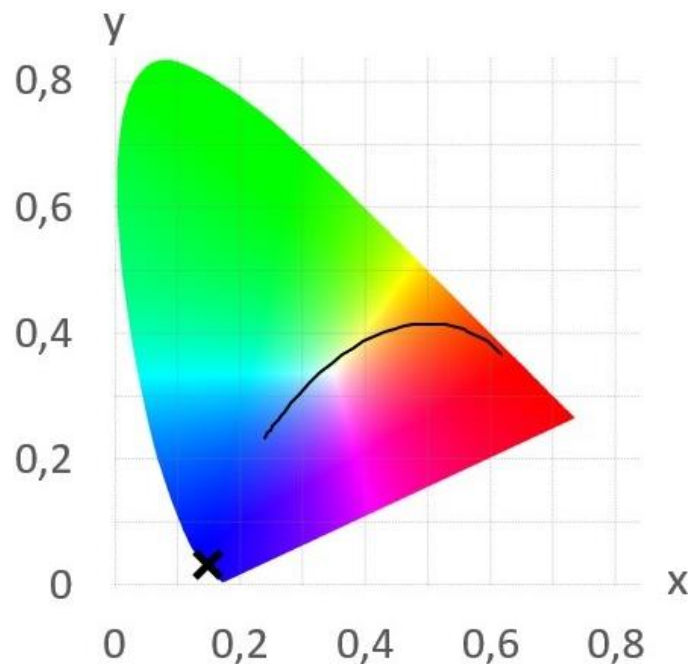


## Wave Length Red:

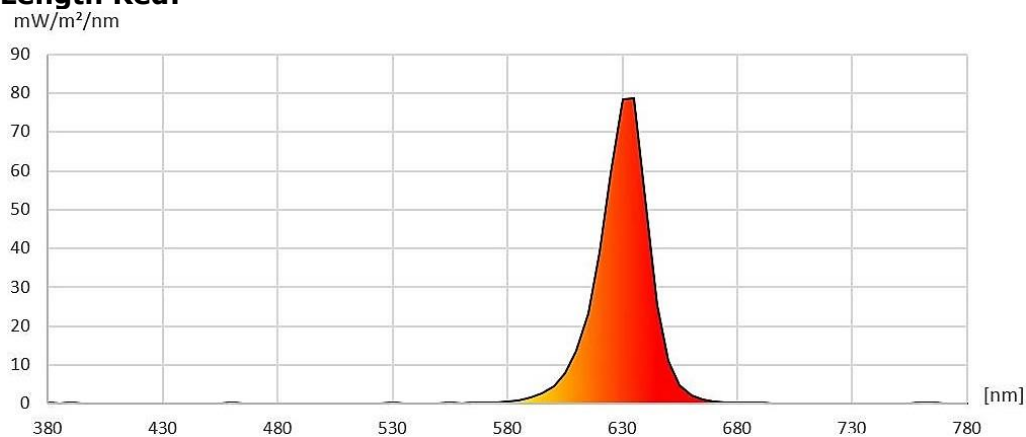


## Wave Length Green:

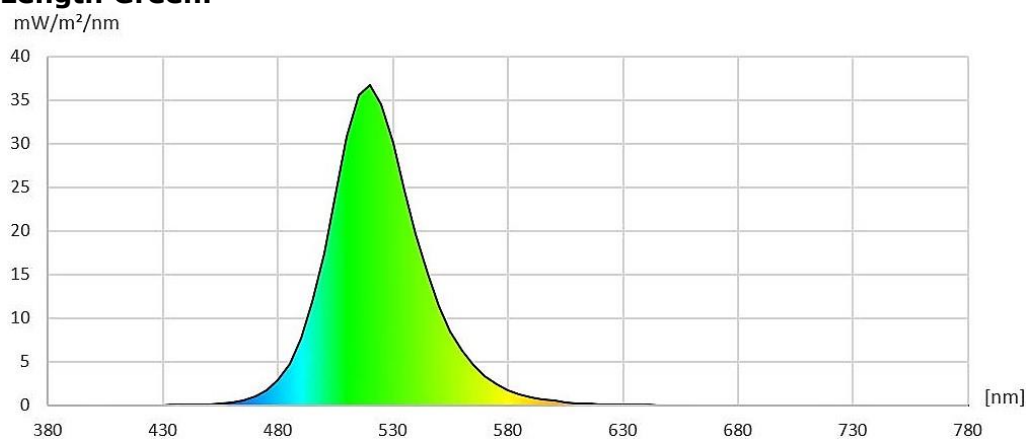


## Wave Length Blue:

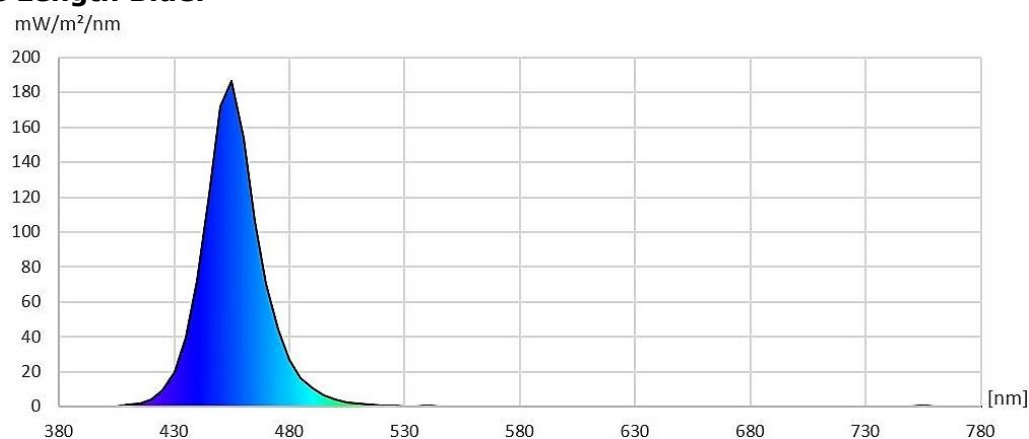


## Sequence chart

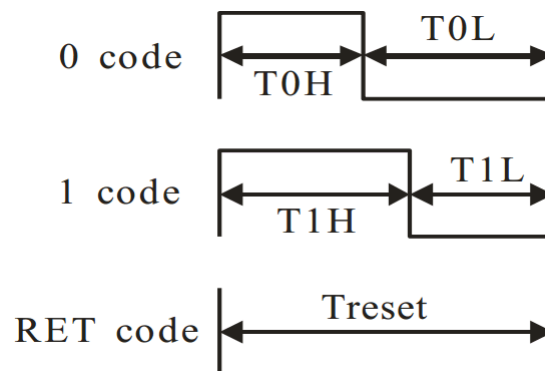

## Cascade method

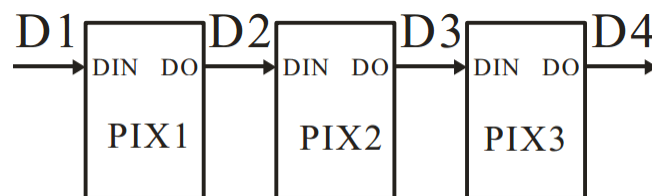

## Data transmission method

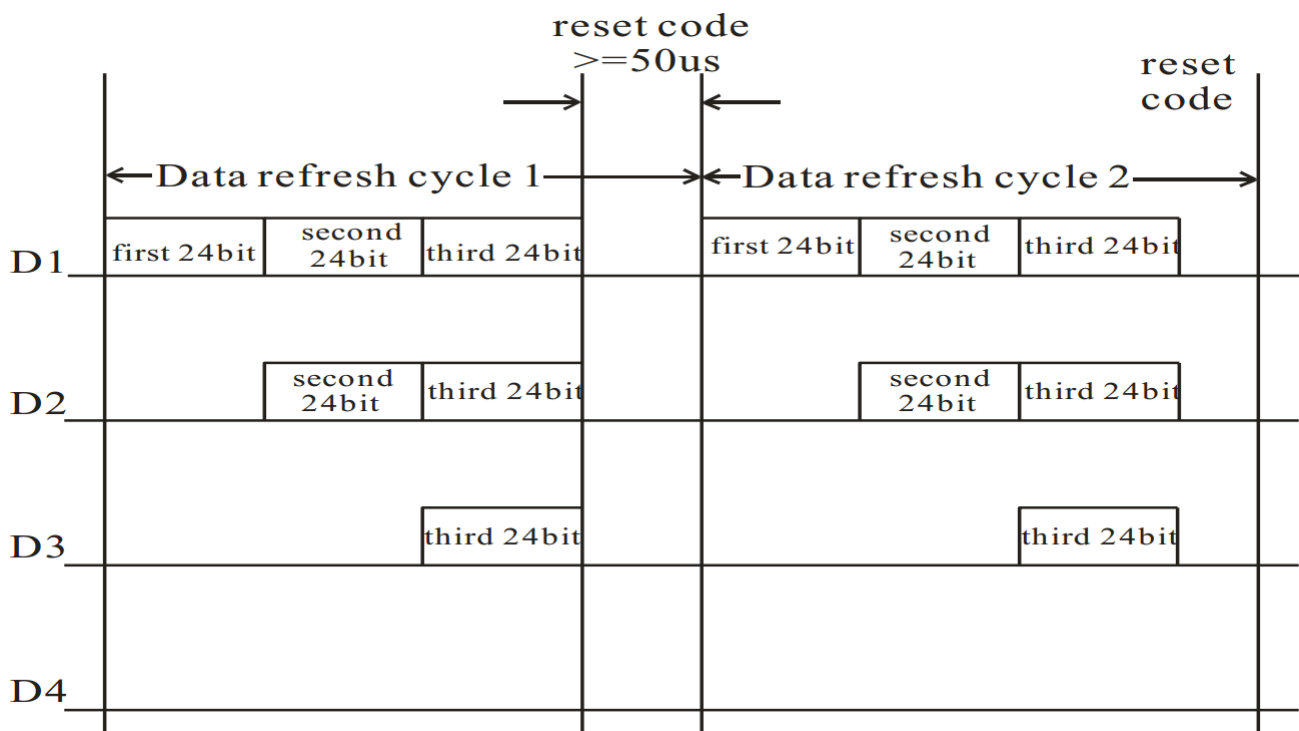


Note: The data of D1 is send by the MCU, and D2, D3, D4 through pixel internal reshaping amplification to transmit.

## Composition of 24-bit data

|    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |    |
|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| G7 | G6 | G5 | G4 | G3 | G2 | G1 | G0 | R7 | R6 | R5 | R4 | R3 | R2 | R1 | R0 | B7 | B6 | B5 | B4 | B3 | B2 | B1 | B0 |
|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|

Note: Follow the order of GRB to send data and the high bit sent at first.


## Typical application circuit

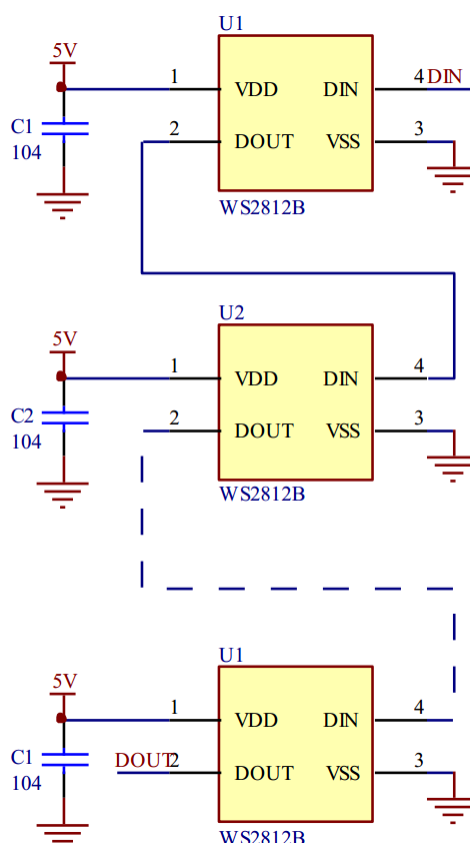


## The Materials of PCB:

Epoxy PCB with white finishing.  
Conducting Tracks: Cu, 35um thickness, double sided.

Solderings:  
Solder Alloy: 99.3 Sn, 0.7 Cu,  
Melting Temperature: 227°C  
No SVHC (17-Dec-2014)

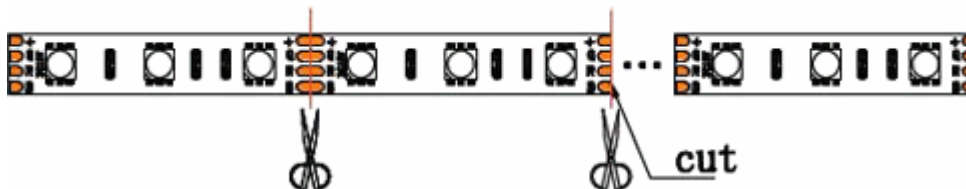

## Packing:

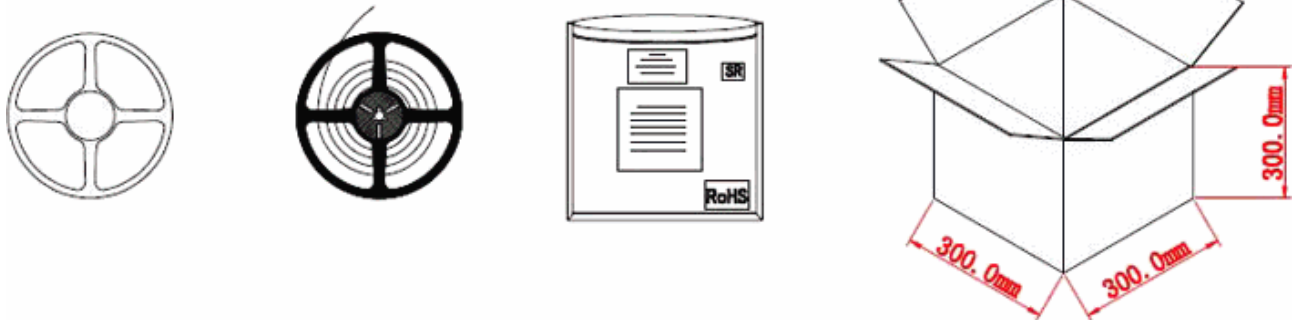

## Certificate of Conformity:

EC Council Directive 2004/108/EC  
Electromagnetic Compatibility  
Registration No.: ATE20120944

### Complies to the Standards:

- EN 55015: 2006 + A1: 2007 + A2: 2009
- EN 61000-3-2: 2006 + A1: 2009 + A2: 2009
- EN 61000-3-3: 2008
- EN 61547: 2009

While LuxaLight has made every reasonable effort to ensure the accuracy of the information in this brochure, TE does not guarantee that it is error-free, nor does LuxaLight make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. LuxaLight reserves the right to make any adjustments to the information contained herein at any time without notice. LuxaLight expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalog are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult LuxaLight for the latest dimensions and design specifications.