

## Datasheet

LED Strip Specification

LED strip type:  
**LS24RGBWW84X5050PLX**

Description:  
**LuxaLight Long Life LED Strip 24V Full-Color + Warm White + White  
High Power Protected 5050  
(24 Volt, 84 LEDs, 5050, IP64)**



Date:11-7-2018

Page 1 of 5

**Parameters:**

Basic Parameters	
LED Type	5050 SMD
Color	RGBWW+W
CRI	≥ 80 Ra
Viewing Angle (θ)	120 ±5°
LED Qty	84 LEDs / mtr
IP grade	IP64 Silicone
Dimensions	1000 * 12 * 4mm
Weight	70g ~ 80g / meter
Lifespan	70,000 hours
LB Value	L80B50
Warranty	5 Years

Environment Parameters	
Working Temperature	-25°C ~ +70°C
Storage Temperature	-20°C ~ +60°C


Electronic Specifications	
Working Voltage	DC24V
Working Current	1A / mtr
Working Wattage	24W / mtr
Driving Method	Constant Voltage

Wires & connection length	
Wires	UL1007 20# 150mm
Length per segment	83.33 mm
LEDs / segment	7
Standard length on a reel	10m


Luminous Flux (Lumen/Meter)	
Red	280 Lumen
Green	406 Lumen
Blue	259 Lumen
Warm White	684 Lumen
White	534 Lumen

Wave Length/ Color Temperature	(nm/k)
Red	620 ~ 630 nm
Green	510 ~ 525 nm
Blue	455 ~ 470 nm
Warm White	2700 ~ 2900 K
White	7900 ~ 8100 K


**CIE1931 Red:**

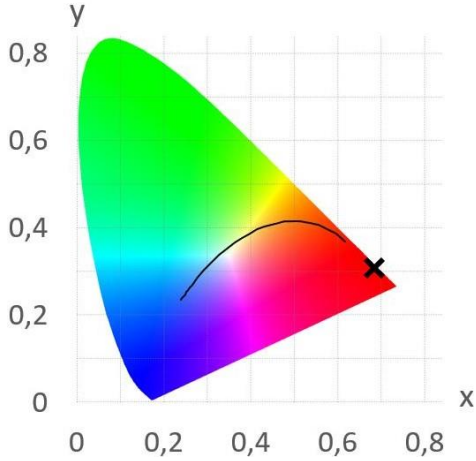


**CIE1931 Green:**

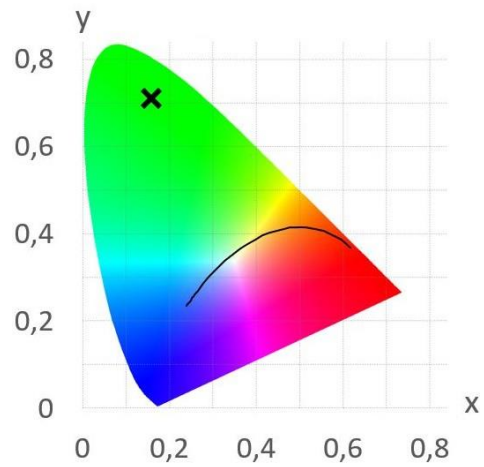


**CIE1931 Blue:**

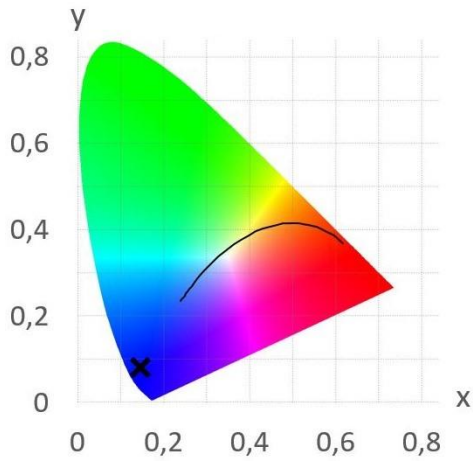


**CIE1931 Warm White:**

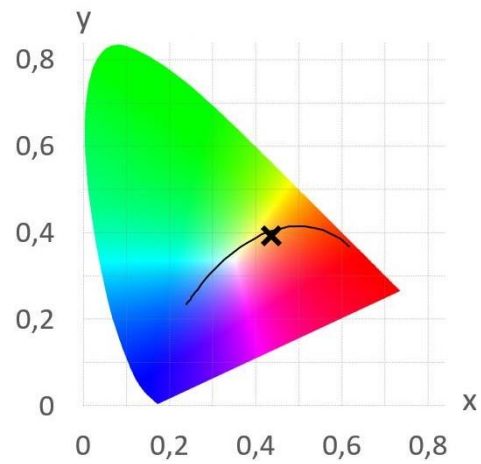


**CIE1931 White:**

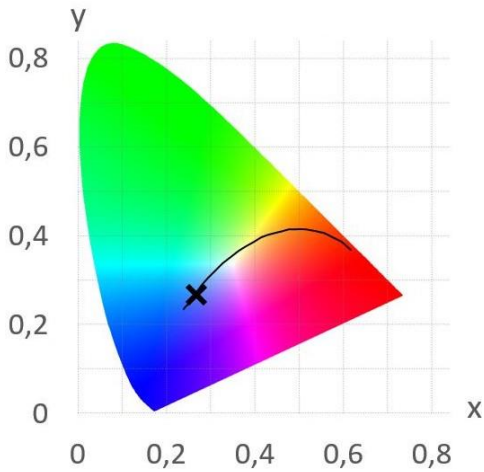


**Wavelength Red:**

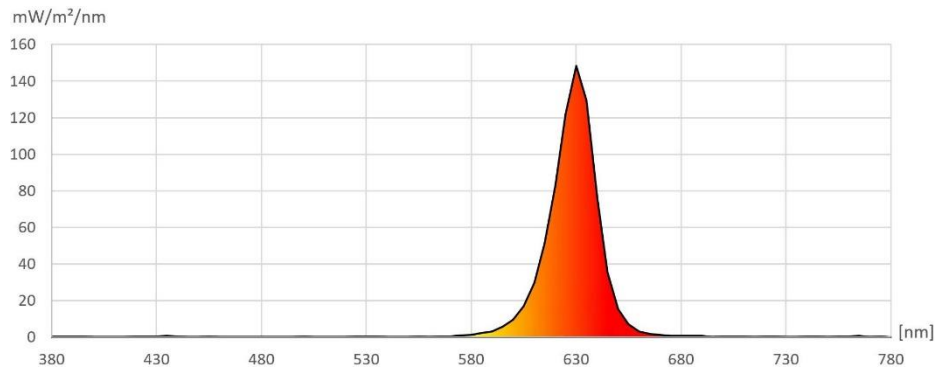


### Wave Length Green:

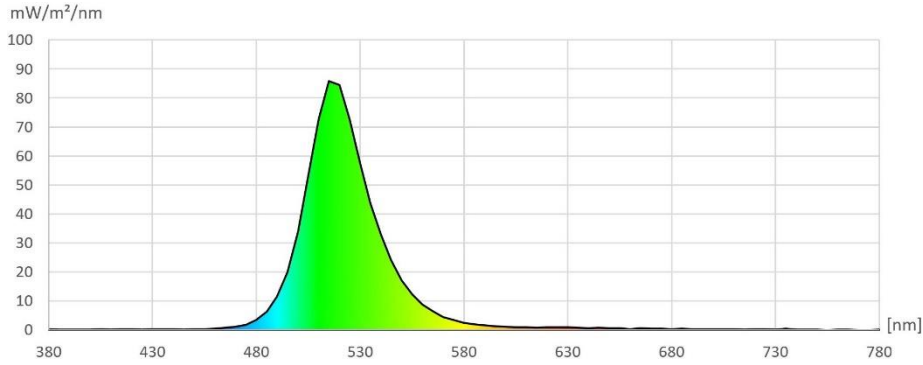


### Wave Length Blue:

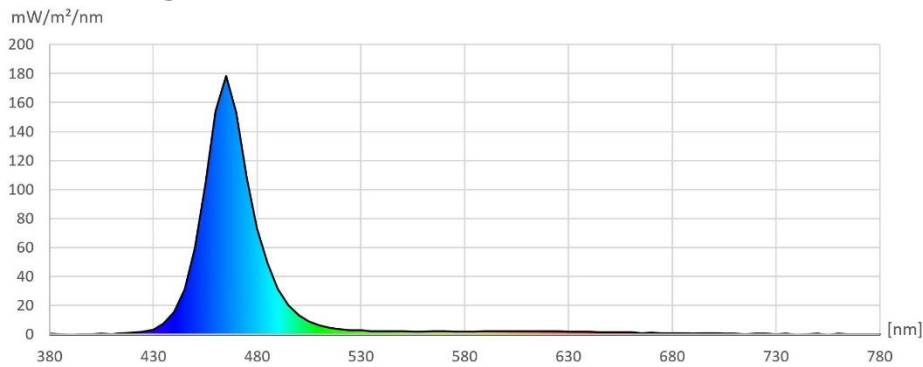

### Wave Length Warm White:

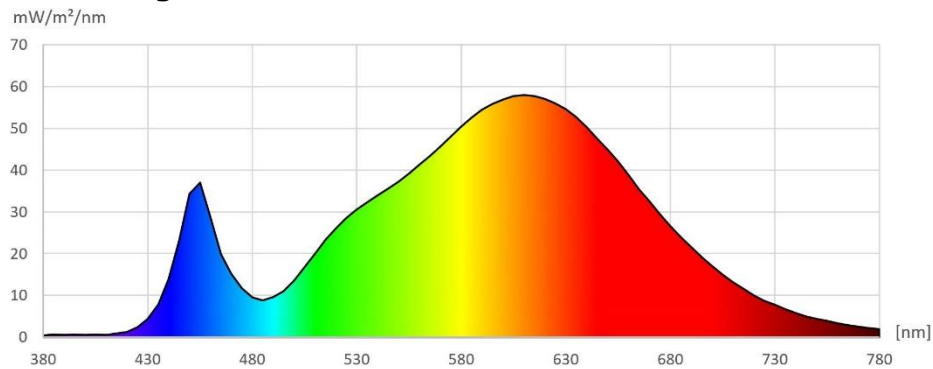

### Wave Length White:

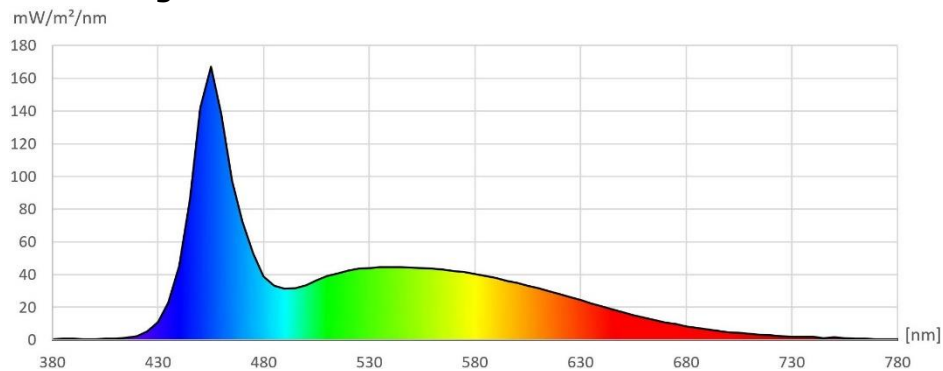

## The Materials of PCB:

Epoxy PCB with white finishing.  
Conducting Tracks: Cu, 35um thickness, double sided.

Solderings:  
Solder Alloy: 99.3 Sn, 0.7 Cu,  
Melting Temperature: 227°C  
No SVHC (17-Dec-2014)

## Certificate of Conformity:

EC Council Directive 2004/108/EC  
Electromagnetic Compatibility

Complies to the Standards:

- EN 55015: 2006 + A1: 2007 + A2: 2009
- EN 61000-3-2: 2006 + A1: 2009 + A2: 2009
- EN 61000-3-3: 2008
- EN 61547: 2009

While LuxaLight has made every reasonable effort to ensure the accuracy of the information in this brochure, TE does not guarantee that it is error-free, nor does LuxaLight make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. LuxaLight reserves the right to make any adjustments to the information contained herein at any time without notice. LuxaLight expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalog are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult LuxaLight for the latest dimensions and design specifications.