

Datasheet

LED engine specification

Product type:
LE-24-365-108X2835PLX

Description:
LuxaLight LED Engine 24V 365nm 2835 (24 Volt, 108 LEDs, 2835, IP64)



Date:
08-08-2022

Basic Parameters	
LED Type	2835 SMD
Color	365nm UV-A
Viewing Angle (θ)	120 $\pm$ 5°
LED Qty	108 LEDs
IP grade	IP64 Silicone Coating
Dimensions	200 * 20 * 2 mm
Weight	22g
Mounting	3M tape VHB4905
Lifespan	70,000hours
Warranty	5 Years

Environment Parameters	
Working Temperature	-25°C ~ +70°C
Storage Temperature	-20°C ~ +60°C


Electronic Specifications	
Working Voltage	DC24V
Working Current	1,25 A/
Working Wattage	30 W/ mtr
Driving Method	Constant Voltage

Radiance (W)	
UV 365nm	11,84 W

Wavelength/ Color Temperature	(nm/k)
UV-A	365 nm

NTC parameters	
Resistance (Ohm)	10KOhm
Beta Value	3435

Wavelength UV-A 365nm:

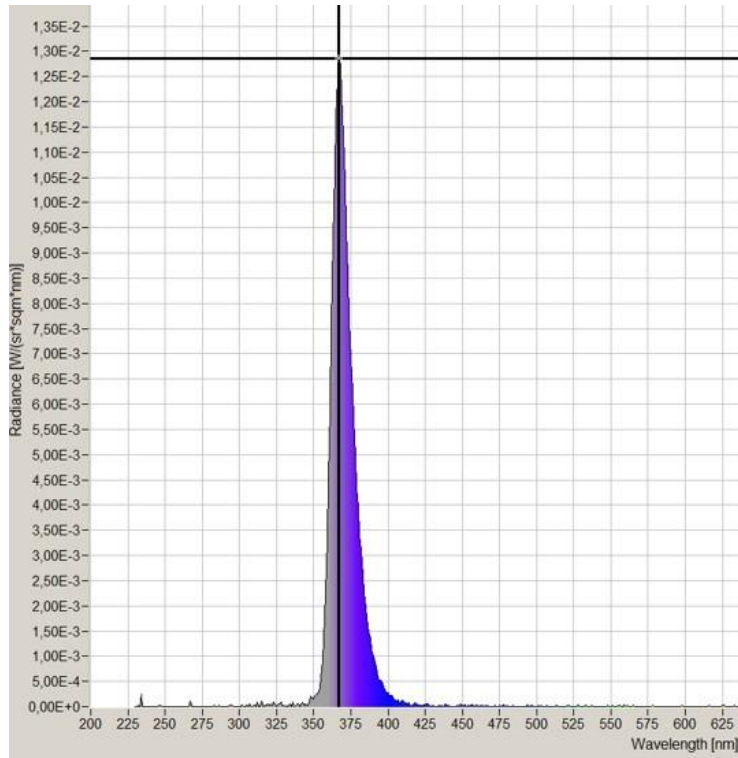

The Materials of PCB:

2mm Thick Aluminium.

Solderings:

Solder Alloy: 99.3 Sn, 0.7 Cu,

Melting Temperature: 227°C

No SVHC (Jan 2021)

Certificate of Conformity:

EC Council Directive 2004/108/EC

Electromagnetic Compatibility

Complies to the standards:

- NEN-EN-IEC 61000-3-2:2019/A1:2021
- NEN-EN-IEC 61000-3-3:2013+A1:2017+A2:2021
- NEN-EN-IEC 61547:2009

While LuxaLight has made every reasonable effort to ensure the accuracy of the information in this brochure, LuxaLight does not guarantee that it is error-free, nor does LuxaLight make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. LuxaLight reserves the right to make any adjustments to the information contained herein at any time without notice. LuxaLight expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalogue are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult LuxaLight for the latest dimensions and design specifications.