

## Datasheet

LED-strip specification

LED-strip type:

**LS30RXC0BXPLX**

Description:

**LuxaLight COB LED-strip Red Protected  
(30 Volt, 512 LEDs, COB, IP64)**



Date:  
20-02-2023

Page 1 of 4

<b>Basic Parameters</b>	
LED Type	COB
Color	Red
Viewing Angle ( $\theta$ )	120 $\pm$ 5°
LED Qty	512 LEDs/ mtr
IP grade	IP64 Silicone
Dimensions	1000 * 10 * 4mm
Weight	35g ~ 50g/ meter
Mounting	3M VHB4905
Lifespan	70,000hours
LB Value	L80B10
BIN	3 SDCM
Warranty	5 Years

<b>Environment Parameters</b>	
Working Temperature	-25°C ~ +75°C
Storage Temperature	-20°C ~ +60°C


<b>Electronic Specifications</b>	
Working Voltage	DC30V
Working Current	0.4 A/ mtr
Working Wattage	12 W/ mtr
Driving Method	Constant Voltage

<b>Wires &amp; connection length</b>	
Wires	UL1007 20# 150mm
Length per segment	62,5mm
LEDs / segment	32
Standard length on a reel	10m


<b>Luminous Flux (Lumen/Meter)</b>	
Red	180 Lumen

<b>Wavelength/ Color Temperature (nm/k)</b>	
Red	620~630 nm


**CIE1931 Red:**

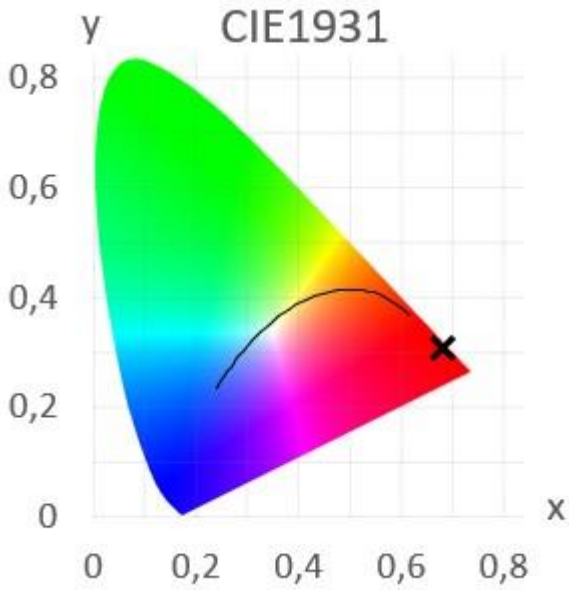

**Optical Characteristics Curve:**

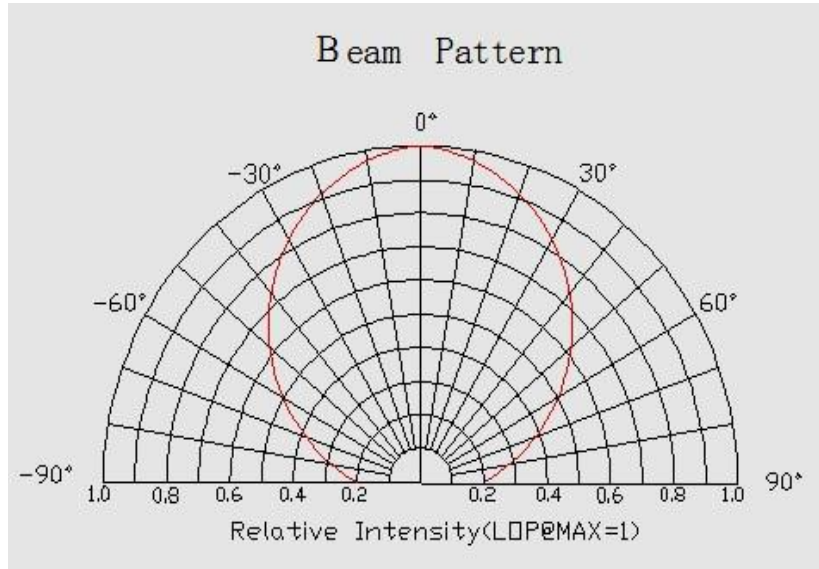

**Wavelength Red:**

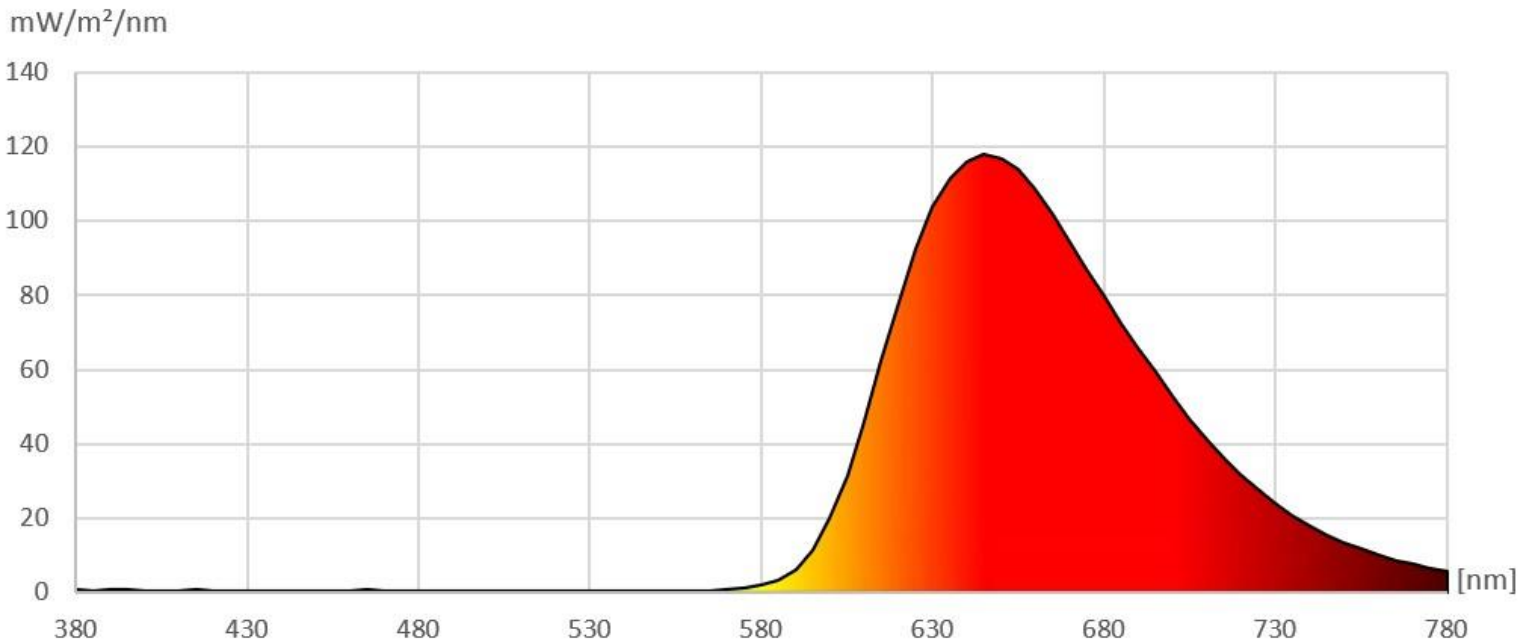

**The Materials of PCB:**

Conducting Tracks: Cu, 35um thickness, double sided.

**Solderings:**

Solder Alloy: 99.3 Sn, 0.7 Cu,

Melting Temperature: 227°C

No SVHC (Jan 2021)

**Certificate of Conformity:**

EC Council Directive 2004/108/EC

Electromagnetic Compatibility

**Complies to the standards:**

- NEN-EN-IEC 61000-3-2:2019/A1:2021
- NEN-EN-IEC 61000-3-3:2013+A1:2017+A2:2021
- NEN-EN-IEC 61547:2009

While LuxaLight has made every reasonable effort to ensure the accuracy of the information in this brochure, LuxaLight does not guarantee that it is error-free, nor does LuxaLight make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. LuxaLight reserves the right to make any adjustments to the information contained herein at any time without notice. LuxaLight expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalogue are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult LuxaLight for the latest dimensions and design specifications.