

Datasheet

LED engine specification

Product type:
LF-24-735-24.2X16-TC

Description:
**LuxaLight Industrial LED Fixture Transparent cover Far Red 735nm
24.2x16mm
(24 Volt, 2835, IP64)**




Date:
07-12-2023

Page 1 of 6


Technical Specifications					
LF-24-735-24.2x16-TC		Transparent Cover TC			
General	LED Type	2835 SMD			
	LED Quantity	108 LEDs / Engine			
	Dimensions	220mm - 3000mm * 24,2mm * 16mm (B x L x H)			
	Weight	Variable, depending on moulding and length			
	Infosheet	LuxaLight Industrial LED Fixtures infopage			
Environment	Working Temperature	-5°C ~ +60°C			
	Storing Temperature	-5°C ~ +60°C			
	IP Grade	IP64			
	Mechanical Protection	PMMA Transparant cover			
	Moulding Resin	N.A.			
	Housing material	Anodized aluminium			
Electronic	Working Voltage	DC24V			
	Working Current	1,25 A / Engine			
	Working Wattage	30 W / Engine			
	LED Engine type	LuxaLight LED Engine Far Red 735nm 24V 2835 IP64			
	Driving Method	Constant Voltage			
	Cable type	PUR Cable 4x 0.5mm² Gray LuxaLight			
	NTC Resistance	5KOhm			
	NTC Beta	3950			
Lighting	Engine Wavelength (nm)	735nm Far Red			
	Voltage at measurement	24V	29V	34V	
	Current at measurement	1,25A	1,9A	2,65A	
	Wattage at measurement	30W	55,1W	90,1W	
	Peak Measured Wavelength (5cm)	737nm			
	Peak Measured Radiance per distance (cm) (1 LED Engine)*	5	11,3 W/m²	14,2 W/m²	17,1 W/m²
		7,5	6,2 W/m²	7,8 W/m²	9,4 W/m²
		10	4 W/m²	5 W/m²	6 W/m²
		20	1,2 W/m²	1,5 W/m²	1,8 W/m²
		30	0,6 W/m²	0,8 W/m²	1 W/m²
		40	0,4 W/m²	0,5 W/m²	0,6 W/m²
		60	0,25 W/m²	0,3 W/m²	0,4 W/m²
	Total Radiance per distance 230nm - 1000nm (cm) (1 LED Engine)*	5	424 W/m²	900 W/m²	1115 W/m²
		7,5	232 W/m²	314 W/m²	389 W/m²
		10	148 W/m²	200 W/m²	248 W/m²
		20	46 W/m²	62 W/m²	77 W/m²
		30	22 W/m²	30 W/m²	37 W/m²
		40	14 W/m²	19 W/m²	23 W/m²
	Total PPFD ePAR (700nm - 750nm) (1 LED Engine)*	5	2119 µmol/m²	2466 µmol/m²	3024 µmol/m²
		7,5	1165 µmol/m²	1356 µmol/m²	1663 µmol/m²
10		745 µmol/m²	867 µmol/m²	1063 µmol/m²	
20		232 µmol/m²	270 µmol/m²	331 µmol/m²	
30		113 µmol/m²	132 µmol/m²	162 µmol/m²	
40		73 µmol/m²	85 µmol/m²	104 µmol/m²	
60	48 µmol/m²	56 µmol/m²	69 µmol/m²		
Output Reduction Approx.		0% - 5%			
Viewing Angle (θ)		120 ±5°			

Additional Benefits of LuxaLight Industrial LED Fixture	
Benefits of LED Fixture	Multiple wavelengths in one housing
	No optics required due to high output
	Applicable in Humid environments (PU Version)
	Custom cable output and/or connector
	Wide range of mounting options
	In-house expertise to personally advice on LED fixture customization
	*By using the pulse mode in combination with real-time monitoring extremely high output
	*Different wavelengths in one fixture that can be controlled/pulsed separately


Radiance Drop-off by distance at 24V

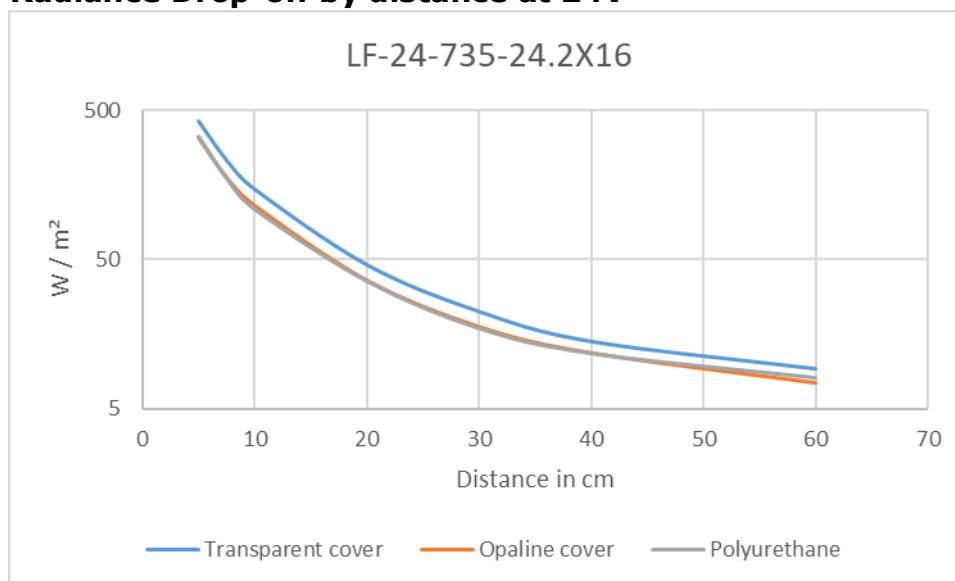


µmol/m² Drop-off by distance at 24V

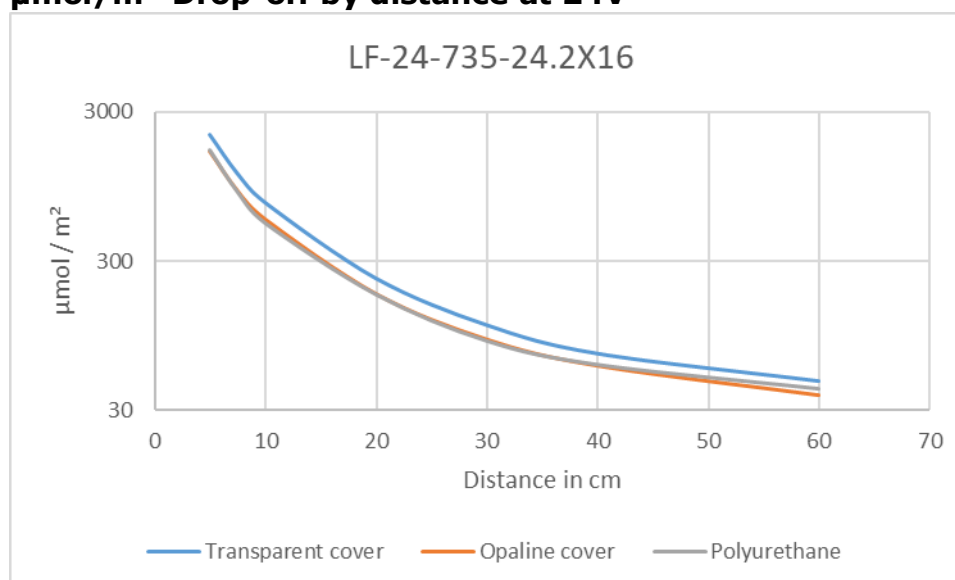

Measurement with Transparent cover at 24V

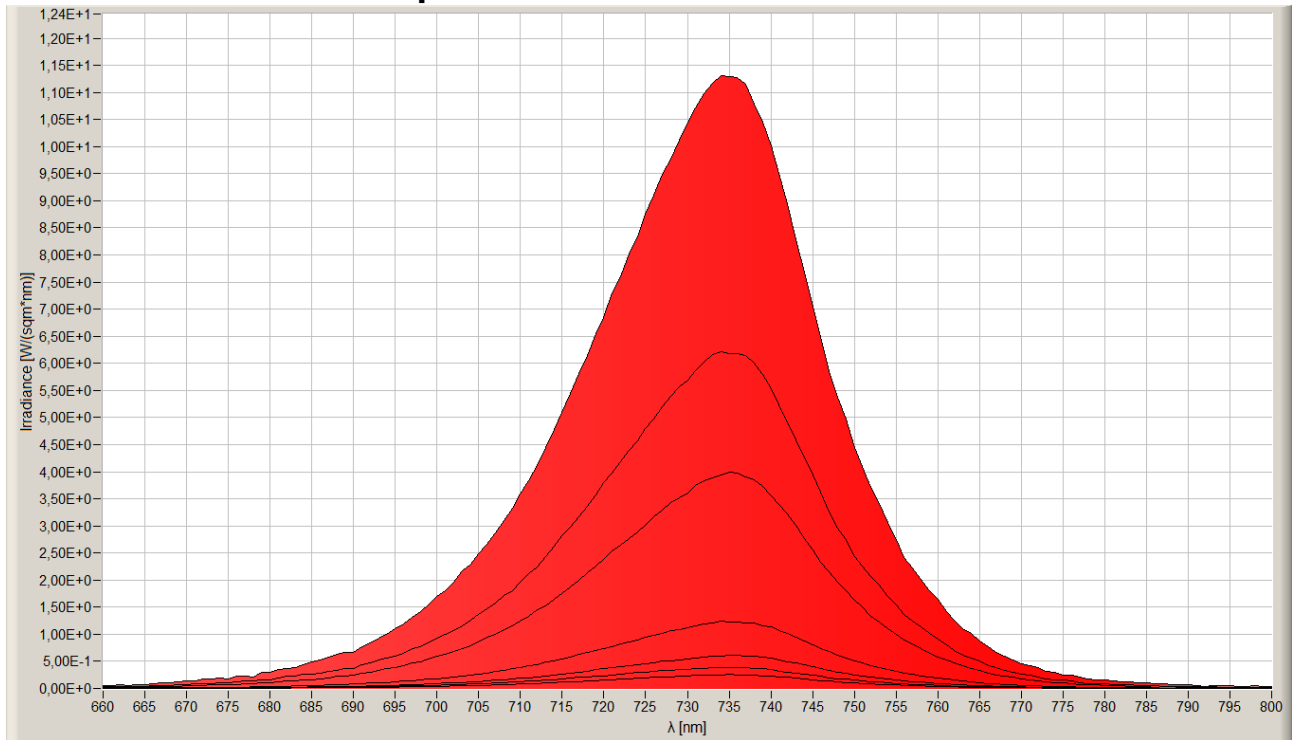


Dimensions

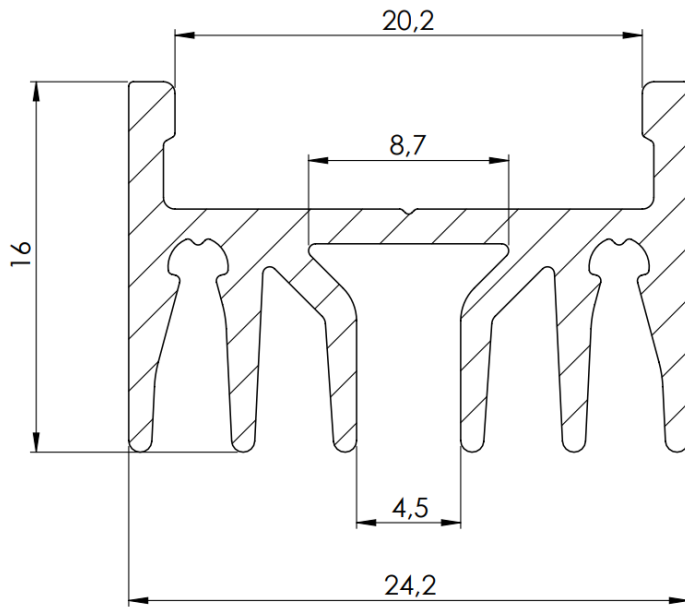

Temperature Distribution

Temperature (Solid) [°C]
Temperature ambient: 25°C
Total power: 36 W/m

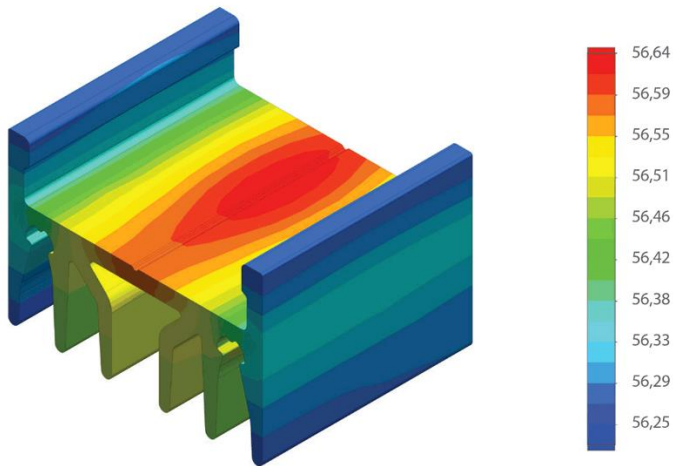

Certificate of Conformity:

EC Council Directive 2004/108/EC
Electromagnetic Compatibility

Complies to the standards:

- NEN-EN-IEC 61000-3-2:2019/A1:2021
- NEN-EN-IEC 61000-3-3:2013+A1:2017+A2:2021
- NEN-EN-IEC 61547:2009

While LuxaLight has made every reasonable effort to ensure the accuracy of the information in this brochure, LuxaLight does not guarantee that it is error-free, nor does LuxaLight make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. LuxaLight reserves the right to make any adjustments to the information contained herein at any time without notice. LuxaLight expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalogue are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult LuxaLight for the latest dimensions and design specifications.