

# Datasheet

## LuxaLight LED Engine 24V UV-A 365nm 3535 60° (24 Volt, 30 LEDs, 3535, IP20)

**LE-24-365-30X3535ILX60**

**Version: 2025-03-28.1**

## Product description

Our advanced UV-A 365nm LED engine offers a powerful solution for a wide range of industrial and research-related applications. This LED engine is designed for use in environments where precision, flexibility, and reliability are essential, but without the housing, making it an ideal choice for applications that require customized integration. The LED engine provides a range of unique advantages:

**Optimal Wavelength for Specific Applications:** The 365 nm wavelength is ideal for applications requiring UV-A light, such as curing, fluorescence, and photochemical processes. This wavelength provides high energy intensity, essential for activating photochemical reactions in various industrial and research environments.

**Stroboscopic Pulse Function:** The strobing pulse technology enables the generation of radiation with higher peak intensity. This technique increases efficiency in processes that are sensitive to short light pulses. The ability to deliver rapid, repeated pulses enhances effectiveness in applications such as surface treatment, photopolymerization, or material processing. This functionality is fully supported when integrated with the Manima Pollux Industry system, providing precise control and optimization of pulse intensity for maximum performance.

**Increased Radiation Capacity:** When integrated with the Manima Pollux Industry system, the UV-A 365nm LED engine achieves a radiation capacity significantly higher than conventional systems. This provides benefits such as accelerated reactions, improved industrial machine performance, and more accurate control over treatment parameters.

**60-Degree Optics for Precise Radiation Placement:** The LEDs are equipped with 60-degree optics, ensuring that the radiation is directed exactly where it is needed. This increases efficiency by focusing the UV-A light on the treatment surface, enhancing the overall effectiveness in applications where precision and targeted irradiation are crucial.

**Reliable Performance and Long Lifespan:** The robust construction of the LED engine ensures reliable performance, even without the protective housing. The long lifespan of the LEDs reduces the need for frequent replacements and minimizes downtime, contributing to higher operational efficiency and lower maintenance costs.

**Energy Efficiency and Sustainability:** Our technology is designed with energy efficiency in mind, reducing operational costs while optimizing energy output. This makes it a sustainable choice for industrial applications looking to minimize energy consumption and environmental impact.

**Built-in NTC Sensor:** The LED engine is equipped with an NTC (Negative Temperature Coefficient) sensor for precise temperature regulation. This ensures that the system operates within optimal temperature ranges for maximum performance and extended lifespan.

**Real-time Monitoring and Maximum Radiation:** When combined with the Manima Pollux Industry system, real-time monitoring allows for achieving the maximum radiation output from the UV-LED fixture. This integration provides precision control, ensuring the system operates with maximum efficiency under varying conditions.

### Applications:

- **Curing Coatings and Inks:** Ideal for fast curing of coatings, inks, and adhesives in industrial production lines.
- **Fluorescence Research:** For applications where materials fluoresce under UV-A light, such as detecting cracks or studying material aging.
- **Photochemical Reactions:** Perfect for activating photochemical processes in laboratory environments.
- **Material Processing and Surface Treatment:** For applications that require precision and control in material processing, such as improving adhesion or activating chemical reactions.
- **Research and R&D:** Suitable for scientific research where the 365 nm wavelength is necessary, such as testing UV stability or investigating fluorescent properties of materials.
- **Reactor Applications:** The UV-A 365nm LED engine is particularly suited for reactors using UV light to accelerate photochemical reactions, such as in pharmaceutical, chemical, and environmental industries. The high intensity of the LED engine provides advantages in applications like water treatment, wastewater purification, and synthesizing chemical compounds.

With the combination of the 365 nm UV-A LED engine, stroboscopic pulse function, 60-degree optics, and real-time monitoring, this is the ideal choice for applications requiring precision, power, and efficiency.

## Technical specifications


General																
Brand	LuxaLight															
Application	Curing & Aging Machine Vision UV Inspection															
LED type	3535															
PCB color	White															
Material	Aluminum															
Dimensions	200 × 20 × 2 mm															
Mounting	3M tape VHB4905															
LEDs per piece	30.00															
Lighting																
Wave length	365nm															
Beam angle	60 °															
Measurement results																
Irradiance	<table><tr><th>Value</th><th>Measuring distance</th></tr><tr><td>703 W/m2</td><td>75 mm</td></tr><tr><td>529 W/m2</td><td>100 mm</td></tr><tr><td>234 W/m2</td><td>200 mm</td></tr><tr><td>110 W/m2</td><td>300 mm</td></tr><tr><td>62 W/m2</td><td>400 mm</td></tr><tr><td>28 W/m2</td><td>600 mm</td></tr></table>		Value	Measuring distance	703 W/m2	75 mm	529 W/m2	100 mm	234 W/m2	200 mm	110 W/m2	300 mm	62 W/m2	400 mm	28 W/m2	600 mm
	Value	Measuring distance														
	703 W/m2	75 mm														
	529 W/m2	100 mm														
	234 W/m2	200 mm														
	110 W/m2	300 mm														
	62 W/m2	400 mm														
	28 W/m2	600 mm														
<ul style="list-style-type: none"><li>• By combining Pulse Mode with Real-Time Monitoring, the efficiency of LED systems can be increased, resulting in higher output.</li><li>• We have the expertise and equipment to perform measurements tailored to the specific requirements of the application.</li></ul>																
Electronics																
Working voltage	24V															
Current per piece	0.90 A / piece															
Power consumption per piece	21.60 W / piece															
PCB material	Aluminium															
Pinout	<table><tr><th>Symbol</th><th>Function</th></tr><tr><td>V+</td><td>V+</td></tr><tr><td>GND</td><td>Ground</td></tr><tr><td>NTC</td><td>NTC sensor</td></tr><tr><td>NTC_GND</td><td>NTC ground</td></tr></table>		Symbol	Function	V+	V+	GND	Ground	NTC	NTC sensor	NTC_GND	NTC ground				
	Symbol	Function														
	V+	V+														
	GND	Ground														
	NTC	NTC sensor														
	NTC_GND	NTC ground														
NTC parameters	Resistance: 5000 Ohm Beta value: 3950															
Environmental																

Operating temperature	-20 ~ +60 °C
Storage temperature	-40 ~ +80 °C
IP class	IP 20

#### Directives - standards - certificates

Directives	RoHS CE
Safety standards	EN60598-1 EN62031 IEC62471

## Measurement results

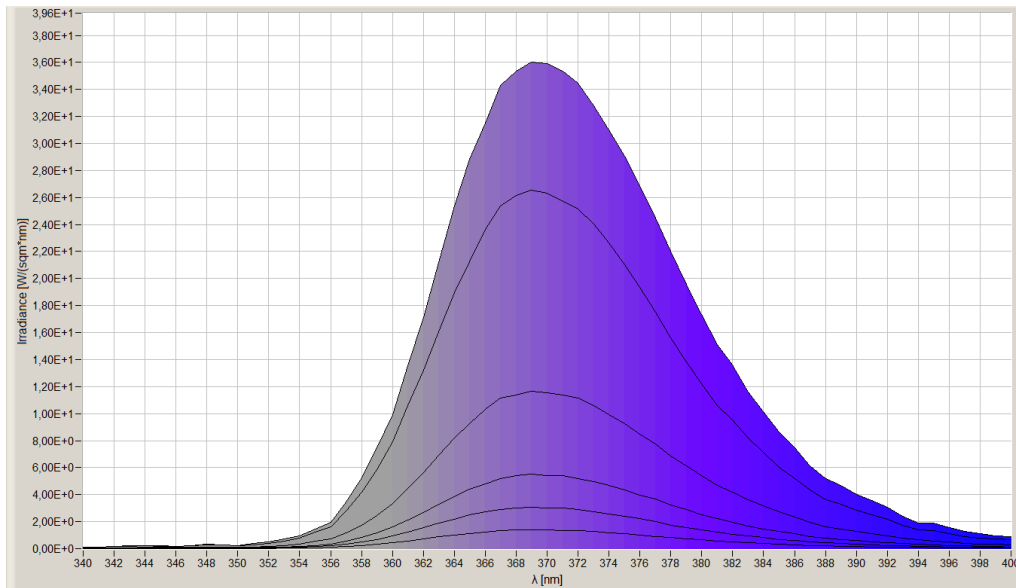

While LuxaLight has made every reasonable effort to ensure the accuracy of the information in this brochure, LuxaLight does not guarantee that it is error - free, nor does LuxaLight make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. LuxaLight reserves the right to make any adjustments to the information contained herein at any time without notice. LuxaLight expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalogue are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult LuxaLight for the latest dimensions and design specifications.