

Datasheet

LuxaLight LED Engine UV-A 395nm Protected (24 Volt, 108 LEDs, 2835, IP64)

LE-24-395-108X2835PLX

Version: 2025-07-09.2

Product description

Our advanced UV-A 395nm LED engine offers a powerful solution for a wide range of industrial and research-related applications. This LED engine is designed for use in environments where precision, flexibility, and reliability are essential, but without the housing, making it an ideal choice for applications that require customized integration. The LED engine provides a range of unique advantages:

Optimal Wavelength for Specific Applications: The 395 nm wavelength is ideal for applications requiring UV-A light, such as curing, fluorescence, and photochemical processes. This wavelength provides high energy intensity, essential for activating photochemical reactions in various industrial and research environments.

Stroboscopic Pulse Function: The strobing pulse technology enables the generation of radiation with higher peak intensity. This technique increases efficiency in processes that are sensitive to short light pulses. The ability to deliver rapid, repeated pulses enhances effectiveness in applications such as surface treatment, photopolymerization, or material processing. This functionality is fully supported when integrated with the Manima Pollux Industry system, providing precise control and optimization of pulse intensity for maximum performance.

Increased Radiation Capacity: When integrated with the Manima Pollux Industry system, the UV-A 395nm LED engine achieves a radiation capacity significantly higher than conventional systems. This provides benefits such as accelerated reactions, improved industrial machine performance, and more accurate control over treatment parameters.

Reliable Performance and Long Lifespan: The robust construction of the LED engine ensures reliable performance, even without the protective housing. The long lifespan of the LEDs reduces the need for frequent replacements and minimizes downtime, contributing to higher operational efficiency and lower maintenance costs.

Energy Efficiency and Sustainability: Our technology is designed with energy efficiency in mind, reducing operational costs while optimizing energy output. This makes it a sustainable choice for industrial applications looking to minimize energy consumption and environmental impact.

Built-in NTC Sensor: The LED engine is equipped with an NTC (Negative Temperature Coefficient) sensor for precise temperature regulation. This ensures that the system operates within optimal temperature ranges for maximum performance and extended lifespan.

Real-time Monitoring and Maximum Radiation: When combined with the Manima Pollux Industry system, real-time monitoring allows for achieving the maximum radiation output from the UV-LED fixture. This integration provides precision control, ensuring the system operates with maximum efficiency under varying conditions.

Applications:

- **Curing Coatings and Inks:** Ideal for fast curing of coatings, inks, and adhesives in industrial production lines.
- **Fluorescence Research:** For applications where materials fluoresce under UV-A light, such as detecting cracks or studying material aging.
- **Photochemical Reactions:** Perfect for activating photochemical processes in laboratory environments.
- **Material Processing and Surface Treatment:** For applications that require precision and control in material processing, such as improving adhesion or activating chemical reactions.
- **Research and R&D:** Suitable for scientific research where the 395 nm wavelength is necessary, such as testing UV stability or investigating fluorescent properties of materials.
- **Reactor Applications:** The UV-A 395nm LED engine is particularly suited for reactors using UV light to accelerate photochemical reactions, such as in pharmaceutical, chemical, and environmental industries. The high intensity of the LED engine provides advantages in applications like water treatment, wastewater purification, and synthesizing chemical compounds.

With the combination of the 395 nm UV-A LED engine, stroboscopic pulse function, and real-time monitoring, this is the ideal choice for applications requiring precision, power, and efficiency.

Technical specifications

General		
Brand	LuxaLight	
Application	Curing & Aging Machine Vision UV Inspection	
LED type	2835	
PCB color	White	
Material	Aluminum	
Dimensions	200 × 20 × 2 mm	
Mounting	3M tape VHB4905	
LEDs per piece	108.00	
Lighting		
Wave length UV	385~410 nm	
Wave length	395nm	
Beam angle	120 °	
Measurement results		
Peak wavelength (Object size: 1 piece)	397 nm	
Peak irradiance (Object size: 1 piece)		24V
	5cm	29.4479 W/sqm
	10cm	11.1859 W/sqm
	15cm	5.70155 W/sqm
	20cm	3.45532 W/sqm
	25cm	2.33018 W/sqm
	30cm	1.70424 W/sqm
Total irradiance (Object size: 1 piece)		24V
	5cm	486.4 W/sqm
	10cm	194 W/sqm
	15cm	100.3 W/sqm
	20cm	61.2 W/sqm
	25cm	40.96 W/sqm
	30cm	30.29 W/sqm
<ul style="list-style-type: none">• By combining Pulse Mode with Real-Time Monitoring, the efficiency of LED systems can be increased, resulting in higher output.• We have the expertise and equipment to perform measurements tailored to the specific requirements of the application.		
Electronics		
Working voltage	24V	
Current per piece	1.25 A / piece	
Power consumption per piece	30.00 W / piece	
PCB material	Aluminium	

Pinout

Symbol	Function
V+	V+
GND	Ground
NTC	NTC sensor
NTC_GND	NTC ground

NTC parameters	Resistance: 5000 Ohm Beta value: 3950
----------------	--

Environmental


Operating temperature	-20 ~ +60 °C
Storage temperature	-40 ~ +80 °C
IP class	IP 64

Directives - standards - certificates


Directives	RoHS CE
Safety standards	EN60598-1 EN62031 IEC62471

Measurement results

irradiance - 375-435-uv-ablue (24V)

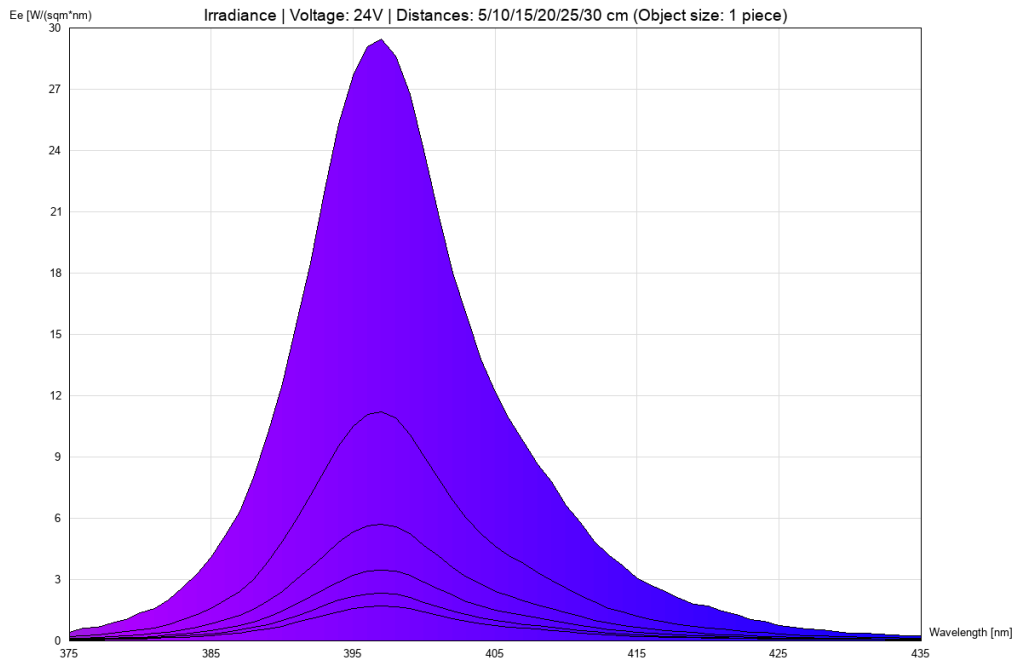

cie1931

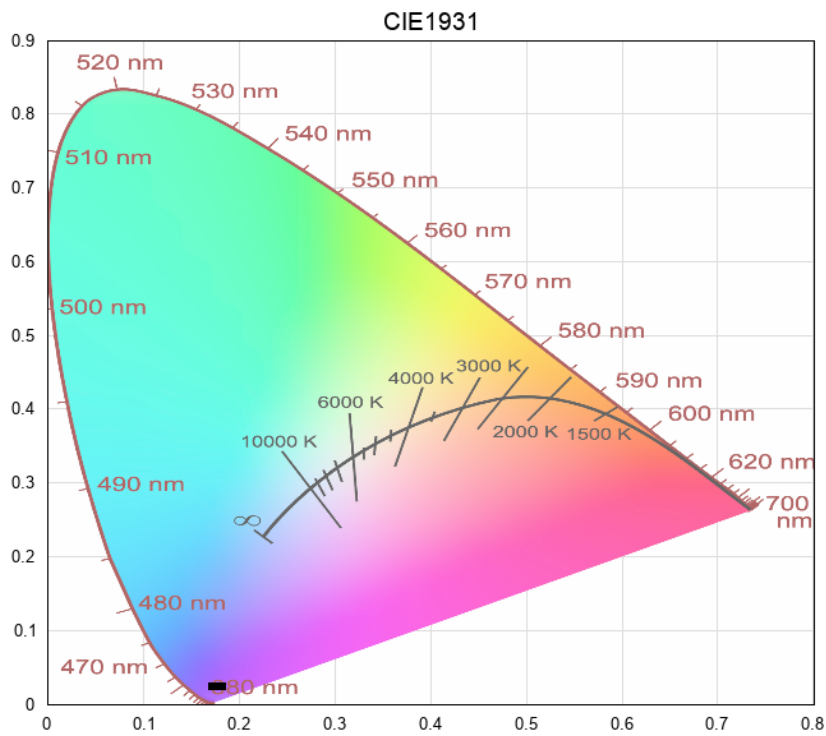

While LuxaLight has made every reasonable effort to ensure the accuracy of the information in this brochure, LuxaLight does not guarantee that it is error - free, nor does LuxaLight make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. LuxaLight reserves the right to make any adjustments to the information contained herein at any time without notice. LuxaLight expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalogue are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult LuxaLight for the latest dimensions and design specifications.