

Datasheet

LuxaLight Industrial LED Fixture Transparent IP68 UV-A 395nm 24.2x16mm (24 Volt, 2835, IP68)

LF-24-395-24.2x16-PU

Version: 2025-07-11.2

Product description

The LuxaLight Industrial UV LED Fixture is designed for intensive industrial applications that require high radiation intensity across a wide range of processes, including material curing, reactors, disinfection, and more. With a wavelength of 395nm, this LED fixture provides a reliable and efficient solution for curing coatings, resins, and other materials, as well as applications such as accelerating chemical reactions in photochemical processes, disinfecting surfaces, and supporting reactors.

The LED fixture is fully encapsulated in a durable polyurethane (PU) layer, ensuring it is IP68 waterproof and resistant to submersion in water. Additionally, it boasts a high IK10 impact resistance, meaning it can withstand heavy physical impacts, making it ideal for industrial environments where physical damage is a concern. This guarantees long-lasting performance and reliability, even in the most demanding conditions.

Key Features:

- **395nm Wavelength:** The 395nm wavelength is ideal for a wide range of industrial applications, such as curing resins, coatings, and materials, as well as for photochemical processes, reactors, and disinfection.
- **24V Power Supply:** The fixture operates on a reliable 24V power supply, ensuring stable and consistent performance, perfect for demanding industrial applications.
- **Fully Encapsulated in PU:** The LED fixture is fully encapsulated in a polyurethane (PU) layer, providing IP68 waterproofing and protection against submersion in water.
- **High IK10 Impact Resistance:** The fixture has a high IK10 impact resistance, meaning it can withstand heavy physical impacts, making it ideal for industrial environments with the risk of physical damage.
- **Integration with MaNima Pollux Industry Pulsing (Strobing):** The LED fixture supports integration with the MaNima Pollux Industry System for pulsing (strobing), enabling a significant increase in radiation intensity. This feature ensures faster reactions and enhanced efficiency in industrial processes.
- **Real-Time Temperature Monitoring via NTC Sensor:** The integrated NTC sensor ensures continuous temperature measurement and adjustment via the MaNima Pollux Industry System. This allows for the optimal maintenance of operating temperature, maximizing radiation output and consistent performance.

Applications:

- **UV Curing of Coatings:** Ideal for curing coatings in the printing industry, such as in the paint industry, where rapid curing is essential for productivity.
- **3D Printing:** Perfect for accelerating the curing of 3D printed objects, especially for resins requiring a specific 395nm wavelength to fully cure.
- **Packaging Industry:** The LED fixture is ideal for curing packaging materials, such as in the food or pharmaceutical industries, ensuring rapid curing of printed materials.
- **Disinfection:** The 395nm wavelength can also be used for disinfecting surfaces, particularly in controlled industrial environments such as laboratories and cleanrooms.
- **Reactor Applications:** Accelerating chemical reactions and photochemical processes in reactors, where the 395nm wavelength plays a key role.

Benefits:

- **High Radiation Intensity:** The ability to pulse the radiation intensity via the MaNima Pollux Industry System ensures faster curing times and increased productivity.
- **Real-Time Temperature Monitoring for Consistent Performance:** The NTC sensor, combined with the MaNima Pollux Industry System, ensures continuous temperature measurement and adjustment, maintaining optimal operating temperature and preventing overheating.
- **Industrial Durability:** Encapsulating the fixture in PU provides IP68 waterproofing and IK10 impact resistance, offering maximum protection against harsh industrial environments, moisture, and physical impact.
- **Efficiency and Speed:** The fixture provides sufficient power for fast and efficient curing, which is essential for industrial production systems that need to cure large volumes of material quickly.
- **Long-Term Reliable Performance:** The use of high-quality materials and robust design features ensures long-term performance and reliability, even in demanding industrial applications.

Technical specifications

General		
Brand	LuxaLight	
Application	Curing & Aging Machine Vision UV Inspection	
LED type	2835	
Material	Aluminum	
Dimensions	220 × 24,2 × 16 mm	
Mounting	Surface mounted	
Cover type	Polyurethane	
LEDs per piece	108.00	
Lighting		
Wave length UV	395	
Beam angle	120 °	
Measurement results		
Peak wavelength (Object size: 1 piece)	397 nm	
Peak irradiance (Object size: 1 piece)		24V
	5cm	31.455 W/sqm
	10cm	9.63116 W/sqm
	15cm	4.68617 W/sqm
	20cm	2.77864 W/sqm
	25cm	1.79776 W/sqm
	30cm	1.29204 W/sqm
Total irradiance (Object size: 1 piece)		24V
	5cm	501.4 W/sqm
	10cm	161.3 W/sqm
	15cm	80.26 W/sqm
	20cm	47.12 W/sqm
	25cm	30.74 W/sqm
	30cm	22.23 W/sqm
<ul style="list-style-type: none">• By combining Pulse Mode with Real-Time Monitoring, the efficiency of LED systems can be increased, resulting in higher output.• We have the expertise and equipment to perform measurements tailored to the specific requirements of the application.		
Electronics		
Working voltage	24V	
Current per piece	1.25 A / piece	
Power consumption per piece	30.00 W / piece	
PCB material	Aluminium	

Pinout

Symbol	Function
V+	V+
GND	Ground
NTC	NTC sensor
NTC_GND	NTC ground

NTC parameters	Resistance: 5000 Ohm Beta value: 3950
----------------	--

Environmental


Operating temperature	-20 ~ +60 °C
Storage temperature	-40 ~ +80 °C
IP class	IP 68

Directives - standards - certificates


Directives	RoHS CE
Safety standards	EN60598-1 EN62031 IEC62471

Measurement results

irradiance - 375-435-uv-ablue (24V)

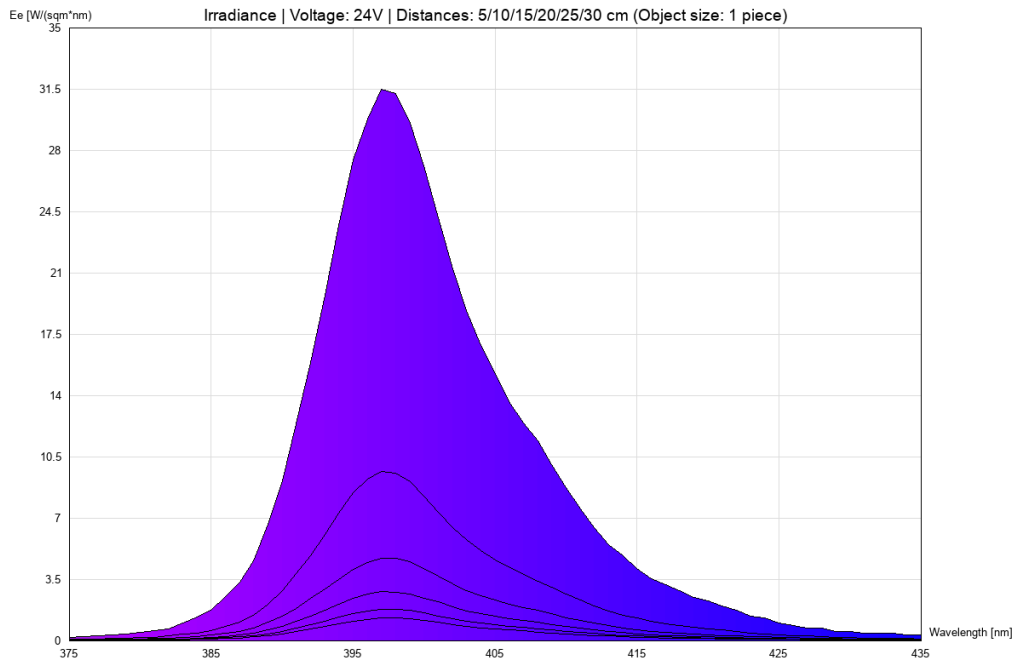

cie1931

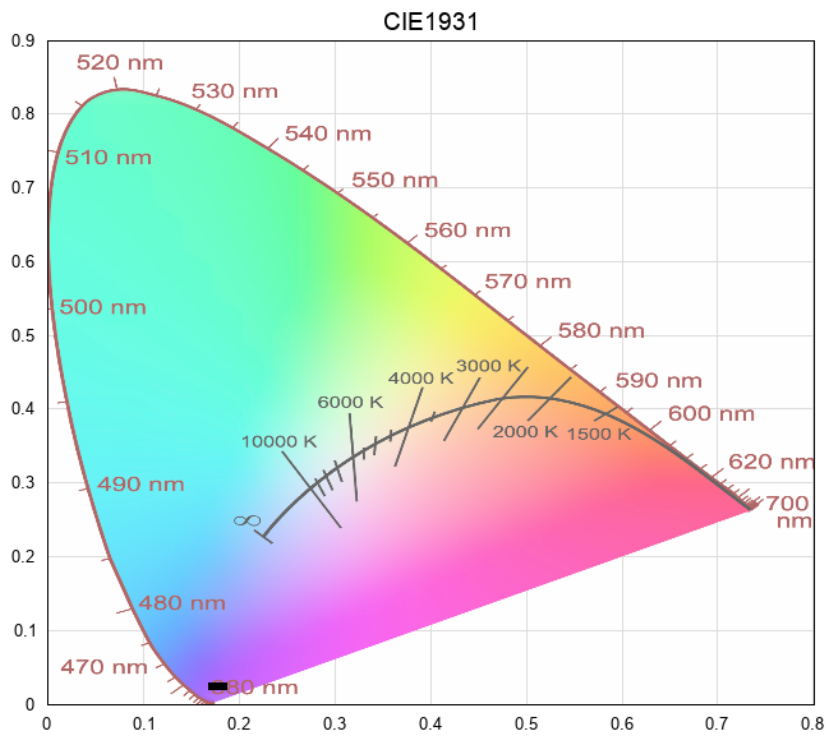

While LuxaLight has made every reasonable effort to ensure the accuracy of the information in this brochure, LuxaLight does not guarantee that it is error - free, nor does LuxaLight make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. LuxaLight reserves the right to make any adjustments to the information contained herein at any time without notice. LuxaLight expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalogue are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult LuxaLight for the latest dimensions and design specifications.